




go green

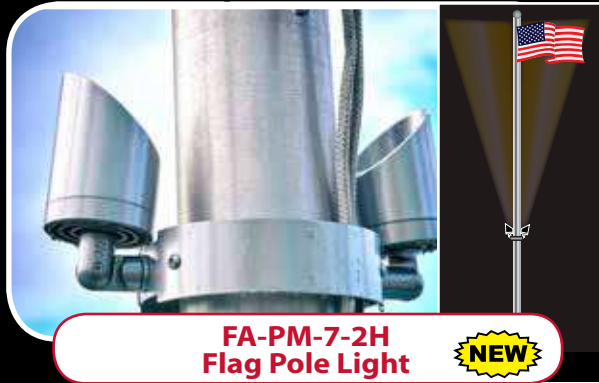

FA-PM-7-2H  
Flag Pole Light

NEW



landscape • architectural • hospitality • entertainment • illumination

# VISUAL PRODUCT INDEX

APRIL 2017

WE ARE LED



SL-16-PAR30WTX  
PAR 30 DOWN LIGHT

NEW



BQ-15-CD14-LED-SS  
COMMERCIAL BARBECUE LIGHT

NEW



CFA-111-TPS4  
POLYESTER TREE  
STRAPS

NEW



SL-11 ABAC-LEDM  
BRASS  
UNDERWATER LIGHT

NEW



FA-TR-204H  
4-6 FIXTURE  
TREE RING SERIES

NEW

Area Lights	2-5
Directional Lights	6-9
Focus Torches	10
Path Lights	11-13
Flood Lights	14-15
Specialty Lights	16-17
Putting Green Lights	18
Well Lights	18
Step, Brick	19-21
Stake & Deck Lights	22
Sconce	22
Underwater Lights	23
Barbecue Lights	24
Umbrella Lights	24
Power Supplies	25-27
Flat Panel LEDs & EOS Modules	28-29
Accessories	30-31
LEDs	32

# Area Lighting

12v / 120v

50,000 HOUR  
LED FLAT PANEL



Model shown:  
RXA-01-LED3-BLT



Catalog #	Height (H)	Width (W)	Std. Material	Opt. Material	Lamp Supplied	LED Opt.	Max	Options (pg.30)
AL-01-AH	14.00"	5.50" dia.	alum.	brass	T3, 20w Halogen (10K)	R/P	25w	ABCEJKLMS
AL-01-SM-AH	11.00"	3.75" dia.	alum.	brass	T3, 20w Halogen (10K)	R/P	25w	ABCEJKLMS
AL-03	14.00"	6.00" dia.	alum.	—	S8, 18w #1141	R/P	25w	ABEKLMS
AL-03-3T	16.00"	6.00" dia.	alum.	—	S8, 18w #1141	R/P	25w	ABEKLMS
AL-03-4T	17.50"	6.00" dia.	alum.	—	S8, 18w #1141	R/P	25w	ABEKLMS
AL-03-10	14.25"	10.00" dia.	alum.	—	S8, 18w #1141	R/P	25w	ABEKLMS
AL-03-3T-10	16.25"	10.00" dia.	alum.	—	S8, 18w #1141	R/P	25w	ABEKLMS
AL-03-4T-10	18.00"	10.00" dia.	alum.	—	S8, 18w #1141	R/P	25w	ABEKLMS
AL-04-AH	14.00"	7.50" dia.	alum.	brass	T3, 20w Halogen (10K)	R/P	25w	ABCEJKLMS
AL-05-AH	17.25"	10.00" dia.	alum.	brass	T3, 20w Halogen (10K)	R/P	25w	ABCEJKLMS
AL-06-AH	16.00"	5.50" dia.	alum.	brass	T3, 20w Halogen (10K)	R/P	25w	ABCEJKLMS
AL-06-SM-AH	11.00"	3.75" dia.	alum.	brass	T3, 20w Halogen (10K)	R/P	25w	ABCEJKLMS
AL-07DC-AH	14.00"	7.00" dia.	alum.	brass	T3, 20w Halogen (10K)	R/P	25w	ABCEJKLMS
AL-08	31.00"	3.00" dia.	ABS	brass, cop., alum.	S8, 18w #1141	R/P	25w	ABCDEHKLMS
AL-08-SM-DM	16.00"	1.75" dia.	cop.	—	S8, 18w #1141	R/P	25w	ABEKLMS
AL-08-SM	23.00"	1.75" dia.	cop.	—	S8, 18w #1141	R/P	25w	ABEKLMS
AL-09	25.50"	7.00" x 7.00"	brass, ABS post	brass, alum. post	S8, 18w #1141	R/P	25w	ABCEHKLMPS
AL-10-LGP	9.00"	12.00" x 12.00"	stamped brass	—	S8, 18w #1141	R/P	50w	ABCEHKLMNPS
AL-12-AH	22.00	8.00" dia.	alum.	brass	T3, 20w Halogen (10K)	R/P	25w	ABCEJKLMS
RXA-01*	17.00"	6.00" dia.	cop.	brass, alum., ss	T4, 20w Halogen (10K)	R	20w	ADEKLMS
RXA-01-2T	17.25"	6.00" dia.	cop.	alum., ss	T4, 20w Halogen (10K)	R	20w	ADEKLMS
RXA-02*	16.00"	3.50" dia.	cop.	alum.	T4, 20w Halogen (10K)	R	20w	ADEKLMS
RXA-03	18.00"	10.00" dia.	cop.	alum.	S8, 18w #1141	R	25w	ADEKLMS
AL-14-AH	23.00"	8.00" dia.	alum.	brass	T3, 20w Halogen (10K)	R/P	25w	ABCEJKLMS
AL-15-AH	19.00"	8.00" dia.	alum.	brass	T3, 20w Halogen (10K)	R/P	25w	ABCEJKLMS
AL-15-SM-AH	13.50"	5.75" dia.	alum.	brass	T3, 20w Halogen (10K)	R/P	25w	ABCEJKLMS
AL-16-AH	19.00"	8.00" dia.	alum.	brass	T3, 20w Halogen (10K)	R/P	25w	ABCEJKLMS
AL-17-SM-AH	13.50"	5.50" dia.	alum.	brass	T3, 20w Halogen (10K)	R/P	25w	BCEKLMS
AL-17-SM2-AH	13.50"	5.50" dia.	alum.	brass	T3, 20w Halogen (10K)	R/P	25w	BCEKLMS
AL-17-AH	19.75"	8.00" dia.	alum.	brass	T3, 20w Halogen (10K)	R/P	25w	BCEKLMS
AL-19-SM-HH-AH*	17.00"	5.50" dia.	cop.	—	T3, 20w Halogen (10K)	R	25w	AEKLMMS
AL-19-HH-AH*	18.00"	8.00" dia.	cop.	—	T3, 20w Halogen (10K)	R	25w	AEKLMMS
AL-20-SM-AH	17.00"	5.50" dia.	cop.	alum.	T3, 20w Halogen (10K)	R	25w	AEKLMMS
AL-20-AH	18.00"	8.00" dia.	cop.	alum.	T3, 20w Halogen (10K)	R	25w	AEKLMMS
AL-21-HBPCOP	17-26"	7.00" dia.	cop.	—	T3, 20w Halogen BP (10K)	R	25w	EKLS <b>NEW!</b>
AL-21S4-HBPCOP	17-26"	4.00" dia.	cop.	—	T3, 20w Halogen BP (10K)	R	25w	EKLS <b>NEW!</b>
AL-21S3-HBPCOP	17-26"	3.00" dia.	cop.	—	T3, 20w Halogen BP (10K)	R	25w	EKLS <b>NEW!</b>
AL-22-01COP	20.00"	9.00" dia.	cop.	—	T3, 20w Halogen BP (10K)	R	25w	EKLS <b>NEW!</b>
AL-22-02COP	20.00"	9.00" dia.	cop.	—	20w MR16	R	25w	EKLS <b>NEW!</b>
AL-22-03COP	20.00"	9.00" dia.	cop.	—	A19	R	25w	EKLS <b>NEW!</b>
AL-23-01COP	20.00"	9.00" dia.	cop.	—	T3, 20w Halogen BP (10K)	R	25w	EKLS <b>NEW!</b>
AL-23-02COP	20.00"	9.00" dia.	cop.	—	20w MR16	R	25w	EKLS <b>NEW!</b>
AL-23-03COP	20.00"	9.00" dia.	cop.	—	A19	R	25w	EKLS <b>NEW!</b>
AL-24-LED3COP	17.00"	6.00" dia.	cop.	—	OMNI-3 LED	P	20w	ADEKLM <b>NEW!</b>

\* Add (-F) into catalog # for Finial



AL-01-AH-LED3-BLT



AL-01-SM-LEDP-BRS



AL-03-LED3-BLT



AL-03-10-LED3-BLT



AL-04-AH-LED3-BAR



AL-05-AH-LED3-BAR



AL-06-AH-LED3-BRS



AL-06-SM-AH-LED3BLT



AL-07DC-AH-LED3-BLT



Top View



AL-08-SM-DM-COP



AL-08-SM-COP



AL-08-LED3-BLT



AL-08-ALUMLED3CAM



AL-09-LEDP-BAV



AL-10-LGP-LEDP-BAV  
(Pedestal mount)



AL-12-AH-LED3-BRS



AL-14-AHLED3-BAV



AL-15-AH-LED3-BAV



AL-15-SM-AH-BAR







AL-16-AH  
-LED3-BAR



AL-17-AH  
-LED3-CAM



AL-17-SM  
-AHLED3-BAR



AL-17-SM2  
-AHLED3-BRS



AL-19-SM  
HHAH-LED3-COP



AL-19-HH  
-AH-LED3-COP

*Hammered Copper  
China Hat*

*Saturn Rings  
Copper China Hat*

Stem expands to 26"



AL-20-SM  
-AH-LED3-CAR



AL-20  
-AH-LED3-CAR



AL-21  
LED3BP-COP



AL-21S4  
LED3BP-COP



AL-21S3  
LED3BPP-COP



Model shown:  
AL-22-03LED3COP



AL-22-01  
LED3COP



AL-22-02  
LED3COP



AL-22-03  
LED3COP



AL-23-01  
LED3COP



AL-23-02  
LED3COP



AL-23-03  
LED3COP



AL-24-  
LED3COP



**RX SERIES/ THE REMEDY/ FOCUS QUALITY AT A REDUCED PRICE POINT**



RXA-01  
-LED3-BRS



RXA-01  
-LED3-WBR



RXA-01  
-LED3-SS



RXA-01-F  
-LED3-COP



RXA-01  
2T-LED3-COP



RXA-01  
2T-LED3-SS



RXA-02  
-LED3-COP



RXA-02  
2T-COP



RXA-02  
-LED3-RST



RXA-02-F  
-LED3-COP



RXA-03  
-LED3-WBR



RXA-03  
-LED3-COP



\* Supplied without stem



AL-03-3T-CAM  
FAL-03-5 (120v)\*  
IAL-03-NL (120v)\*



AL-03-3T-10-ATV  
FAL-03-5-10 (120v)\*  
IAL-03-10-NL (120v)\*



AL-03-4T-BLT  
FAL-04-5,7,9 (120v)\*  
IAL-04-NL (120v)\*



AL-03-4T-10-RST  
FAL-04-5,7,9-10 (120v)\*  
IAL-04-10-NL (120v)\*



AL-03-3T10LED3RBV



AL-03-3T-BLT  
FAL-03-5-3 (120v)\*  
IAL-03-NL-3 (120v)\*



AL-03-3T-10-3-CAM  
FAL-03-5-10-3 (120v)\*  
IAL-03-NL-10-3 (120v)\*



AL-03-4T3-RBV  
FAL-04-5-3 (120v)\*  
IAL-04-NL-3 (120v)\*



AL-03-4T-10-3-HTX  
FAL-04-5-10-3 (120v)\*  
IAL-04-NL-10-3 (120v)\*

Catalog #	Height (H) <sup>1</sup>	Diameter (D)	Standard Material	Lamp Supplied <sup>2</sup>	LED Opt.	Options (pg.30)
FAL-03-5-120V	7.00"	6.00"	cast aluminum	5w CFL	P	B N AA
IAL-03-NL-120V	7.00"	6.00"	cast aluminum	A-19 60w maximum (not supplied)	R/P	B E AA
FAL-03-5-10-120V	7.25"	10.00"	cast aluminum	5w CFL	P	B N AA
IAL-03-10-NL-120V	7.25"	10.00"	cast aluminum	A-19 60w maximum (not supplied)	R/P	B E AA
FAL-04-5,7,9-120V	8.50"	6.00"	cast aluminum	5w, 7w, 9w CFL	P	B E N AA
IAL-04-NL-120V	8.50"	6.00"	cast aluminum	A-19 100w maximum (not supplied)	R/P	B E AA
FAL-04-5,7,9-10-120V	9.00"	10.00"	cast aluminum	7w, 9w CFL	P	B E N AA
IAL-04-10-NL-120V	9.00"	10.00"	cast aluminum	A-19 100w maximum (not supplied)	R/P	B E AA

<sup>1</sup> For: 10", 13", 16", 21" & 26" extension wands see accessories pg.18 <sup>2</sup> For 4-tier only: Also available in quad lamps. Consult factory for price and availability.  
4w Flat Panel LED available add (-LEDP) to catalog # For 120v, 240v, 277v add -120v, -240v, -277v Can mount driver in 3" post, for 1/2" NPS pagoda must mount driver in Jbox or FA-26  
CFL Spirals are available: 13, 18 & 26w 27K only. Specify at time of order.\* Order stem for the above 120v pagodas based on desired height. See pg. 22 for stem options.  
12v fixtures: 25 foot 16/2 fixture lead wire available; add -25F to catalog number. For use with Focus CPC or hub supplied by others.

# LED ORDERING GUIDE

Retrofit LEDs can be factory installed in fixtures or easily installed in the field by simply changing the light bulb.

## Retrofit Plug n Play

<b>Retrofit LED Model</b> .....	<b>Add to part number</b>
12v OMNI-3 .....	LED3
12v OMNI-3BP .....	LED3 (bi-pin)
12v Arrow MR16(BAB) .....	LED
12v Arrow MR16(ESX) .....	LEDESX
12v Arrow Saver MR16 40° .....	LAS40
12v Arrow Saver MR16 15° .....	LAS15
12v Green Creative MR16 15° .....	LGC15
12v Green Creative MR16 35° .....	LGC35
12v Arrow MR11 40° .....	LED
12v Arrow MR11 15° .....	LED15
12v MR8 LED .....	LED
12v Arrow AR111 40° .....	LEDAR11140
12v Arrow AR111 15° .....	LEDAR11115
12v Arrow PAR36 15°/24°/40°/60° .....	LEDP3615/24/40/60

<b>Retrofit LED Model</b> .....	<b>Add to part number</b>
120v Arrow MR16(BAB) .....	LED120V
120v Arrow MR16(ESX) .....	LED120VESX
120v Arrow PAR20 40° .....	LEDP2040
120v Arrow PAR20 15° .....	LEDP2015
120v Arrow PAR30 40° .....	LEDP3040
120v Arrow PAR30 15° .....	LEDP3015
120v Arrow PAR38 40° .....	LEDP3840
120v Arrow PAR38 15° .....	LEDP3815

Flat Panel LEDs are factory installed in fixtures. Field installed LEDP Kits available for some fixtures. See back page for details.

## Panel

<b>Flat Panel LED Model</b> .....	<b>Add to part number</b>
4w, 5w, 8w or 12w Rectangle, 3000K .....	LEDP
4w, 5w, 8w or 12w Rectangle, 5200K .....	LEDP52
2w, 4w or 8w Round, 3000K .....	LEDPR
2w, 4w or 8w Round, 5200K .....	LEDPRS2

## Module

<b>Module LEDs are factory installed in fixtures. Field installed LEDM Kits available for some fixtures. See back page for details</b>	
<b>LED Module Model</b> .....	<b>Add to part number</b>
3w, 3 LED Module .....	LEDM
7w, 6 LED Module 60° Wide Flood Optic .....	LEDM760
7w, 6 LED Module 40° Flood Optic .....	LEDM740
7w, 6 LED Module 15° Spot Optic .....	LEDM715
7w, 6 LED Module Widest Flood (no optics) .....	LEDM7
11w or 15w, 6 LED Module 60° Wide Flood Optic .....	LEDM1160/1560
11w or 15w, 6 LED Module 40° Flood Optic .....	LEDM1140/1540
11w or 15w, 6 LED Module 15° Spot Optic .....	LEDM1115/1515
11w or 15w, 6 LED Module Widest Flood (no optics) .....	LEDM11/LEDM15

## Strip

<b>LED Strip is factory installed. Field Installed LEDS Kit available for SL-44 Series Paver Lights</b>	
<b>LED Strip Model</b> .....	<b>Add to part number</b>
2w & 4w LED Strip .....	LEDS





Catalog #	Height (H)	Width (W)	Std. Material	Opt. Material	Lamp Supplied
AL-05-CP24MR120BLT	24.00"	7.50" dia.	alum.	brass	6w 6w MR16 LED
AL-05CP36-MR120BLT	36.00"	7.50" dia.	alum.	brass	6w MR16 LED
AL-05-CP24LM120BLT	24.00"	7.50" dia.	alum.	brass	15w LED Module
AL-05CP36-LM120BLT	36.00"	7.50" dia.	alum.	brass	15w LED Module
AL-12CP24-MR120BLT	24.00"	5.50" dia.	alum.	brass	6w MR16 LED
AL-12CP36-MR120BLT	24.00"	5.50" dia.	alum.	brass	6w MR16 LED
AL-12CP24-LM120BLT	24.00"	5.50" dia.	alum.	brass	15w LED Module
AL-12CP36-LM120BLT	24.00"	5.50" dia.	alum.	brass	15w LED Module
AL-15CP24-MR120BLT	24.00"	8.00" dia.	alum.	brass	6w MR16 LED
AL-15CP36-MR120BLT	36.00"	8.00" dia.	alum.	brass	6w MR16 LED
AL-15CP24-LM120BLT	24.00"	8.00" dia.	alum.	brass	15w LED Module
AL-15CP36-LM120BLT	36.00"	8.00" dia.	alum.	brass	15w LED Module
AL-17CP24-MR120BLT	24.00"	8.00" dia.	alum.	brass	6w MR16 LED
AL-17CP36-MR120BLT	36.00"	8.00" dia.	alum.	brass	6w MR16 LED
AL-17CP24-LM120BLT	24.00"	8.00" dia.	alum.	brass	15w LED Module
AL-17CP36-LM120BLT	36.00"	8.00" dia.	alum.	brass	15w LED Module

For 12v version remove 120 from part number

AL-05CP36  
-MR120BRS

AL-12CP36  
-LM120BRS

AL-15CP36  
-MR120BRS

AL-17CP36  
-LM120BRS



AL-14-LEDPBAV



## Flat Panel LED's

Newly Engineered Bracket  
For Use With 2w or 4w LED Panel  
The Most Efficient LED Area Lighting On The Market

2w | 150 Lumens / 4w | 300 Lumens  
Optional 120v to 277v\*  
12v Remote Driver Supplied  
4w Is Brighter Than a 20w Halogen  
Available in 3000K Warm White or  
5200K Cool White  
50,000 Hour Round LED Panel  
5 Year Warranty

\*Must use FA-26 mounting post or junction box  
\* Hub not required for 120v-277v applications

**AVAILABLE ON THE FOLLOWING FOCUS AREA LIGHT MODELS**



AL-01-LEDP-BAR



AL-01SM-LEDP-BRS



AL-03-LEDP-BLT (All Models) \*



AL-04-LEDP-BAR



AL-05-LEDP-BRS



AL-06-LEDP-BRS



AL-06SM-LEDP-BLT



AL-07DC-LEDP-BAT



AL-09-LEDP-BAV \*



AL-10LGP-LEDP-BAV \*



AL-12-LEDP-BRS



AL-14-LEDP-BAV



AL-15-LEDP-BAR



AL-15SM-LEDP-BAV



AL-16-LEDP-BRS



AL-16-LEDPBRS



AL-17-LEDP-WBR



AL-17SM-LEDP-BRS



AL-17SM2-LEDP-BAV



AL-01 SM-LEDPBLT

# Directional Spot Lighting 12v /120v

50,000 HOUR  
LED FLAT PANEL



ARROW LED MR16/11/8 PAR36/ALR11

Catalog #	(H)	(W)	(D)	Std. Mat.	Opt. Mat.(s)	10K. Std.	LED opt.	Lamp Supp. <sup>1</sup>	Max	Options (pg.30)
RXD-01	7.50"	2.50" dia.		cast brass	—	OPT	R	MR16, 20w FL (BAB)	50w	B E F I Q R BB
RXD-02	5.50"	2.125" dia.		cop	alum.	OPT	R	MR16, 20w FL (BAB)	35w	E F I Q R BB
RXD-02-TS	5.50"	2.125" dia.		cop	alum.	OPT	R	MR16, 20w FL (BAB)	35w	E F I Q R BB
RXD-03	4.75"	1.75" dia.		cop		OPT	R	MR11, 20w FL (FTD)	20w	E F I X
RXD-03-TS	4.75"	1.75" dia.		cop		OPT	R	MR11, 20w FL (FTD)	20w	E F I X
RXD-04	3.50"	1.40" dia.		cop	alum.		R	MR8, 20w FL	20w	E F I Z
RXD-04-TS	3.50"	1.40" dia.		cop	alum.		R	MR8, 20w FL	20w	E F I Z
RXD-08/-TAC	3.50"	2.25 dia.		brass	ss		R	MR16, 20w FL (BAB)	20w	E F I Q R <b>NEW!</b>
RXD-08/-ETAC	9.25"	2.25 dia.		brass	—		R	MR16, 20w FL (BAB)	20w	E F I Q R <b>NEW!</b>
RXD-09/-TAC	2.875"	1.70 dia.		brass	—		R	MR11, 20w FL (FTD)	20w	E F I X <b>NEW!</b>
RXD-10/-TAC	2.75"	1.20 dia.		brass	—		R	MR8, 20w FL	20w	E F I Z <b>NEW!</b>
DL-03	8.00"	5.00" x 4.50"		cast alum.	brass		—	PAR36, 36w QWFL	50w	B C E
DL-04	9.50"	3.50" x 2.50"		ext. alum.	brass, cop, ss	OPT	R/P	S8, 18w #1141	35w	A B C D E F G K L M S A A
DL-04-HE	10.50"	3.70" x 3.50"		ext. alum.			R/P	20w T3 / S.C. halogen	35w	A B C D E F G K L M S A A
DL-08	10.50"	5.13" dia.		cast alum.	brass	OPT	R/P	S8, 18w #1141	25w	A B C E F K L M S
DL-09	10.50"	5.50" dia.		cast alum.	brass	OPT	R/P	S8, 18w #1141	25w	A B C E F K L M S
DL-09-SM	6.00"	3.75" dia.		cast alum.	brass	OPT	M	5w Xenon	5w	B C E U
DL-10-H	9.00"	5.10" x 3.00"		ext. alum.	—		R/P	35w T4/DC (H)	50w	A B C E F K L M O
DL-10-H-HE	10.50"	5.10" x 3.00"		ext. alum.	—		R/P	35w T4/DC (H)	50w	A B C E F K L M O
DL-13	6.50"	2.60" dia.		cast alum.	brass	OPT	R	MR16, 20w FL (BAB)	50w	B C E F I Q R BB
DL-13-SC	6.50"	2.60" dia.		cast alum.	brass	OPT	R	S8 18w #1141	25w	A B C E F I K L M S
DL-15	7.50"	5.25" x 3.75"		cast alum.	brass	—	R/P	35w T4/DC (H)	75w	A B C E F K L M O A A
DL-15-SM	4.25"	3.25" x 3.75"		cast alum.	brass	—	R/P	20w T4 BP (H)	20w	A B C E F K L M O A A
CDL-15	7.50"	5.25" x 3.75"		comp	—		R/P	35w T4/DC (H)	75w	A E F K L M O A A
CDL-15-MR16FL	7.50"	5.25" x 3.75"		comp	—		—	5w MR16 LED	5w	E F K
DL-17	4.50"	2.00" dia.		cast alum.	brass, cop, ss	OPT	R	MR11, 20w FL (FTD)	35w	B C D E F I X
DL-20-MR16	5.25"	3.50" dia.		cast alum.	brass	OPT	R	MR16, 75w FL (EYC)	75w	B C E F I Q R BB
CDL-20-MR16	5.25"	3.50" dia.		comp	—	OPT	R	MR16, 75w FL (EYC)	75w	E F I Q R BB
CDL-20-AR-70	5.25"	3.50" dia.		comp	—	OPT	—	50w AC-70 FL	50w	B C E F I
C/DL-20AC-MR16	8.75"	3.50" dia.		cast alum.	brass, comp	OPT	R	MR16, 75w FL (EYC)	75w	B C E F I Q R BB
C/DL-20AC-AR70	8.75"	3.50" dia.		cast alum.	brass, comp	OPT	—	50w AC-70 FL	50w	B C E F I
DL-21	4.50"	3.00" dia.		cast alum.	brass	OPT	R	MR16, 20w FL (BAB)	50w	B C E F I Q R
CDL-21	4.50"	3.00" dia.		comp	—	OPT	R	MR16, 20w FL (BAB)	20w	E F I Q R
DL-22	5.50"	2.60" dia.		cast alum.	ss, brass	OPT	R	MR16, 20w FL (BAB)	50w	B C D E F G I Q R BB
DL-22FC-CWM	5.00"	2.375" dia.		cop	alum.	OPT	R	MR16, 20w FL (BAB)	35w	B C E F I Q R BB
DL-22-CWM	5.00"	2.375" dia.		cop	alum.	OPT	R	MR16, 20w FL (BAB)	35w	B C E F I Q R BB
DL-23	3.50"	1.50" dia.		cast alum.	brass	—	R	MR8, 20w FL	20w	B C D E F I Z
DL-40-2H20	8.25"	7.25" dia.		cast alum.	brass	—	R/P	2x 20w T3 halogen	40w	B C D E F I A A
DL-40-2H35	8.25"	7.25" dia.		cast alum.	brass	—	R/P	2x 35w T4 halogen	100w	B C D E F I A A
DL-40-2H50	8.25"	7.25" dia.		cast alum.	brass	—	R/P	2x 50w T4 halogen	100w	B C D E F I A A
DL-40-2X20	8.25"	7.25" dia.		cast alum.	brass	—	R/M	2x 20w T2.5 xenon	40w	B C D E F I A A
DL-41-XBP10	3.875"	2.00"		ext. alum.	brass	—	R/M/P	10w G4 bi-pin xenon	10w	B C E <b>NEW!</b>
DL-42-LEDM7	4.25"	3.00" dia.		cast alum.	brass	cop	—	7w LED Module	7w	B C E <b>NEW!</b>
DL-43-LEDM11	4.25"	3.00" dia.		cast alum.	brass	cop	—	11w LED Module	11w	B C E <b>NEW!</b>
DL-44	5.50"	2.25" sq.		cast alum.	brass	cop	—	20w MR16 FL(BAB)	20w	B C E F I R BB <b>NEW!</b>
DL-45-LEDM15	4.25"	3.00" dia.		cast alum.	brass	cop	—	15w LED Module	11w	B C E

Optional light bulbs: for DL-10 & DL-15; 35 & 50w bi-pin (see pg. 22). For halogen add: -H (10w or 20 w) or -HBP and wattage (5,10, 20,35,50, or 75w) to catalog number.  
 For xenon single contact or bi-pin, add -X (10w or 20w) or -XBP and wattage (5,10 or 20w) to catalog number. -HE models in aluminum only  
 For 120v T4/T7/T8 light bulbs, consult factory for price, wattage and availability. 12v fixtures: 25 foot 16/2 fixture lead wire available; add -25F to catalog number.  
 For use with Focus CPC or hub supplied by others.



Model shown:  
RXD-01-LEDBRS



Model shown:  
RXD-08-TACLEDBAR

**NEW**

## RX SERIES/ THE REMEDY/ FOCUS QUALITY AT A REDUCED PRICE POINT

RXD-01 Series Now Available In Four Finishes

RXD-01-LED-BRS MR16    RXD-01-LEDBAT MR16    RXD-01-LEDBAV MR16    RXD-01-LED-BAR MR16    RXD-02-LED-COP MR16    RXD-02-TS-LED-COP MR16    RXD-02-CAM MR16    RXD-03-LED-COP MR11

**NEW**    **NEW**    **NEW**

RXD-03-TS-LED-COP MR11    RXD-04-LED-COP MR8    RXD-04-TS-LED-COP MR8    RXD-08-LED-SS MR16    RXD-08-LED-BRS MR16    RXD-08TAC-LED-BRS MR16    RXD-08ETAC-LED-BRS MR16



# Directional Spot Lighting

12v /120v



RXD-09-LED-BRS  
MR11



RXD-09TAC-LED-BRS  
MR11



RXD-10-LED-BAR  
MR8



RXD-10TAC-LED-BRS  
MR8



DL-03-LED-BLT  
PAR36



DL-13-LED-BRS  
MR16



DL-17-LED-BAR  
MR11



DL-17-RB-LED-SS  
MR11



DL-20-AC-MR1LED6-BLT  
CDL-20-AC-MR16



DL-20-AR70-BLT  
CDL-20-AR70



DL-21-LED-BRS  
MR16



DL-21-LED-BLT  
CDL-21-LED  
MR16



DL-22-CWM-2-LED-COP  
2x MR16



DL-22-CWM-LED-COP  
MR16



DL-22-LED-SS  
MR16



DL-22-LED-WBR  
MR16



DL-22-LED-BAV  
MR16

15° 40° 60° 7w,11w,15w 50,000 Hour LED Module  
15°/40°/60° Optics for Modules (120° No Optics)

## Integrated LED's

**NEW** **NEW** **NEW**



DL-22-XEC-LED-CAM  
MR16



DL-23-LED-WBR  
MR8

≈ 35w Halogen  
DL-42-LEDM7-BRS

≈ 50w Halogen  
DL-43-LEDM11-CAM

≈ 75w Halogen  
DL-45-LEDM15-BLT



DL-44-LED-CAM  
MR16



# Directional Flood Lighting

50,000 HOUR  
LED FLAT PANEL



DL-04 Models Now available with 4w 50,000 Hour LED PANEL



DL-04-LEDP4W-WBR



DL-04-LED3-BRS



DL-04-LEDP4W-SS



DL-04-LEDP4W-BLT



DL-04-HE-LED3-BLT



Note: -HE Models in Aluminum Only



DL-08-LED3-WBR



DL-09-LED3-BAR



DL-09-SM-LEDM-BRS



DL-10-LEDP-BLT



DL-10-HE-LEDP-BLT



DL-15/-SM Models Now available with 4w 50,000 Hour LED PANEL

**NEW**



DL-15-LEDP-CAM



DL-15-LEDP412V-WBR



CDL-15-MR16FLBLT




DL-15-SM-LEDPR412V-BLT



DL-40-LEDP812V-BRT



DL-41-LEDM-BAR

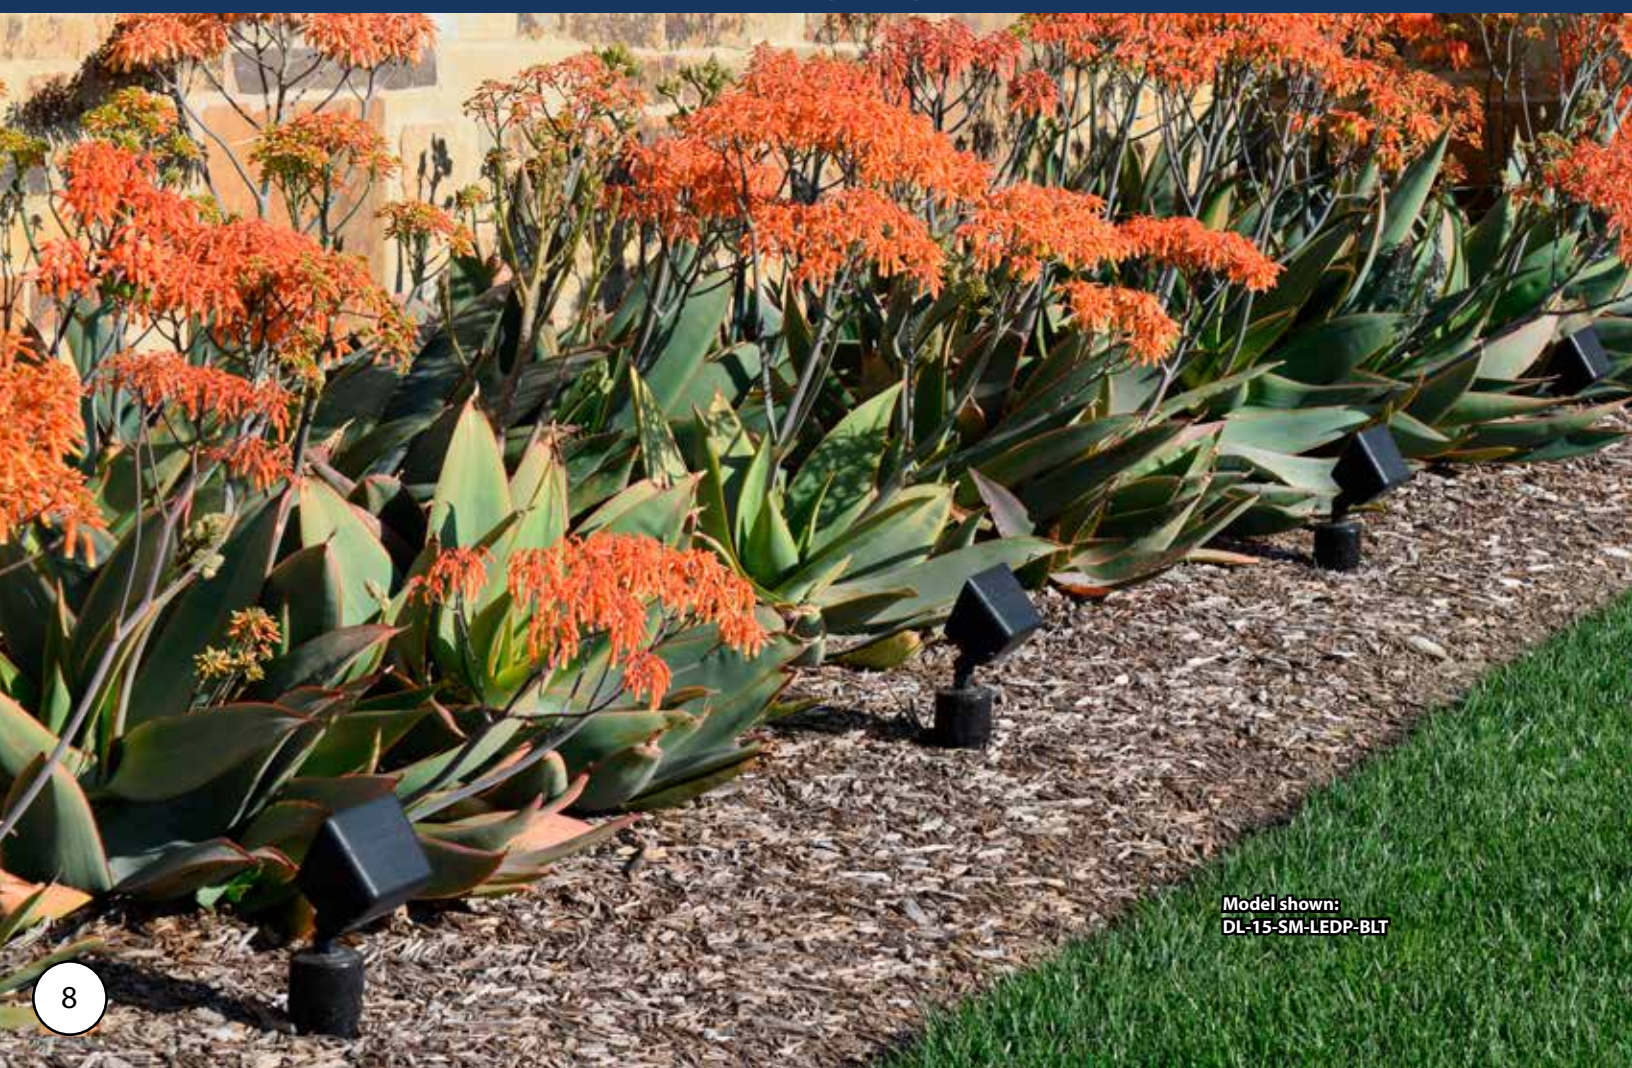

Model shown:  
DL-15-SM-LEDP-BLT



# Directional Lighting



120v/277v  
H. I. D. /Incandescent /Halogen/  
PAR20/PAR30/PAR38



Catalog #	Height (H)	Width (W)	Depth (D)	Standard Material	Opt. Ma.I	Lamp Supplied	LED Opt.	Max	Options (pg. 31)
C/DL-20-NL	5.25"	3.50" diameter		composite/aluminum	brass	none, Par20 available		50w	B CV
C/DL-20-NL-AC	8.75"	3.50" diameter		composite/aluminum	brass	none, Par20 available	R	50w	B CFIV
C/DL-20-NL-HID	5.25"	3.50" diameter		composite/aluminum	brass	none, Par20 available	R	50w	B CFIV
C/DL-20-NL-AC-HID-D	8.75"	3.50" diameter		composite/aluminum	brass	none, Par20 available	R	50w	B CFIV
C/DL-20-NL-EC	5.80"	3.50" diameter		composite/aluminum	brass	none, Par20 available	R	50w	B CFIV
C/DL-20-NL-AC-HID	5.80"	3.50" diameter		composite/aluminum	brass	none, Par20 available	R	50w	B CFIV
DL-30-NL	7.25"	4.50" diameter		cast aluminum	brass	none, Par30 available		75w	B CV
DL-30-NL-AC	13.25"	4.50" diameter		cast aluminum	brass	none, Par30 available	R	75w	B CF INV
DL-30-NL-EC	8.13"	4.50" diameter		cast aluminum	brass	none, Par30 available	R	75w	B CF INV
DL-30-NL-HID	7.25"	4.50" diameter		cast aluminum	brass	none, Par30 available	R	100w	B CFIV
DL-30-NL-AC-HID	13.25"	4.50" diameter		cast aluminum	brass	none, Par30 available	R	100w	B CFIV
C/DL-38-NL	7.75"	5.50" diameter		composite/aluminum	brass	none, PAR38 available		150w	B CFV
C/DL-38-NL-AC	15.75"	5.50" diameter		composite/aluminum	brass	none, PAR38 available	R	150w	B CFH INV
C/DL-38-NL-EC	7.75"	5.50" diameter		composite/aluminum	brass	none, PAR38 available	R	150w	B CFH INV
C/DL-38-NL-HID	7.75"	5.50" diameter		composite/aluminum	brass	none, PAR38 available	R	175w	B CFIV
C/DL-38-NL-HID-D	7.75"	5.50" diameter		composite/aluminum	brass	none, PAR38 available	R	175w	B CFIV
C/DL-38-NL-EC-L	9.13"	5.50" diameter		composite/aluminum	brass	none, PAR38 available	R	175w	B CFH IN
C/DL-38-NL-AC-HID	15.75"	5.50" diameter		composite/aluminum	brass	none, PAR38 available	R	175w	B CFH INV
DL-40-LEDP120V	7.75"	9.33"x7.25"		cast aluminum	brass	8w LED Panel		8w	B CDFI
RXD-05-NL	9.25"	3.00" diameter		cast aluminum	brass,copper	none, PAR20 available	R	50w	B CFIV <b>NEW!</b>
RXD-05-NL-TS	9.25"	3.00" diameter		cast aluminum	brass,copper	none, PAR20 available	R	50w	B CFIV <b>NEW!</b>

Note: For HID ballast information, consult ballast section pg. 13.  
Note: For Downlights, add -D to catalog number. Downlights supplied with no weep hole or cap & sealed swivel.  
Note: DL-16 & DL-40 supplied with integral ballast.  
Note: ARROW LED PAR20/30/38 may only be used with fixtures that have either an extended cap (-EC) or angle collar (-AC) with lens installed.



Model shown:  
DL-40-LEDP120VBRT

DL-40-LEDP52120V-BLT

C/DL-20-NL-HID-D-BLT  
C/DL-20-NL-D-BLT

DL-20-NL-AC-LEDP2040-BLT  
DL-20-NL-AC-HID-BLT

DL-20-NL-CAM

DL-20EC-LEDP2040BLT  
DL-20-NL-HID-BLT

DL-30-NL-HID-D-BLT  
DL-30-NL-D-BLT

DL-30-NL-BRS

DL-30-LEDP304-AC-BLT  
DL-30-LEDP304-AC-HID-BLT

DL-30-EC-LEDP3040-BLT  
DL-30-NL-HID

DL-38-NL-D-BLT  
DL-38-NL-HID-D-BLT

DL-38-NL-BRS  
C/DL-38-NL

DL-38-AC-LEDP3840-BLT  
C/DL-38-NL-AC  
C/DL-38-NL-AC-HID

C/DL-38EC-LEDP3840RBV  
C/DL-38-NL-HID

**NEW** RX SERIES/ PAR20

RXD-05-LED2040  
PAR20

RXD-05-TS-LEDP2040-WTX  
PAR20

Model shown:  
DL-38-ECL-LEDP3840BRT  
DB-12-75





## Liquid Focus Torches & Area Light



AL-18SM -LED3-COP    AL-18LG -LED3-COP    AL-18LG-HH SB-LED3-CAR

## Gas (-NG) or Propane (-P) Focus Torches




AL-18LG-NG-BAV    AL-18LG-P-BAT

## Gas (-NG) or Propane (-P) Cylinder Plasma Cut Focus Torches



AL-18CY-NG-006SS

## Gas (-NG) or Propane (-P) Plasma Cut Stainless Steel Focus Torches **NEW** Custom Designs Available

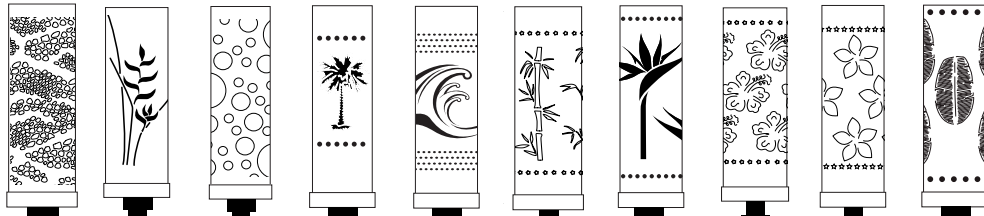

Sandstone -001    Heliconia -002    Circles -003    Palm -004    Waves -005    Bamboo -006    BOP -007    Hibiscus -008    Plumeria -009    Banana Leaf -010



Gas/Propane  
AL-18CY-009-NG-SS (Plumeria)

Focus Torch Lights	Height	Diameter	Std. Mat.	Opt. Mat.	Lamp Supplied	Options (pg. 31)
AL-18-LG-AH <sup>2,3</sup>	77"	7.00"	cop.	—	20w T4 SC.	R B D F S
AL-18-LG-AHHH <sup>2,3</sup>	77"	7.00"	cop.	—	20w T4 SC.	R B D F S
AL-18-SM-AH	25"	4.50"	cop.	—	20w T4 SC.	R B D F S
AL-18-SM-AHHH	25"	4.50"	cop.	—	20w T4 SC.	R B D F S
AL-18-CY-NG/-P-XXX-SS <sup>2,3</sup>	12.50"	3.25"	stainless steel	—	NA	— G

<sup>2</sup>Add(-NB) for natural or (-BB) for brass bamboo stem. <sup>3</sup>Add(-NG) for natural gas or (-P) for propane (Note: no area light on -NG & -P models).

### Accessories

- FA-SB-PVC6U Simulated Bamboo, Unfinished
- FA-SB-PVC6P Simulated Bamboo, Brown
- FA-SB-PVC6B Simulated Bamboo, Black PVC
- FA-SB-PVC6G Simulated Bamboo, Green



Simulated or Brass Bamboo Stems & Hammered Hats



Liquid & Light  
AL-18SM-LED3-COP



FA-AL18LG-GAS-BPC-COP

Cap aids in alleviating bird droppings on gas /propane fixtures



### New Thatch Skirt



Gas/Propane


**NEW**

FA-AL-18LGNP-SKIRT: GRASS FOCUS TORCH SKIRT, 1.7" ID FOR AL-18-LG NG/P GAS FOCUS TORCH SERIES



Gas/Propane

AL-18LG-NGCOP

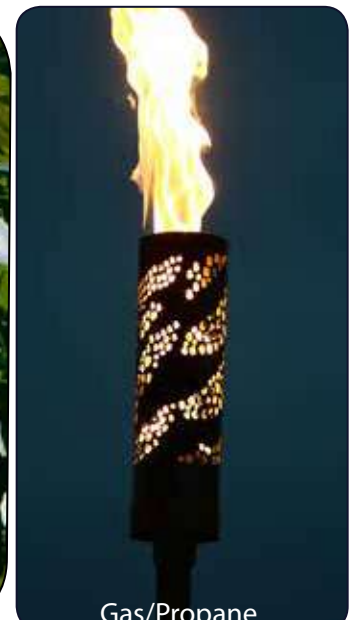

Gas/Propane


AL-18CY-001-NG-SS (Sandstone)



# Path Lighting



50,000 HOUR LED FLAT PANEL

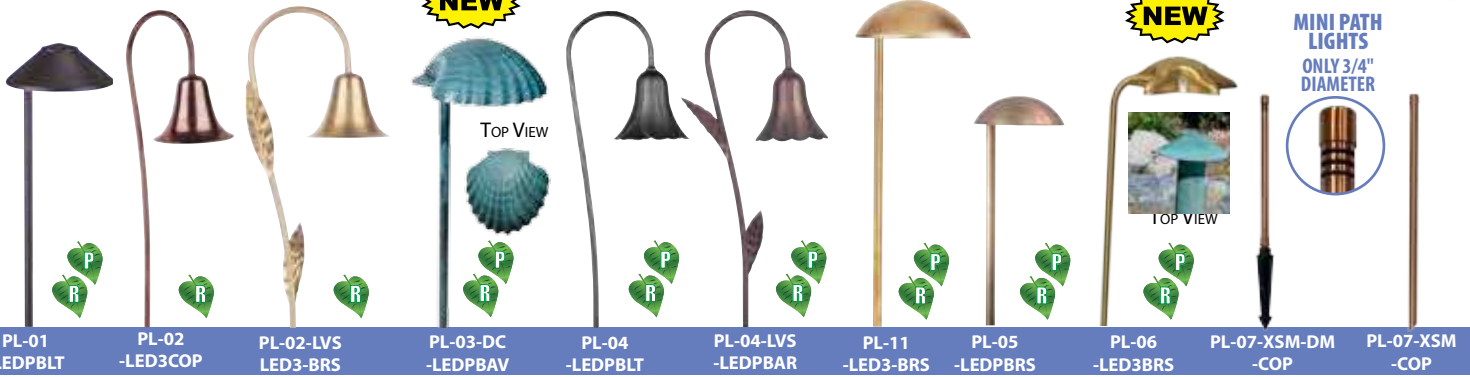

**NEW**

**NEW**

MINI PATH LIGHTS  
ONLY 3/4" DIAMETER

Top View

TOP VIEW

PL-01 -LEDPBLT    PL-02 -LED3COP    PL-02-LVS LED3-BRS    PL-03-DC -LEDPBAV    PL-04 -LEDPBLT    PL-04-LVS -LEDPBAR    PL-11 -LED3-BRS    PL-05 -LEDPBRS    PL-06 -LED3BRS    PL-07-XSM-DM -COP    PL-07-XSM -COP



PL-07 -LEDPBRS    PL-09 -LED3BAR    PL-12 -LEDPBAR    PL-13 -LED3COP    PL-14 -LED3BRS    PL-15 -LED3COP    PL-16 -LED3COP    PL-17 -LEDPBRS    PL-19 -LED3BAR

18"-24" LENGTHS • CUSTOM LENGTHS AVAILABLE



**NEW**

**NEW**

**NEW**

**NEW**

**NEW**

**NEW**

PL-20 -LEDPBBBAV    PL-21 -LEDPWIR    PL-22 -LEDPBAR    PL-23-DM24 -LEDPBAR    PL-23-28 -LEDRST    PL-23-18-S2 -LEDPWTX    PL-23-18-S3 -LEDPBRS    PL-23-24-S4 -LEDPBRS

## RX SERIES/ THE REMEDY/ FOCUS QUALITY AT A REDUCED PRICE POINT



**NEW**

**NEW**

**NEW**

**NEW**

RXP-01 -LEDCAM    RXP-02 -LEDCOP    RXP-03 -LEDBRS    RXP-03TAC -LEDBAT    RXP-04 -LEDBRS    RXP-04TAC -LEDBRS

Catalog #	Height (H)	Width (W) Depth (D)	Standard Material	Optional Material(s)	Lamp Supplied	LED opt	Max	Options (pg.30)
PL-01	19.00"	5.13" diameter	cast alum.	brass	S8, 18w #1141	R/P	25w	ABCEFKLMS
PL-02	22.00"	4.50" diameter	cast alum.	brass, copper	S8, 18w #1141	R/P	25w	ABCDEGKLMS
PL-02-LVS	22.00"	4.50" diameter	cast alum.	brass, copper	S8, 18w #1141	R	25w	ABCDEGKLMS
PL-03DC	19.00"	5.50" diameter	cast alum.	brass	S8, 18w #1141	R	25w	ABCEFKLMS
PL-04	22.00"	4.50" diameter	cast alum.	brass	S8, 18w #1141	R	25w	ABCEFKLMS
PL-04-LVS	22.00"	4.50" diameter	cast alum.	brass	S8, 18w #1141	R	25w	ABCEFKLMS
PL-05	19.00"	5.50" diameter	cast alum.	brass	S8, 18w #1141	R/P	25w	ABCEFKLMS
PL-06	21.50"	7.00" diameter	cast alum.	—	S8, 18w #1141	R/P	25w	ABCEFKLMS
PL-07-XSM-DM	16.50"	.75" diameter	extruded copper	—	T3 10w bi-pin xenon	—	10w	B
PL-07-XSM	24.00"	.75" diameter	extruded copper	—	T3 10w bi-pin xenon	—	10w	B
PL-07	31.00"	3.00" diameter	ABS	alum., brass, copper	S8, 18w #1141	R/P	25w	ABCDEHKLMS
PL-07-LGX-CL-BRS	31.00"	4.00" diameter	cast alum./custom logo	brass, copper	20w S.C. xenon	R/P	25w	ABCEHKLMS
PL-09	29.00"	7.00" x 10.00"	stamped brass	—	S8, 18w #1141	R/P	25w	ABEHKLMS
PL-11	24.00"	8.00" diameter	cast alum.	brass	S8, 18w #1141	R/P	25w	ABCEHKLMS
PL-12	31.50"	8.00" diameter	cast alum.	brass	S8, 18w #1141	R/P	25w	ABCEKLMS
PL-13	26.50"	5.00" diameter	copper, brass accents	—	S8, 18w #1141	R	25w	ABCEKLMS
PL-14	16.25"	5.25" x 5.25"	stamped brass	—	S8, 18w #1141	R	25w	ABEKLMS
PL-15	20.50"	5.5" diameter	copper	—	S8, 18w #1141	R	25w	ABEKLMS
PL-16	24.00"	5.5" diameter	copper	—	S8, 18w #1141	R	25w	ABEKLMS
PL-17	20.00"	5.00" diameter	extruded alum.	brass	T3 20w S.C. halogen	R/P	20w	ABCKSMLS
PL-19	22.00"	5.50" diameter	spun brass	—	S8, 18w #1141	R	25w	ABCKLM
PL-20	20.00"	5.75" diameter	cast alum.	brass	S8, 18w #1141	R	25w	ABCEKLMS
PL-21	24.50"	5.75" diameter	cast alum.	brass	S8, 18w #1141	R	25w	ABCEKLMS
PL-22	18.125"	2.25" diameter	cast alum.	brass	S8, 18w #1141	R	25w	ABCEMAA NEW!
PL-2318/-24	18" / 24"	2.25" diameter	alum.	brass	S8, 18w #1141	R	25w	ABCEMAA NEW!
PL-23-DM-18/-24	18" / 24"	2.25" diameter	alum.	brass	S8, 18w #1141	R	25w	ABCEMAA NEW!
PL-23-S2-18/-24	18" / 24"	2.25" diameter	alum.	brass	4w LEDP	R	25w	BCAA NEW!
PL-23-S3-18/-24	18" / 24"	2.25" diameter	alum.	brass	4w LEDP	R	25w	BCAA NEW!
PL-23-S4-18/-24	18" / 24"	2.25" diameter	alum.	brass	4w LEDP	R	25w	BCAA NEW!
RXP-01	26.00"	2.125" diameter	cast alum.	copper	MR16, 20w FL(BAB)	R	50w	EFIQRBB NEW!
RXP-02	26.00"	2.125" diameter	cast alum.	copper	2x MR16, 20w FL(BAB)	R	50w	EFIQRBB NEW!
RXP-03	25.00"	2.25" diameter	cast brass	—	MR16, 20w FL(BAB)	R	20w	EFIQR NEW!
RXP-04	25.00"	2.25" diameter	cast brass	—	2x MR16, 20w FL(BAB)	R	40w	EFIQR NEW!
RXP-03-ETAC	25.00"	2.25" diameter	cast brass	—	MR16, 20w FL(BAB)	R	20w	EFIQR NEW!
RXP-04-ETAC	25.00"	2.25" diameter	cast brass	—	2x MR16, 20w FL(BAB)	R	40w	EFIQR NEW!



Optional light bulbs: PL-01 to PL-16, PL-20 & PL-21 (#93, 12w) or (#1156, 25w). For halogen, add -H or -HPB and wattage to catalog number. For xenon add -X or -XBP and wattage to catalog number. For 120v T7 or T8 light bulbs, consult factory for price and availability. 12v fixtures: 25 foot 16/2 fixture lead wire available; add -25F to catalog number. For use with Focus CPC or hub supplied by others.

Simulated PVC or brass bamboo stems options for: PL-01/PL-20/PL-21. For brass stem add -BB to catalog number. For simulated PVC stem add -SB to catalog number.



# Commercial Path Lighting



12v / 120v - 277v



Catalog #	Height (H)	Width (W)	Std. Material	Lamp Supplied
PL-24-181BLT	52.00"	2.00" dia.	alum.	S8, 18w #1141
PL-24-182BLT	52.00"	2.00" dia.	alum.	2x S8, 18w #1141
PL-24-071BLT	52.00"	2.00" dia.	alum.	S8, 18w #1141
PL-24-072BLT	52.00"	2.00" dia.	alum.	2x S8, 18w #1141
PL-24-07SM1BLT	52.00"	2.00" dia.	alum.	5w Xenon
PL-24-07SM2BLT	52.00"	2.00" dia.	alum.	2x 5w Xenon
PL-24-07SM1LEDMBLT	52.00"	2.00" dia.	alum.	3w LED Module
PL-24-07SM2LEDMBLT	52.00"	2.00" dia.	alum.	2x 3w LED Module





# Path Lighting: Flat Panel LED's

Model shown:  
PL-22-LEDP-WTX

## PATH LIGHT FLAT PANEL LEDS

Newly Engineered Bracket  
For Use With 2w or 4w LED Panel

The Most Efficient LED Area Lighting On The Market

# ONLY FROM FOCUS

2w | 150 Lumens / 4w | 300 Lumens

Optional 120v to 277v\*

12v Remote Driver Supplied

4w Is Brighter Than a 20w Halogen

Available in 3000K Warm White or

5200K Cool White

50,000 Hour Round LED Panel

5 Year Warranty

\*Must use FA-26 mounting post or junction box  
for 120v-277v applications



### AVAILABLE ON THE FOLLOWING FOCUS PATH LIGHT MODELS



PL-01-LEDP-BLT



PL-03DC-LEDP-BAT



PL-04-LEDP-BLT



PL-05-LEDP-BRS



PL-09-LEDP-BAR



PL-11-LEDP-BRS



PL-12-LEDP-BRT



PL-20-LEDP-WBR



PL-21-LEDP-WIR



PL-22-LEDP-BAR



PL-23-LEDP-BRS



PL-01-LEDP-BLT



PL-09-LEDP-BAV



### 3 Lens Options:

Clear (Std) |

Sand Blast reduces light output by 10%; warms to 2900K

White reduces light output by 20%; warms to 2700K



## LFL-01 & LFL-02 SERIES LED Panel Flood Lights


**NEW**

8.25"



LFL-01-LEDP8-BLT

13.00"



LFL-01-LEDP12-BRT

13.00"



LFL-01-LEDP24-BLT

12.50"



LFL-02-HE2753-BRT

**NEW**

24.00"



LFL-01-2LEDP8-CAM

36.00"



LFL-01-3LEDP8-BLT

**NEW**

48.00"



LFL-01-4LEDP8-BLT



Model shown:  
LFL-01-8LEDP120VBLT



Model shown:  
LFL-01-2LEDP120VWTX



# Flood Lighting

120v/277v



Model shown:  
LFL-01-LEDP120VBTLT

Catalog #	Height (H)	Width (W)	Depth (D)	Standard Material	Opt. Material	Lamp Supplied <sup>1</sup>	Options (pg.30)
FFL-7	4.50"	6.00"	3.00"	extruded aluminum	—	7w CFL	B F
FFL-7-HE	6.30"	6.10"	3.00"	extruded aluminum	—	7w CFL	B F
FFL-9,13	4.50"	8.25"	3.00"	extruded aluminum	—	9w or 13w CFL	B F D
FFL-9,13-HE	6.30"	8.35"	3.00"	extruded aluminum	—	9w or 13w CFL	B F D
FFL-26	4.50"	8.25"	3.00"	extruded aluminum	—	2 x 13w CFL	B F
FFL-26-HE	6.30"	8.35"	3.00"	extruded aluminum	—	2 x 13w CFL	B F
FFL-13,26-CST/P	6.25"	8.25"	3.00"	cast aluminum	brass	13w or 2x 13w CFL	B C F
FFL-26,32,42-CST/-HE <sup>2</sup>	6.25"	8.25"	3.00"	cast aluminum	brass	26, 32, 42w,	B C F
FFL-24-T5HO-30K/-HE*	4.50"	24.00"	3.00"	extruded aluminum	—	1 x 24w (30K) T5HO	B F
FFL-39-T5HO-30K/-HE*	4.50"	35.00"	3.00"	extruded aluminum	—	1 x 39w (30K) T5HO	B F
FFL-54-T5HO30KMV/-HE <sup>3</sup>	4.50"	47.00"	3.00"	extruded aluminum	—	1 x 54w (30K) T5HO	B F
FFL-17-T8-30K*	3.00"	26.00"	3.00"	extruded aluminum	—	1 x 17w (30K) T8	B F
FFL-25-T8-30K*	3.00"	38.00"	3.00"	extruded aluminum	—	1 x 25w (30K) T8	B F
FFL-32-T8-30K*	3.00"	50.00"	3.00"	extruded aluminum	—	1 x 32w (30K) T8	B F
LFL-01-LEDP812VBTL	4.50"	8.25"	3.00"	extruded aluminum	—	8w 12v LED PANEL	B F D <b>NEW!</b>
LFL-01-HELEDP812VBTL	6.30"	8.25"	3.00"	extruded aluminum	—	8w 12v LED PANEL	B F D <b>NEW!</b>
LFL-01-LEDP8120VBTL	4.50"	8.25"	3.00"	extruded aluminum	—	8w 120v LED PANEL	B F D <b>NEW!</b>
LFL-01-HELEDP8120VBTL	6.30"	8.25"	3.00"	extruded aluminum	—	8w 120v LED PANEL	B F D <b>NEW!</b>
LFL-01-LEDP1212VBTL	4.50"	13.00"	3.00"	extruded aluminum	—	12w 12v LED PANEL	B F D <b>NEW!</b>
LFL-01-HELEDP1212VBTL	6.30"	13.00"	3.00"	extruded aluminum	—	12w 12v LED PANEL	B F D <b>NEW!</b>
LFL-01-LEDP12120VBTL	4.50"	13.00"	3.00"	extruded aluminum	—	12w 120v LED PANEL	B F D <b>NEW!</b>
LFL-01-HELEDP12120VBTL	6.30"	13.00"	3.00"	extruded aluminum	—	12w 120v LED PANEL	B F D <b>NEW!</b>
LFL-01-LEDP2412VBTL	4.50"	13.00"	3.00"	extruded aluminum	—	2x12w 12v LED PANEL	B F D <b>NEW!</b>
LFL-01HE-LEDP2412VBTL	6.30"	13.00"	3.00"	extruded aluminum	—	2x12w 12v LED PANEL	B F D <b>NEW!</b>
LFL-01-LEDP24120VBTL	4.50"	13.00"	3.00"	extruded aluminum	—	2x12w 120v LED PANEL	B F D <b>NEW!</b>
LFL-01HE-LEDP24120VBTL	6.30"	13.00"	3.00"	extruded aluminum	—	2x12w 120v LED PANEL	B F D <b>NEW!</b>
LFL-02-HE2727	9.00"	12.50"	7.55"	brass	aluminum	27w 120v LED PANEL, 2700K	B <b>NEW!</b>
LFL-02-HE2753	9.00"	12.50"	7.55"	brass	aluminum	27w 120v LED PANEL, 5300K	B <b>NEW!</b>
LFL-001-2LEDP8120V	4.50"	24.00"	3.00"	aluminum	—	2x 8w LED PANEL	B <b>NEW!</b>
LFL-001-3LEDP8120V	4.50"	36.00"	3.00"	aluminum	—	3x 8w LED PANEL	B <b>NEW!</b>
LFL-001-4LEDP8120V	4.50"	48.00"	3.00"	aluminum	—	4x 8w LED PANEL	B <b>NEW!</b>
LFL-001-6LEDP8120V	4.50"	72.00"	3.00"	aluminum	—	6x 8w LED PANEL	B <b>NEW!</b>
LFL-001-8LEDP8120V	4.50"	93.00"	3.00"	aluminum	—	8x 8w LED PANEL	B <b>NEW!</b>

\* Above fixtures also available in 3500K, 4100K, Specify at time of order. For two lamp models add -2L to catalog number.

#FFL-54 Series only available in multi-volt

Note: Also available in 240v and 277v models. Add -HE into catalog # for hood extension. (For FFL-24/39/54)

<sup>1</sup>Above fixtures are supplied with cool white (4100K) lamps. For warm white (2700K) add -WW to catalog number. Other Kelvin temperatures available, consult factory. <sup>2</sup> CFL= 4100K & 10,000 hours average rating / Triple Tube = 4100K & 12,500 hours average rating Note: CFL are standard black ABS for bronze ABS add -BRT to catalog number.



FFL-7-CAM



FFL-7-HE-HTX



FFL-9,13-BRT



FFL-13-HE-RST



FFL-13-CST-CAM



FFL-32-3T-CST-BRT



FFL-26-BLT



FFL-26-HE-BLT



FFL-24-T5HO-BLT / FFL-17-T8-BLT



FFL-39-T5HO-WBR / FFL-25-T8-WBR



Model shown:  
FFL-39-T5HO-HTX  
on two FA-26-HTX  
Mounting Pedestals



FFL-54-T5HO-MVBTLT / FFL-32-T8-BLT

# Specialty Lighting



## 12v / 120v Down Lights • Hanging and Surface

Catalog #	Height (H)	Width (W)	Depth (D)	Standard Material	Optional Material(s)	Lamp Supplied	Led opt.	Max	Options (pg.30)
SL-05	4.75"	4.50" diameter		spun aluminum	brass, copper	S8, 18w #1141	R	25w	ABCDEGKLM S
SL-05-WM	9.75"	4.50" x 8.50"		aluminum hat	brass	S8, 18w #1141	R	25w	ABCEKLM S
SL-06	4.25"	4.50" diameter		cast aluminum	brass	S8, 18w #1141	R	25w	ABCEKLM S
SL-06-WM	9.75"	4.50" x 8.50"		aluminum hat	brass	S8, 18w #1141	R	25w	ABCEKLM S
SL-09	3.00"	2.50" diameter		spun aluminum	brass, copper	S8, 18w #1141	R	25w	ABCDEKLM S
SL-09-AB	3.00"	2.50" diameter		spun aluminum	brass, copper	S8, 18w #1141	R	25w	ABCDEKLM S
SL-09-ALR12	3.00"	2.50" diameter		spun aluminum	brass, copper	20w ALR12 (FL)	—	20w	BCDE
SL-09-ALR12-AB	3.00"	2.50" diameter		spun aluminum	brass, copper	20w ALR12 (FL)	—	20w	BCDE
SL-10-ALR18	4.00"	3.00" diameter		spun aluminum	brass, copper	50w ALR18 (FL)	—	50w	BCDE
SL-10-ALR18-AB	4.00"	3.00" diameter		spun aluminum	brass, copper	50w ALR18 (FL)	—	50w	BCDE
SL-12	8.50"	7.00" x 7.00"		stamped brass	—	S8, 18w #1141	R/P	25w	ABEHKLM S AA
SL-13	11.50"	4.00" x 9.10"		stamped brass	—	S8, 18w #1141	R/P	25w	ABCEKLM S AA
SL-14	5.90"	2.50" diameter		extruded aluminum	brass, copper	S8, 18w #1141	R	25w	ABCEKLM Q S
SL-15	5.90"	2.50" diameter		extruded aluminum	brass, copper	S8, 18w #1141	R	25w	ABCEKLM Q S
SL-15-10CSM	12.00"	2.50" diameter		extruded aluminum	brass, copper	S8, 18w #1141	R	25w	ABCEKLM Q S
SL-15-LW10	10.00"	2.50" diameter		extruded aluminum	brass, copper	S8, 18w #1141	R	25w	ABCEKLM Q S
SL-15-LW04	4.00"	2.50" diameter		extruded aluminum	brass, copper	S8, 18w #1141	R	25w	ABCEKLM Q S
SL-16	5.00"	2.50" x 4.70"		extruded aluminum	brass	S8, 18w #1141	R	25w	ABCEM S
SL-16-MR16-SS	5.50"	2.50" x 3.25"		stainless steel	brass	2x20w MR16 FL(BAB)	R	40w	E F I Q R
SL-16-ETCMR16-BRS	13.50"	3.00" x 3.25"		brass	—	2x20w MR16 FL(BAB)	R	40w	E F I Q R
SL-16-DMR16-SS	3.625"	3.00" x 3.25"		stainless steel	brass	20w MR16 FL(BAB)	R	20w	E F I Q R
SL-16-DETCMR16-BRS	7.50"	3.00" x 3.25"		brass	—	20w MR16 FL(BAB)	R	20w	E F I Q R
SL-16-DMR11	3.00"	2.50" x 2.50"		brass	—	20w MR11 FL(BAB)	R	20w	B E F I R X
SL-16-DMR8	3.00"	2.50" x 2.00"		brass	—	20w MR8 FL(BAB)	R	20w	B E F I R Z
SL-16-NLPAR20	11.00"	3.00" diameter		extruded aluminum	brass	None	R	20w	A B E
SL-16D-NLPAR20	5.50"	3.00" diameter		extruded aluminum	brass	None	R	20w	A B E
SL-16-NLPAR30	13.00"	3.00" diameter		extruded aluminum	brass	None	R	30w	A B E
SL-16D-NLPAR30	7.25"	3.00" diameter		extruded aluminum	brass	None	R	30w	A B E
SL-16-MR16-S1/S2/S3SS	7.50"	3.00" x 3.25"		stainless steel	brass	2x20w MR16 FL(BAB)	R	20w	E F I Q R
SL-16D-MR16-S1/S2/S3SS	7.50"	3.00" x 3.25"		stainless steel	brass	20w MR16 FL(BAB)	R	20w	E F I Q R
SL-16P-MR16-S1/S2/S3SS	7.50"	3.00" x 3.25"		stainless steel	brass	20w MR16 FL(BAB)	R	20w	E F I Q R
SL-25	5.25"	2.50" diameter		cast aluminum	brass	20w MR16 FL(BAB)	R	20w	BCDE F I Q R BB
SL-25-XEC	5.25"	2.00" diameter		cast aluminum	brass	20w MR16 FL(BAB)	R	20w	BCDE F I Q R BB
SL-26	4.75"	2.50" diameter		cast aluminum	brass	20w MR11 FL(FTD)	R	20w	BCDE F I X
SL-27	3.00"	2.00" diameter		spun aluminum	brass, copper	20w ALR12 (FL)	—	20w	BCDE
SL-28	4.00"	3.00" diameter		spun aluminum	brass, copper	50w ALR18 (FL)	—	50w	BCDE
RXS-01	5.25"	3.27" diameter		unfinished copper	—	20w MR16 FL(BAB)	R	35w	A B E Q R BB
RXS-02	4.75"	1.87" diameter		unfinished copper	—	20w MR11 FL(FTD)	R	20w	A B E X
RXS-03	3.50"	1.50" diameter		unfinished copper	—	20w MR8 FL	R	20w	A B E Z
RXS-04	5.25"	2.25" diameter		unfinished copper	—	20w MR16 FL(BAB)	R	35w	A B E Q R BB
RXS-05	4.75"	1.75" diameter		unfinished copper	—	20w MR11 FL(FTD)	R	20w	A B E X
RXS-06	3.50"	1.50" diameter		unfinished copper	—	20w MR8 FL	R	20w	A B E Z
RXS-07	5.25"	2.25" diameter		unfinished copper	—	20w MR16 FL(BAB)	R	35w	A B E Q R BB
RXS-08	4.75"	1.75" diameter		unfinished copper	—	20w MR11 FL(FTD)	R	20w	A B E X
RXS-09	3.50"	1.25" diameter		unfinished copper	—	20w MR8 FL	R	20w	A B E Z
RXS-10	8.50"	3.15" diameter		unfinished copper	aluminum, brass	none	R	50w	A B E
RXS-11	8.50"	3.15" diameter		unfinished copper	aluminum, brass	none	R	50w	A B E
RXS-12	4.25"	2.25" diameter		cast brass	—	none	R	50w	A B E
RXS-13	3.50"	1.75" diameter		cast brass	—	none	R	50w	A B E
RXS-14	3.50"	1.25" diameter		cast brass	—	none	R	50w	A B E
SL-52-SH/-ST	7.00"	6.00" diameter		cast brass	—	S8, 18w #1141	R	25w	A B C E L M S
SL-53	5.50"	2.25" square		cast aluminum	brass	20w MR16 FL(BAB)	R	50w	B D E F Q R B B
SL-54	5.50"	2.25" square		cast aluminum	brass	20w MR16 FL(BAB)	R	50w	B D E F Q R B B
SL-55-S*	7.00"	6.25"		cast aluminum	brass	5w/7w CFL	P	7w	B E H Q A A
SL-55-M*	10.00"	7.25"		cast aluminum	brass	5w/7w CFL	P	7w	B E H Q A A
SL-55-L*	12.00"	8.25"		cast aluminum	brass	5w/7w CFL	P	7w	B E H Q A A
SL-55-X*	16.00"	9.25"		cast aluminum	brass	5w/7w CFL	P	7w	B E H Q A A
SL-56-S	7.00"	6.25"		cast aluminum	brass	5w/7w CFL	P	7w	B E H Q A A
SL-56-M	10.00"	7.25"		cast aluminum	brass	5w/7w CFL	P	7w	B E H Q A A
SL-56-L	12.00"	8.25"		cast aluminum	brass	5w/7w CFL	P	7w	B E H Q A A
SL-56-X	16.00"	9.25"		cast aluminum	brass	5w/7w CFL	P	7w	B E H Q A A
SL-57	3.50"	3.50"		cast aluminum	brass	2w/4w LED	P	7w	B E H Q A A
SL-58	8.25"	2.25" square		cast aluminum	brass	SC LED	P	4w	B E Q A A
SL-63	4.75"	2.25" square		cast aluminum	brass	20w MR16 FL(BAB)	R	50w	B D E F Q R B B



Model shown: SL-16-MR16-ETC-LEDLGBRS

Note: All hanging fixtures supplied with 18" brass baby oval chain and mini J-Box (FA-111-SM-H). White fixtures are supplied with white 18/2 lead wires.





# Specialty Lighting



12v / 120v Down Lights • Hanging and Surface Continued



SL-16-LEDBRS  
(Up/Down)



SL-57-LEDP  
-RST



SL-58-LEDP  
CPR

2w or 4w LED Panel



SL-09-LED3BLT



SL-09-ALR12  
-AB-WBR



SL-10-AB  
-WTX



SL-10-BRS



SL-25-LED-BLT



SL-25-XEC-LEDCAM



SL-26-LED-BRT



SL-29-LEDBRT



SL-27-CAM

SL-25 through SL-29 available without mini j-box (FA-111-SM) for low mounting profile mounting.



SL-28-BLT



SL-52SH-LED3RBV



SL-52ST Backplate & Light Source

SL-52ST-LEDPBAR



SL-53-LEDBLT



SL-54-LEDBLT



SL-63-LEDBLT

## RX SERIES/ THE REMEDY/ FOCUS QUALITY AT A REDUCED PRICE POINT



RXS-01-LED-COP  
MR16



RXS-02-LED-COP  
MR11



RXS-03-LED-COP  
MR8



RXS-04-LED-COP  
MR16



RXS-05-LED-COP  
MR11



RXS-06-LED-COP  
MR8



RXS-07-LED-COP  
MR16



RXS-08-LED-COP  
MR11



RXS-09-LED-COP  
MR8



RXS-10-LEDP2040-WTX



RXS-11-LEDP2015-WTX



RXS-08P-LEDSS  
MR16



SL-16-P-MR16  
S2-SS  
MR16



RXS-12-LED-BRS  
MR16



RXS-13-LED-BRS  
MR11



RXS-14-LED-BRS  
MR8

# Specialty Lighting 12v/120v Putting Green Lights



50,000 HOUR LED FLAT PANEL

ARROW LED MR16/11/8 PAR36/ALR111



Catalog #	Height (H)	Width (W)	Depth (D)	Standard Material	Opt. Material	Lamp Supplied	LED Opt.	Options (pg.30)
PGL-02	27.25"	2.50"	4.50"	extruded aluminum	brass	35w T4/ DC Halogen	R/P	B C E F K L M O
PGL-03	12.50"	3.00"	4.50"	cast aluminum	brass	35w MR16 VWFL (60")	R	B C E F Q R
PGL-04	41.00"	8.25"	11.00"	extruded aluminum	—	13w Compact Fluorescent	P	B F A A
PGL04-2H20-BLT	41.00"	8.25"	11.00"	ABS post w/ alum. fixture	—	2x 20w T3 / SC Halogen	—	B F A A
PGL04-2H35-BLT	41.00"	8.25"	11.00"	ABS post w/ alum. fixture	—	2x 35w T3/ DC Halogen	—	B F A A
PGL04-2X20-BLT	41.00"	8.25"	11.00"	ABS post w/ alum. fixture	—	2x 20w T2.5/ SC Xenon	—	B F A A
PGL-05	4.75"	4.25"	4.25"	cast brass	—	20w MR16-ESX	R	F Q R B B
FA-FLAG	22.00"	4.00"	2.50"	clear acrylic flag for use with PGL-05	—	Specify number when ordering	—	—
FA-FLAG-24NF	24.00"	—	—	24" clear acrylic putting flag pole w/ knob, no flag	—	—	—	—



**NEW**  
IMPROVED .5"Ø ACRYLIC STEM ON FLAG!



PGL-02-LED3BLT PGL-03-LED-BLT PGL-04-LEDP-BLT PGL-05-LED PGL-05-BLUE PGL-05-RED PGL-05-GREEN PGL-05-YELLOW

## Residential Well Lights

12v



SL-01-LED SL-01-SP-LED SL-01-LED / FA-20 SL-01-LED / FA-14 SL-03-LED / FA-19 Grate SL-03-LED SL-03-AC-LED SL-03-EC-ACLED SL-21-LED

ARROW PAR 20/30/38

50,000 HOUR LED FLAT PANEL

ARROW LED MR16/11/8 PAR36/ALR111

## Commercial Well Lights

12v / 120v



SL-20SM-L/G-LED /-LEDM (12v) SL-20SM-L/G-LED/ (120v) SL-20MD-L/G-LED (12v) SL-20MD-L/G-LED(120v) SL-20LG-L/G (120v)

Catalog #	Height (H)	Diameter	Standard Material	Optional Material	Lamp Supplied	LED Opt.	Max	Opt(pg.22)
SL-01	8.00"	5.50"	ABS/aluminum	—	PAR36, 36w (QWFL)	—	50w	B C E F G V
SL-01-SS	8.00"	5.50"	ABS/aluminum	—	PAR36, 36w (QWFL)	—	50w	B C E F G V
SL-01-SP	8.00"	5.50"	ABS/aluminum	—	PAR36, 36w (QWFL)	—	50w	B C E F G V
SL-03	7.50"	4.50"	ABS/aluminum	brass	MR16, 20w FL (BAB)	R	35w	B C E F I Q R B B
SL-03-AC/EC-AC	7.50"	4.50"	ABS/aluminum	brass	MR16, 20w FL (BAB)	R	35w	B C E F I Q R B B
SL-20SM-L/G-MR16 (12v) <sup>2</sup>	5.25"	4.50"	bronze composite	alum.,brass	MR16 20w FL (BAB)	R	50w	E F I Q
SL-20SM-L/G-PAR20 (120v) <sup>2</sup>	5.25"	4.50"	bronze composite	alum.,brass	none	R	50w	E F I V
SL-20SM-M-MR16 (12v) <sup>2</sup>	5.25"	4.50"	aluminum	brass	MR16 20w FL (BAB)	R	50w	E F I Q R B B <b>NEW!</b>
SL-20SM-M-PAR20 (120v) <sup>2</sup>	5.25"	4.50"	aluminum	brass	none	R	50w	E F I V <b>NEW!</b>
SL-20MDL/G-PAR36 (12v) <sup>2</sup>	9.25"	7.25"	bronze composite	alum.,brass	PAR36, 36w (QWFL)	—	50w	E F I V
SL-20MD-L/G-PAR36T (120v) <sup>1,2</sup>	9.25"	7.25"	bronze composite	alum.,brass	PAR36, 36w (QWFL)	—	50w	E F I V
SL-20MD-L/G-NL (120v) <sup>2</sup>	9.25"	7.25"	bronze composite	alum.,brass	none, PAR 20,30,38	R	150w	E F I V
SL-20MD-L/G-MR16 (12v) <sup>2</sup>	9.25"	7.25"	bronze composite	alum.,brass	MR16, 20w FL (BAB)	R	75w	E F I Q R B B
SL-20MD-L/G-MR16T (120v) <sup>1,2</sup>	9.25"	7.25"	bronze composite	alum.,brass	MR16, 20w FL (BAB)	R	75w	E F I Q R B B
SL-20MD-L/GFL-13, 26 (120v) <sup>1,2</sup>	9.25"	7.25"	bronze composite	alum.,brass	13w, 2 x 13w CFL	—	26w	E F I
SL-20MD-L/G-NL-HID (120v) <sup>1,2</sup>	9.25"	7.25"	bronze composite	alum.,brass	none, PAR (HID)	R	100w	E F I V
SL-20LG-L/G-NL-HID (120v) <sup>1</sup>	15.00"	9.00"	bronze composite	alum.,brass	none, PAR (HID)	—	100w	E F I V
SL-20LG-L/G-NL-HID (120v) <sup>1</sup>	15.00"	9.00"	bronze composite	alum.,brass	none, ED17	—	100w	E F I V
SL-21	8.00"	3.00"	PVC/aluminum	—	MR16, 20w FL (BAB)	R	20w	B E F I Q R B B

Optional light bulbs for SL-01 series: #4414 (18w), VWFL (25w), or any PAR-36 lamp. Optional light bulbs for SL-03 series: any MR16 (35w max.)  
SL-20-SM (50w max.), SL-20MD (100w max.) & SL-20-LG (100w max.)  
<sup>1</sup> Fixtures are supplied with internal ballast or transformer.  
<sup>2</sup> Add -LF for flat glass lens.  
12v fixtures: 25 foot 16/2 fixture lead wire available; add -25F to catalog number. For use with Focus CPC or hub supplied by others.





# Specialty Lighting



12v / 120v Step, Brick and Surface Lights




SL-02-LED3-BAR



SL-02-AL-LED3-COP



SL-02-3L-LED3BRS

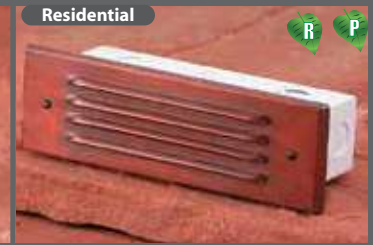

SL-04-LED3-CAR



SL-02-1L-LED3CAM

SL-04-1L-LED3WBR



SL-04-3L-LED3BRS



SL-04-AL-LED3BRS



SL-04-AL-LEDBAV w/ iridescent lens



SL-17-LED-BAV



SL-17-AL-MR16-LED-BRS



SL-17-AL-LEDBAR



SL-08-LED-BAR



SL-08-AL-LED-BRS



SL-30-LED-BRS



SL-24-BAV



SL-31-LEDBAR



SL-07-LED3BAR



SL-07SM-LEDMSS



SL-35-SM-LED3BAT



SL-35-BAR



SL-44-LEDS-RST



Available with 2w  
40,000 Hour LED STRIP  
add (-LEDS) to part #

**NEW**




SL-4444-LEDS-SS



SL-44-LEDS-RST



2w LED Strip



SL-4466-LEDS-BRT



SL-4469-LEDS-BLT

VEHICULAR PRESSURE RATING: 8800 lbs





SL-18-LED3-BRS



SL-42-SM2-LEDS-BRS  
SL-43-SM2-LEDS-BRS



SL-42-LEDS-BLT



SL-43-LEDS-BLT



SL-42LG-LEDS-BRS



New 4w Larger Model  
SL-42/-43LG-LEDS



SL-45-LEDM-RST



SL-59-COP



New Flush Step Light

SL-60-LEDM-BLT



New Flush Step Light

SL-61-LEDM-BRS



New Flush Brick Light

SL-62-LEDM-BRS

Catalog #	H	W	D	Std. Material	Opt. Mat.	LED Opt.	Lamp Supplied <sup>1</sup>	Max	Options (pg.30)
SL-02	3.00"	4.75"	2.00"	stamped alum.	brass, cop., ss	R/P	S8, 18w #1141	25w	ABCDEFGHIJKLMPS
SL-02-AL	3.00"	4.75"	2.00"	stamped alum.	brass, cop., ss	R/P	S8, 18w #1141	25w	ABCDEFGHIJKLMPS
SL-02-1L	3.00"	4.75"	2.00"	stamped alum.	brass, cop., ss	R/P	S8, 18w #1141	25w	ABCDEFGHIJKLMPS
SL-04	3.00"	9.25"	3.00"	stamped alum.	brass, cop., ss	R/P	2 x S8, 18w #1141	50w	ABCDEFGHIJKLMPS
SL-04-AL	3.00"	9.25"	3.00"	stamped alum.	brass, cop., ss	R/P	2 x S8, 18w #1141	50w	ABCDEFGHIJKLMPS
SL-04-1L	3.00"	9.25"	3.00"	stamped alum.	brass, cop., ss	R/P	2 x S8, 18w #1141	50w	ABCDEFGHIJKLMPS
SL-07	3.75" diameter	2.00"	3.00"	cast alum.	brass, ss	R/M	S8, 18w #1141	25w	ABCEGKLMPS
SL-07-SM	2.75" diameter	1.50"	3.00"	cast alum.	brass, ss	R/M	T3 5w bi-pin xenon	5w	BC <b>NEW!</b>
SL-08	3.25"	8.25"	2.75"	cast alum.	brass	R/P	2 x S8, 18w #1141	50w	CE S
SL-08-LEDP	3.25"	8.25"	.875"	cast alum.	brass	P	LED flat panel	8w	BC <b>NEW!</b>
SL-08-FL-5,7,9-120v	3.25"	8.25"	2.75"	cast alum.	brass	R/P	CFL	9w	BCEHP
SL-08-AL	3.25"	8.25"	2.75"	cast alum.	brass	R/P	2 x S8, 18w #1141	50w	ABCEGKLMPS
SL-08-AL-FL-5,7,9-120v	3.25"	8.25"	2.75"	cast alum.	brass	--	CFL	9w	BCEHP
SL-17	3.25"	5.20"	2.75"	cast alum.	brass	R/P	S8, 18w #1141	25w	ABCEKLMPS
SL-17-AL	3.25"	5.20"	2.75"	cast alum.	brass	R/P	S8, 18w #1141	25w	ABCEKLMPS
SL-17-AL-MR16	3.25"	5.20"	2.75"	cast alum.	brass	R/P	20w MR16 FL(BAB)	50w	BCEIQRBB
SL-18	2.50"	3.50"	2.25"	cast alum.	brass	R/P	S8, 18w #1141	25w	ABCEKLMPS
SL-24/-MR16	5.00" diameter	3.25"	3.00"	cast alum.	brass	R/P	S8, 18w #1141	35w	ABCEKLMQRSBB
SL-30	3.25"	5.20"	2.75"	cast alum.	brass	R/P	S8, 18w #1141	35w	ABCEKLMQRSBB
SL-31	3.25"	8.25"	3.50"	cast alum.	brass	R/P	2 x S8, 18w #1141	50w	ABCEKLMQRSBB
SL-35-COP/BRS	3.25"	2.50"	2.50"	cop./brass	--	R	S8, 18w #1141	25w	ABCEKLMPS
SL-35-SM	3.00"	2.125"	2.125"	brass	--	R	S8, 18w #1141	25w	BCDEKL
SL-42	1.00"	5.00"	3.00"	stamped alum.	brass, cop., ss	R/S	T3 10w bi-pin xenon	10w	BCDEGSY
SL-42-SM2-LEDS	.5"	5.00"	2.00"	stamped alum.	brass, cop., ss	S	LED Strip	2w	BCDG <b>NEW!</b>
SL-43-SM2-LEDS	.5"	5.00"	.75"	stamped alum.	brass, cop., ss	S	LED Strip	2w	BCDG <b>NEW!</b>
SL-42-LG-LEDS	.5"	13.00"	2.00"	stamped alum.	brass, cop., ss	S	LED Strip	4w	BCDG <b>NEW!</b>
SL-43-LG-LEDS	.5"	13.00"	.75"	stamped alum.	brass, cop., ss	S	LED Strip	4w	BCDG <b>NEW!</b>
SL-43	1.00"	5.00"	1.50"	stamped alum.	brass, cop., ss	R/S	T3 10w bi-pin xenon	10w	BCDEGSY
SL-44	3.875"	8.00"	2.25"	stamped alum.	brass, cop., ss	R/S	T3 10w bi-pin xenon	10w	BCDEGY
SL-44-44	4.00"	4.00"	2.25"	stamped alum.	brass, cop., ss	R/S	T3 10w bi-pin xenon	10w	BCDGEY <b>NEW!</b>
SL-44-66	6.00"	6.00"	2.25"	stamped alum.	brass, cop., ss	R/S	T3 10w bi-pin xenon	10w	BCDGEY
SL-44-69	6.00"	9.00"	2.25"	stamped alum.	brass, cop., ss	R/S	T3 10w bi-pin xenon	10w	BCDGEY
SL-45-XBP10	4.75"	2.00"	1.00"	extruded alum.	brass	R/M	T3 10w bi-pin xenon	10w	BCD G K
SL-50-LEDP	2.00"	7.25"	1.00"	cast alum.	brass	P	LED flat panel	5w	BC <b>NEW!</b>
SL-59	3.625"	3.50"	2.00"	copper.	brass	--	20w bi-pin halogen	20w	BC <b>NEW!</b>
SL-60	3.00"	5.00"	1.50"	aluminum	brass, ss	--	3w LED module	3w	BC <b>NEW!</b>
SL-61	3.00"	4.875"	1.50"	aluminum	brass, ss	--	3w LED module	3w	BC <b>NEW!</b>
SL-62	3.00"	8.25"	1.50"	aluminum	brass, ss	--	2x 3w LED module	3w	BC <b>NEW!</b>

For 120v T7, T8 or T10, consult factory for price and availability. Specify wattage at time of order for CFL. For 3 lower models add -3L to catalog number; applies to SL-02 and SL-04 models

Model shown:  
SL-42-LGLEDS-BRT



Model shown:  
SL-44-LEDS-BAR  
SL-42-SM-LEDS-BAR





**NEW**

# Step/ Brick Lighting Flat Panel LED's

No Back Box • Residential Grade Stamped



12v

50,000 HOUR LED FLAT PANEL



SL-02-LEDPBRS



SL-02-ALLEDPWBR



SL-02-1LLEDPBLT



SL-04-LEDPWBR



SL-04-ALLEDPCOP



SL-04-1LLEDPBRs

### SL-02-LEDP Series

- 4.75" (W) x 3.00" (H) x .75" (D)
- 4w 12v DC integrated flat panel LED
- 350 Lumens / 380 Lumens 5200K\*
- 3000K Warm White or 5200K Cool White
- Remote Driver Supplied
- 50,000 Hour LED Panel / 5 Year Warranty

**ONLY .75" DEEP**



### SL-04-LEDP Series

- 9.25" (W) x 3.25" (H) x .75" (D)
- 8w 12v DC integrated flat panel LED
- 630 Lumens / 680 Lumens 5200K\*
- 3000K Warm White or 5200K Cool White
- Remote Driver Supplied
- 50,000 Hour LED Panel / 5 Year Warranty

**FOCUS LED PANELS ARE UL 8750 LISTED**  
Rated for Indoor & Outdoor Applications

\* For 5200K add -52 to catalog # eg: SL-04-LEDP52-RST

**NEW**

# Step/ Brick Lighting Flat Panel LED's

No Back Box • Commercial Grade Cast



12v

50,000 HOUR LED FLAT PANEL



### SL-50-LEDP Series

- 7.25" (W) x 2" (H) x 1.125" (D)
- 5w 12v DC integrated flat panel LED
- 350 Lumens / 380 Lumens 5200K\*
- 3000K Warm White or 5200K Cool White
- Remote Driver Supplied
- 50,000 Hour LED Panel / 5 Year Warranty

**ONLY 1.125" DEEP**



### SL-08-LEDP Series

- 8.25" (W) x 3.25" (H) x .875" (D)
- 8w 12v DC integrated flat panel LED
- 630 Lumens / 680 Lumens 5200K\*
- 3000K Warm White or 5200K Cool White
- Remote Driver Supplied
- 50,000 Hour LED Panel / 5 Year Warranty

**ONLY .875" DEEP**



**LED Flat Panels**  
50,000 Hours  
5 Year Warranty  
3000k or 5200k



4w LED Panel



5w LED Panel



8w LED Panel

\* For 5200K add -52 to catalog # eg: SL-04-LEDP52-RST

## NOW AVAILABLE ON THESE COMMERCIAL GRADE CAST FIXTURES



SL-17-LEDPBLT



SL-17AL-LEDPWBR



SL-30-LEDPBAR



SL-31-LEDPBRT

# Stake/Deck Lighting 12v



12v Copper Recessed Deck / Patio Cover / Fence Lights



Catalog #	Height (H)	Diameter	Material	Lamp Supplied <sup>1</sup>	Options (pg.30)
SL-36-MR8/AC	7.00"	1.25"	copper	20w MR8 (FL)	E F I AA (angle collar is 2.25" long)
SL-36-MR11/AC	7.50"	1.75"	copper	20w MR11 (FTD)	E F I X (angle collar is 3.0" long)
SL-36-MR16/AC	7.50"	2.25"	copper	20w MR16 (BAB)	E F I Q R BB (angle collar is 3.0" long)
SL-37-MR8	3.25"	2.00"	copper	20w MR8 (FL)	E F I AA
SL-37-MR11	3.25"	2.50"	copper	20w MR11 (FTD)	E F I X
SL-37-MR16	3.75"	3.00"	copper	20w MR16 (BAB)	E F I Q R BB
SL-37P-LEDBRS	2.00"	2.00"	brass	2w LED	F I

Models shown:  
SL-37-MR8 SL-37-MR11  
SL-37-MR16

## CIRCULAR PAVER LIGHT

**NEW**



Can be used for up-lighting or down-lighting

<sup>1</sup>12v fixtures: 25 foot 16/2 fixture lead wire available; add -25F to catalog number. For use with Focus CPC or hub supplied by others.

### 12v Copper Stake Lights

SL-37P-LEDBRS

SL-37-MR8LED-CAR

SL-37-MR11LED-CAR

SL-37-MR16-CAR

SL-37-MR16LED-CAR




Model shown:  
SL-36-MR16LED-AC

SL-36-MR8LED SL-36-MR8LED-AC SL-36-MR11LED SL-36-MR11LED-AC SL-36-MR16LED SL-36-MR16LED-AC SL-36-MR16LED-CAR

# WALL SCONCES

Custom designs available; Consult factory

50,000 HOUR  
LED FLAT PANEL

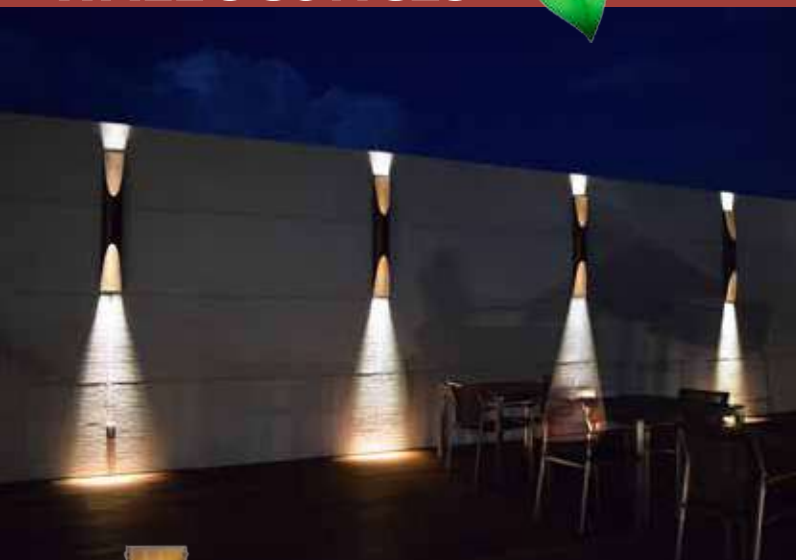

### Plasma Cut

### Vinyl Print



Vinyl Sconces with  
Plasma Cut Frames  
Vinyl is Fade Resistant

Small..... 6.25" x 7"  
Medium..... 7.25" x 10"  
Large ..... 8.25" x 12"  
XLarge..... 9.25" x 16"  
Brass or Aluminum





# Underwater Lights<sup>12v</sup>



ARROW LED  
MR16/11/8  
PAR36/ALR111

50,000 HOUR  
LED MODULE



Catalog #	Height (H)	Diameter	Material	Lamp Supplied	Options (pg.31)
SL-11-LEDM715	2.00"	3.75" diameter	cast brass	15", 7w LED Module	E F <b>NEW!</b>
SL-11-LEDM740	2.00"	3.75" diameter	cast brass	40", 7w LED Module	E F <b>NEW!</b>
SL-11-LEDM760	2.00"	3.75" diameter	cast brass	60", 7w LED Module	E F <b>NEW!</b>
SL-11-LEDM7WF	2.00"	3.75" diameter	cast brass	160" 11w LED Module	E F <b>NEW!</b>
SL-11-LEDM1115	2.00"	3.75" diameter	cast brass	15", 11w LED Module	E F <b>NEW!</b>
SL-11-LEDM1540	2.00"	3.75" diameter	cast brass	40", 11w LED Module	E F <b>NEW!</b>
SL-11-LEDM1560	2.00"	3.75" diameter	cast brass	60", 11w LED Module	E F <b>NEW!</b>
SL-11-LEDM15WF	2.00"	3.75" diameter	cast brass	160", 11w LED Module	E F <b>NEW!</b>
SL-11-LEDM1515	2.00"	3.75" diameter	cast brass	15", 15w LED Module	E F <b>NEW!</b>
SL-11-LEDM1540	2.00"	3.75" diameter	cast brass	40", 15w LED Module	E F <b>NEW!</b>
SL-11-LEDM1560	2.00"	3.75" diameter	cast brass	60", 15w LED Module	E F <b>NEW!</b>
SL-11-LEDM15WF	2.00"	3.75" diameter	cast brass	160" 15w LED Module	E F <b>NEW!</b>
SL-11	3.50"	5.75" diameter	cast brass	25w PAR36 VWFL	E F
SL-11-AB	4.20"	5.75" diameter	cast brass	25w PAR36 VWFL	E F
SL-11-LED	3.50"	5.75" diameter	cast brass	PAR36 LED	E F
SL-40-ULT	3.25"	2.50" diameter	cast brass	10K 20w MR11 FL (FTD)	E F
SL-40-AB-ULT	3.25"	2.50" diameter	cast brass	10K 20w MR11 FL (FTD)	E F
SL-40-AB-AC-ULT	4.50"	2.50" diameter	cast brass	10K 20w MR11 FL (FTD)	E F
SL-40-AC-ULT	4.50"	2.50" diameter	cast brass	10K 20w MR11 FL (FTD)	E F
SL-40-SM-AC-ULT	4.50"	2.50" diameter	cast brass	10K 20w MR11 FL (FTD)	E F
SL-40-SM-ULT	3.25"	2.50" diameter	cast brass	10K 20w MR11 FL (FTD)	E F
SL-33-ULT	3.50"	3.38" diameter	cast brass	10K 20w MR16 FL (BAB)	E F Q R BB
SL-33-AB-ULT	3.50"	3.38" diameter	cast brass	10K 20w MR16 FL (BAB)	E F Q R BB
SL-33-AB-AC-ULT	5.38"	3.38" diameter	cast brass	10K 20w MR16 FL (BAB)	E F Q R BB
SL-33-AC-ULT	5.38"	3.38" diameter	cast brass	10K 20w MR16 FL (BAB)	E F Q R BB
SL-33-SM-AC-ULT <sup>1</sup>	5.38"	3.38" diameter	cast brass	10K 20w MR16 FL (BAB)	E F Q R BB
SL-33-SM-ULT <sup>1</sup>	3.50"	3.38" diameter	cast brass	10K 20w MR16 FL (BAB)	E F Q R BB
SL-51-ST	4.00"	7.00" diameter	cast brass	10K 20w MR16 FL (BAB)	E Q R BB
*FA-H2O-JB	3.00"	5.00" width	cast brass	N/A	



Model shown:  
SL-11-LEDM-BRS

Underwater fixtures available with black acid treatment. Add -BAT to catalog number. Underwater fixtures available with brass acid rust treatment. Add -BAR to catalog number.

\* Specify number of ports (8 fixtures max.) at time of order plus 1 feed for 12/2 lead wire. eg: 4H=3 fixture ports + 1 lead wire port.

For aiming bracket add -AB to catalog number. For side mount add -SM to catalog number. For angle collar add -AC to catalog number. <sup>1</sup> 6w Arrow LED side mount only

**NEW**

FA-35 Series plastic filters: blue, red, green, amber, white for SL-11



FA-35-LEDM Series plastic filters: blue, red, green, amber, white for SL-11-LEDM



SL-11



SL-11-AB



SL-11-LED

**NEW**



SL-11-LEDM

**NEW**



SL-11-AB-LEDM

**NEW**



SL-11-ABAC-LEDM



New SL-11-ABAC-LEDM  
50,000 hour LED module

AVAILABLE WITH  
MR11 50,000 HOUR LED OPTION

FA-11 Glass Color Filters Available for SL-33 & SL-40 Series



SL-40 & SL-33 SERIES  
20w 10,000 Hours  
**STANDARD**



SL-40-AB-AC-LED-BAR



SL-40-AB-LED



SL-40-SM-AC-LED



SL-40-AC-LED



SL-40-SM-LED



SL-40-LED

SL-51-ST-LEDBAT



SL-51-ST-LEDBAT



SL-33-AC-LED  
SL-33-AB-AC-LEDBAT

SL-33-SM-AC-LED  
SL-33-AB-LEDBAR

SL-33-SM-LED  
SL-33-LED



HOUSE CONNECTIONS FOR UP TO EIGHT 12v UNDERWATER FIXTURES!



For 25/50/75/100 ft of 12v 12/2c supply cable  
add -25F/-50F/-75F/-100F to cat #  
Specify number of ports (8 fixtures max.) at time of order plus 1 feed for 12/2 lead wire.  
eg: 4H=3 fixture ports + 1 lead wire port.

Underwater Junction Box  
FA-H2O-JB



# Barbecue Lights



**NEW**



Model shown:  
BQ-15CD14-LED-SS

## 12v /120v Flex Clamp/Flex Deck/Quick Connect Series

Catalog #	Arm Length <sup>1</sup>	Diameter	Std. Mat.	Opt. Mat.	Lamp Supplied	LED Opt.	Options (pg.30)
BQ-03-FD <sup>1</sup> /-QC	24" std.	4.50"	stainless steel	brass, cop.,	20w T4/SC	R	B C D E G M S
BQ-07-FD <sup>1</sup> /-QC	24" std.	4.50"	stainless steel	brass, cop.,	20w T4/SC	R/P	B C D E F G I M S
BQ-08-FC <sup>1</sup> /-FD <sup>1</sup> /-QC/-WB	27" std.	2.60"	stainless steel	brass, cop.,	35w MR16 FL(BAB)	R	B C D E F G I Q R B B
BQ-RX08-FD/-CD/-WB	27" std.	2.50"	stainless steel	brass, cop.,	35w MR16 FL(BAB)	R	B C D E F G I Q R B B
BQ-09-FD <sup>1</sup> /-QC	27" std.	1.50"	stainless steel	brass, cop.,	20w MR11 FL(FTD)	R	B C D E F I X
BQ-14-FD	27" std.	2.60"	stainless steel	—	35w MR16 FL(BAB)	R	B C D E F G I Q R B B
BQ-15-CD08/CD14	24" std.	2.60"	stainless steel	—	35w MR16 FL(BAB)	R	B C D E F G I Q R B B
BQ-16-FD	27" std.	2.60"	stainless steel	—	35w MR16 FL(BAB)	R	B C D E F G I Q R B B
<b>Umbrella/Flag Lights</b>	<b>Height</b>	<b>Diameter</b>	<b>Std. Mat.</b>	<b>Opt. Mat.</b>	<b>Lamp Supplied</b>		<b>Options (pg.30)</b>
UL-03	3.50"	2.50"	alum.	brass, cop.	3x10w MR8 FL	R	B C E F I Z
FA-PM-27H	2.00"	7.00"	alum.	brass	N/A		

Note:<sup>1</sup>For 36" flex arms, add -36" to catalog number. Note: FC= Flex Clamp. Supplied with plug and cord.  
36" Flex arm not available on -WB & -QC models.



BQ-03-FD-LED3-SS    BQ-07-FDLEDP-SS    BQ-08-FC-LED-SS    **#1 Selling Model BQ-08FD-120V-SS**    BQ-09-FD-LED-SS



BQ-14-FD LED-SS    BQ-15-CD08 LED-SS    BQ-15-CD14 LED-SS    BQ-RX08 LED-SS    BQ-16-FD LED-SS

**Quick Connect**



Quick Connect BQ Lamps Are Now available with On/Off Switch. Add -QCS into catalog #

**NEW QUICK CONNECT SYSTEM ALLOWS PLUG N' PLAY EASE OF USE**



BQ-03-QC(S)-SS    BQ-07-QC(S)-SS    BQ-08-QC(S)-SS    BQ-09-QC(S)-SS  
FA-BQ-SP receptacle allows one fixture to be used in multiple application areas (reading, dining etc)

**Portable**



BQ-08-WB-SS    BQ-RX08-SS



New Easy Mount System 120v

### Barbecue / Umbrella Power Supplies

12v /120v



75w Hardwire Transformer  
HW-12-75



75w Plug-in Transformer  
PI-12-75



12v Battery  
Battery Charger  
Must buy as a set at time of order  
WM-Charger    WB-12-BBQ

## Umbrella & Flag Pole Lighting

**NEW**



Use with virtually all Focus directional bullets (sold separately)

FA-PM-72HCPR

NOW WITH OPTIONAL MR8 LED    UL-03-LED-COP





## RXT CONTROL OPTIONS



Astro Timer (-RXTAT)



Digital Timer (-RXTDT)



Mechanical Timer (-RXTT)



Astro Timer (-AT)



Digital Timer (-DT) & Photo Cell (-RXTPC)



Timer Ready (Standard)

**New Deeper Case Accommodates Most Popular Brands Of Plug-In Timers**

LED's draw less wattage so you can save money by using smaller, lower wattage transformers.

Power requirement comparison  
**LED vs Traditional Halogen**

LED	=	TRADITIONAL
60w	=	300w
120w	=	600w
180w	=	900w

**GO GREEN**



Mechanical Timer (-T) & Remote Photo Cell (-RXTRPC)

Interchangeable faceplates with 3 selections of timers can be installed at factory, distribution level or in the field.

Simple installation with only a Phillips screwdriver - no special tools required.

### MATERIAL/FEATURES


- 60, 120, 180, 300 and 600 watt output models available
- UL 1838 listed, the standard for low voltage landscape lighting systems
- Multi Voltage output (12.5, 13.5 & 14.5 Volts)
- Super Terminal Lugs with capacity of 3 x #8, 5 x #10 or 7 x #12 gauge wire
- 304 Stainless Steel enclosure with #4 brushed finish
- Removable Stainless Steel hinged door is lockable and weather sealed
- Above grade, NEMA 3R rated, rain tight enclosure
- LED indicators for instant recognition of 120v and 12v power
- Timer Ready standard (for plug in timers supplied by others)
- Optional Mechanical Timer (-T), Digital Timer (-DT) and Astro Timer (-AT) face plates can be factory or field installed
- Photocell Ready with quick connector
- Supplied with two 1/2" conduit (trade size) holes & one 1-1/2" inlet with plugs in bottom panel plus 2 side panel 1/2" conduit (trade size) holes with plugs
- Flip down bottom panel swings down for easy access wiring
- 11 gauge cold rolled steel 'L' brackets for stable mounting
- Mounting plate and hardware included

### FINISH

- Brushed Stainless Steel

### ELECTRICAL

- Long life, high temperature 266°F (130°C) class 'B' rated transformer core
- Copper shielded isolation/insulation; No contact between 120v and 12v windings
- 1500v Isolation between all windings and ground
- Grade M19 electric grade steel for superior electrical and magnetic properties
- Strip copper secondary windings for lower temperature rise
- Single phase, open core and coil
- E.L. laminated core has concentric winding and is protected by 130°C thermal switch.
- Vacuumed impregnated with black slate flour
- Filled varnish for superior heat dissipation and noise reduction - Class 180°C
- 120v primary, 12.5v secondary 50/60 Hertz/cycle (standard)
- 6 foot 18/3 SJT-WA weatherproof grounded power cord (120v)
- ON/OFF control via rocker switch
- Extra heavy duty (80 amp) terminal lugs
- Resettable circuit breaker for overload and short circuit protection

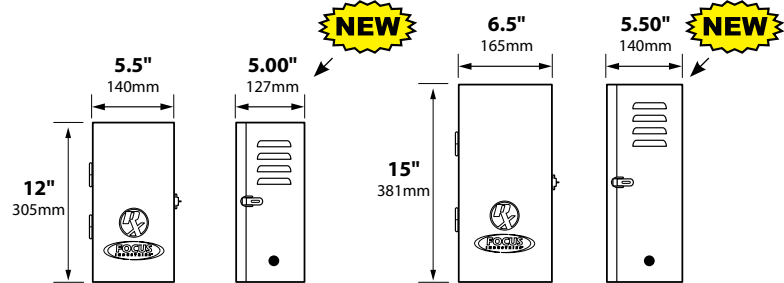

**RXT-12-60MV**  
**RXT-12-120MV**  
**RXT-12-180MV**

**RXT-12-300MV**  
**RXT-12-600MV**

### CONTROL OPTIONS

- T Mechanical Timer
- AT Astronomical Timer
- RXTRPC Remote Photocell
- DT Digital Timer
- RXTPC Photocell

CATALOG NO.	DESCRIPTION	CIRCUITS
RXT-12-60MV	60 watt MV transformer, timer ready	1
RXT-12-120MV	120 watt MV transformer, timer ready	1
RXT-12-180MV	180 watt MV transformer, timer ready	1
RXT-12-300MV	300 watt MV transformer, timer ready	1
RXT-12-600MV	600 watt MV transformer, timer ready	2
RXT-12-60MVAT	60 watt MV transformer, astro timer	1
RXT-12-120MVAT	120 watt MV transformer, astro timer	1
RXT-12-180MVAT	180 watt MV transformer, astro timer	1
RXT-12-300MVAT	300 watt MV transformer, astro timer	1
RXT-12-600MVAT	600 watt MV transformer, astro timer	2
RXT-12-60MVDT	60 watt MV transformer, digital timer	1
RXT-12-120MVDT	120 watt MV transformer, digital timer	1
RXT-12-180MVDT	180 watt MV transformer, digital timer	1
RXT-12-300MVDT	300 watt MV transformer, digital timer	1
RXT-12-600MVDT	600 watt MV transformer, digital timer	2
RXT-12-60MVT	60 watt MV transformer, mechanical timer	1
RXT-12-120MVT	120 watt MV transformer, mechanical timer	1
RXT-12-180MVT	180 watt MV transformer, mechanical timer	1
RXT-12-300MVT	300 watt MV transformer, mechanical timer	1
RXT-12-600MVT	600 watt MV transformer, mechanical timer	2

# Power Supplies

120v

WT Series Aluminum Transformers

Nema 3R • UL 1838/1598



1 CIRCUIT	2 CIRCUITS	3 CIRCUITS	4 CIRCUITS
WT-12-60/-MV	WT-212-200	WT-312-900	WT-412-1200
WT-12-100	WT-212-300	(3 x 300w)	(4 x 300w)
WT-12-200	WT-212-600		
WT-12-300			

**RECOMMENDED FOR LED**



WT-212-300-R

WT-12-100/200

WT-12-100-PC

## FEATURES

- Rocker switch on/off control
- Extra heavy-duty terminal block easily handles extra sets of cable
- Heavy-duty extruded aluminum housing (.115") with slide locking cover
- Easily programmable 3L
- Quality circuit protection through circuit breaker; mini push-to-reset
- Long-life, high temperature (130°C) rated transformers
- Isolation-type transformers. No contact between 120v and 12v windings
- Single-phase, open core and coil transformers, 120v primary, 12.5v secondary, 60 Hz
- Available in 100w, 200w, 300w, 600w, 900w and 1200w
- 1, 2, 3 or 4 circuit output
- 6-foot weather-resistant grounded flat power cord
- Attractive, durable, black semi-gloss powder coat finish
- Full range dimmer and dusk-to-dawn photocell options
- Remote photocell or remote motion sensor with 15' cord (up to 50') and mounting hub (FA-111)
- Built-in 24v VAC relay unit to be controlled by irrigation time clock (12v available)
- Made in the U.S.A.
- For other input voltages 220v, 240v, and 277v consult factory.

## OPTIONS

- Integral timer ..... (-T)
- Astro timer ..... (-AT) **NEW!**
- Digital timer ..... (-DT)
- Attached photocell ..... (-PC)
- Remote photocell 15' cord ..... (-RPC)
- Full phase dimmer (draws 1v) ..... (-D)
- 24v VAC relay to irrigation controller... (-R) (12v relay also available)
- Remote motion sensor ..... (-RMS)
- Multi-voltage output (300w increments only) 12.5v, 13.5v, 14.5v ..... (-MV)
- Timer-ready or X10-ready ..... (-TR)



## M Series Stainless Steel Transformers UL 1838/1598



Digital Timer Available, add (-DT)

Knock-out plate for conduit feed for all timer units

WT-212-300-RPC-T-D-CAM

WT-412-1200-4T

**Removable Door**

**Site Information Log**

**ASTRO-TIMER AVAILABLE (add-AT)**

**Digital Timer**

**Photocell Ready Quick Connector**

**Removable Bottom**

**Flat plug**

**LED indicators for 120v power on and 12v power to terminal**

Model shown: MST-212-600-DT  
5" D x 16" H x 6" W

**NEW GRAY SUPER LUGS**

**LUG CAPACITY**  
3 x #8  
5 x #10  
7 x #12

## MST Series

## MLT Series

MST/MAS-12-200	MLT-312-900/-MV
MST/MAS-12-300/-MV	MLT-412-1200/-MV
MST/MAS-2-12-200	
MST/MAS-2-12-300	
MST/MAS-212-600/-MV	

Stainless steel enclosure with removable hinged locking door

## FACTORY INSTALLED OPTIONS:

- Integral Timer ..... (-T)
- Astro Timer ..... (-AT)
- Digital timer ..... (-DT)
- Attached photocell ..... (-PC)
- Remote photocell 15' cord ..... (-RPC)
- Full phase dimmer (draws 1v) ..... (-D)
- 24v VAC relay to irrigation controller ..... (-R)
- Multi-voltage output (12.5v, 13.5v, 14.5v taps) ..... (-MV)
- Timer-ready or X10-ready ..... (-TR)



Model shown: MLT-412-1200-2DT-RPC  
5" D x 16" H x 12" W

Both series are available in timer-ready or X10-ready. Both enclosures available in aluminum. Add -MAS/-MAL into catalog # (outer enclosure powder coated semi-gloss black) Optional powder coat finishes are available. See page 19.

## Direct Burial Composite Transformers Nema 6 • UL 1598/1838

**DB-12-75E/150E/LED10/60LED** 4.5" x 5.5"; max. load: 25w/75w/150w, 10w driver or 60w LED transformer

**DBS-12-25M/75E/100M/150E/2-LED10**: 6" x 6" x 6"; max. load: 25w/60M/75w/100w/150w

**DB-12-60M/75E/100/2-8D**: 7.25" x 8.75"; max. load: 60w/75w/100w

**DB-12-200/300**: 10" x 10" x 7.75"; max. load: 200w/300w

**DB-212-600/312-900/412-1200**: 13" x 13" x 8.25"; max. load: 2 x 300w for 600w; 3x 300w for 900w; 4x 300w for 1200w

- Bronze composite housing
- 1/2" & 3/4" hubs, 120v input
- 2 ft. of 12/2 DB cable for outputs (12.5v connection)
- 2-3, 1/2" NPS hubs top mount available for fixture or photocell. Add (-PC) for photocell
- Magnetic circuit breaker for secondary overload /short circuit protection
- 60w units available in multi-voltage (12.5v, 13.5v, 14.5v)

**NEW**

Multi-Fixture Power Supply HW-12-60LED\*

**NEW**

D = DRIVER  
M = MAGNETIC  
E = ELECTRONIC

**RECOMMENDED FOR LED**



**MUST BE INSTALLED BY A LICENSED ELECTRICIAN PER LOCAL CODES!**



DB-12-75E/  
150E/LED10/60LED



DB-12-60M/75E/  
100M/150E/100-PC/2-LED10



DBS-12-25M/60M/75E  
/100M/150E/2-LED10



DB-12-120M/200/300/  
212-300



# Power Supplies

## Two New Mini DB's

**NEW**



**GREAT FOR LEDS**



Composite Cap

DB-12-LED60/DB-12-75E  
DB-12-150E/DB-12-LED10/LED60  
DBR-55-JB (Junction Box)  
Add-BRS For Brass Cap



Brass Cap



DBS-12-25M /DBS-12-60M/DBS-12-100M  
DBS-12-75E/DBS-12-150E/DBS-12-LED8  
DBR-55-JB (Junction Box)



**NEW**

DB-12-LED60BAR

### Field Installed Kits-MST/MLT Control Devices

1. Integral timer kit .....(-T KIT)
2. Digital timer kit .....(-DT KIT)
3. Photocell kit .....(-PC KIT)
4. Remote photocell kit .....(-RPC KIT)
5. Full phase dimmer kit .....(-D KIT)
6. 12v or 24v VAC relay kit for control via irrigation time clock .....(-R KIT)



Mechanical



Digital



Photo Cell



Remote Photo Cell



Full Phase Dimmer

**NOTE: DRAWS 1 VOLT**



Irrigation Controller Relay

### H.I.D. Ballast Enclosures



#### Metal Halide • High Pressure Sodium

PAR38; Metal Halide - 70w R40 or PAR38, 100w PAR 38, 175w R40 or PAR38, 35w 39w or 50w PAR20, 20w, 39w or 70w PAR30, 70w, 100w or 150w PAR38

HPS: ED17- (35w-150w HPS)

**WT-120-MH/HPS:**

5" W x 10" H Weatherproof ballast enclosure (above grade)

**DB-120-MH/HPS:**

10" W x 10" H x 7.75" D Direct burial ballast enclosure

Single above grade NEMA 3R



Single below grade NEMA 12



\* Dual ballast available. Consult factory, enclosure is larger.



Model shown: RXT-12-60MV

WT-120-MH/HPS

DB-120-MH/HPS

Plug-In

### Retrofit Transformers

Hardwire

Max. load: 75w; molded thermal plastic. Overload protection/ dimmable 120v input/11.5v output. 10' run max.

**DO NOT USE WITH LED**

2.75" H x 1.75" W x 1" D

2.125" H x 1.25" W x .75" D

PL-12-75

HW-12-75/-150

#### OPTIONS FOR DIRECT BURIAL TRANSFORMERS

- Attached photocell .....(-PC)
- Remote photocell 19' cord .....(-RPC)
- 24v VAC relay to irrigation controller.....(-R)
- Multi-voltage output (300w increments only) ..... (12.5v, 13.5v, or 14.5v)-MV)
- Multi-voltage input (options: 277v 60hz or 220v/240v 80hz 300VA only) .....consult factory



DB-212-600/312-900/412-1200



120v  
FA-JBOX-BRS  
In-Ground  
Die Cast  
Brass  
Junction Box



FA-JBOX-BRS

120v  
receptacle

FA-JBOX shown with AL-17-LEDPBR5

# LED RETROFIT APPLICATIONS


## Remote Drivers



Number	Description	Hours	Lumens	
<b>LED Panel Kits For Focus 120v Flood Lights</b>				
FA-LE-DP8120FFL05	Reflector assembly with 8w LEDP for FFL-05/FFL-07 - 120v	50K	630	
FA-LE-DP8120FFL13	Reflector assembly with 8w LEDP for FFL-13/FFL-26/FFL-09 - 120v	50K	630	
3000K Warm White Standard for 5200K Cool White add <b>-52</b> to part number				
<b>LED Panels Universal Kits for Step and Brick Lights 12v/120v/277v</b>				
FA-LE-DP512B	Brick light reflector assembly w/ 5w LED Panel, 12v driver	50K	350	
FA-LE-DP5120B	Brick light reflector assembly w/ 5w LED Panel, 120v driver	50K	350	
FA-LE-DP5277B	Brick light reflector assembly w/ 5w LED Panel, 277v driver	50K	350	
3000K Warm White Standard for 5200K Cool White add <b>-52</b> to part number				
FA-LE-DP812B	Brick light reflector assembly w/ 8w LED Panel, 12v driver	50K	630	
FA-LE-DP8120B	Brick light reflector assembly w/ 8w LED Panel, 120v driver	50K	630	
FA-LE-DP8277B	Brick light reflector assembly w/ 8w LED Panel, 12v driver	50K	630	
3000K Warm White Standard for 5200K Cool White add <b>-52</b> to part number				
FA-LE-DP412S	Step light reflector assembly w/ 4w LED Panel, 12v driver	50K	350	
FA-LE-DP4120S	Step light reflector assembly w/ 4w LED Panel, 120v driver	50K	350	
FA-LE-DP4277S	Step light reflector assembly w/ 4w LED Panel, 277v driver	50K	350	
3000K Warm White Standard for 5200K Cool White add <b>-52</b> to part number				
<b>LED Panels with Heat Sink Only 12v/120v/240Vv/277v</b>				
FL-LE-DP5W35001	5w LED Panel with aluminum heat sink, driver not included	50K	350	
Driver Options:				
HW-12-5350-12-LED	12v LED driver			
HW-12-6350-120-LED	120v LED driver			
HW-12-6350-277-LED	277v LED driver			
HW-12-20MVLED	120v-277v driver for <b>multiple</b> panels			
3000K Warm White Standard for 5200K Cool White add <b>-52</b> to part number				
FL-LE-DP8W70001	8w LED Panel with aluminum heat sink, driver not included	50K	630	
Driver Options:				
HW-12-10700-12-LED	12v LED driver			
HW-12-10700-120-LED	120v LED driver			
HW-12-20MVLED	120v-277v driver for <b>multiple</b> panels			
3000K Warm White Standard for 5200K Cool White add <b>-52</b> to part number				
FL-LE-DP8W70002	8w LED Panel with aluminum heat sink, driver not included	50K	630	
Driver Options:				
HW-12-10700-12-LED	12v LED driver			
HW-12-10700-120-LED	120v LED driver			
HW-12-20MVLED	120v-277v driver for <b>multiple</b> panels			
3000K Warm White Standard for 5200K Cool White add <b>-52</b> to part number				
FL-LE-DP12W	12w LED Panel with aluminum heat sink, driver not included	50K	1080	
Driver Options:				
HW-12-121000-12-LED	12v LED driver			
HW-12-20MVLED	120v-277v driver for <b>multiple</b> panels			
3000K Warm White Standard for 5200K Cool White add <b>-52</b> to part number				
FL-LE-DP4W35001	4w LED Rectangle Panel with aluminum heat sink, driver not included	50K	350	
FL-LE-DP4W35002	4w LED Circular Panel with aluminum heat sink, driver not included	50K	300	
Driver Options:				
HW-12-5350-12-LED	12v LED driver			
HW-12-6350-120-LED	120v LED driver			
HW-12-6350-277-LED	277v LED driver			
HW-12-20MVLED	120v-277v driver for <b>multiple</b> panels			
3000K Warm White Standard for 5200K Cool White add <b>-52</b> to part number				
FL-LE-DP2W35002	2w LED Circular Panel with aluminum heat sink, driver not included	50K	150	
Driver Options:				
HW-12-2165-12-LED	12v LED driver			
3000K Warm White Standard for 5200K Cool White add <b>-52</b> to part number				

### DRIVERS


- A) HW-12-20700-277-LED (277v driver for 8w panels)
- B) HW-12-6350-120-LED (120v driver for 4w & 5w panels)
- C) HW-12-10700-120-LED (120v driver for 8w panels)
- D) HW-12-5350-12-LED (12v driver for 4w & 5w panels)
- E) HW-12-10700-12-LED (12v driver for 8w panels)
- F) HW-12-12100-12-LED (12v driver for 12w panel)
- G) HW-12-6350-277-LED (277v drivers for 4w & 5w panels)
- H) HW-12-20MVLED (120v/277v multi panel driver eg: 2x 8w or 4x 5w panels etc)

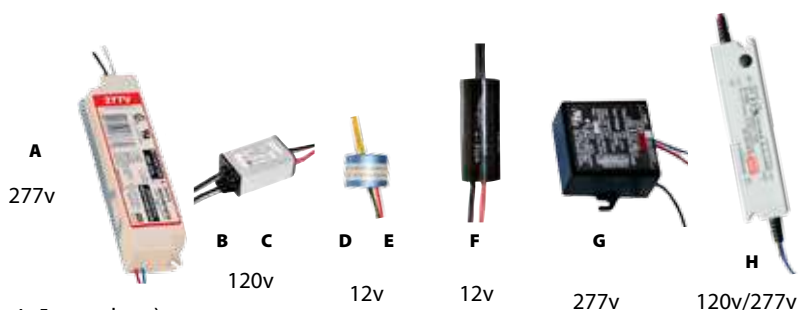



# LED RETROFIT APPLICATIONS

## 120v Driver On Board

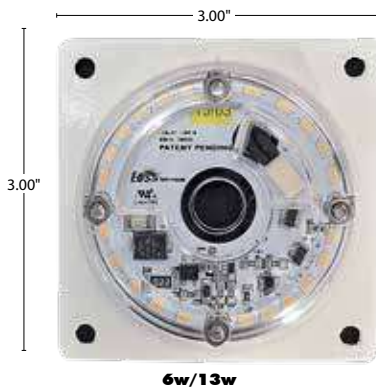

**6w/13w**



**14w/23w**



**120v Driver On-Board  
277v On Select Models**

- Voltage: 120v or 277v models
- Total Watts: 6, 13, 14 or 23
- Lumens: 500 lumens (6w) 900 (13w) 1350 (14w) 1850 (23w)
- High power factor >0.98
- CCT: 3000K (optional 4000K available @ 550 lumens)
- CRI: 80
- Estimated Life: 50,000 hours (L70)
- Cool Beam, No UV or IR
- Dimmable down to 5% with most triac or electronic dimmers
- On board line surge protection
- 5 Year Limited Warranty
- Remote Phosphor LED technology
- Integrated LED Driver on board (120v input only)
- Polycarbonate protective optical lens
- Multiple mounting options with custom mounting plates for any size fixture
- Magnetic mounting option - no tools required

### LED Module Compliance & Certification

- UL8750 Recognized Component
- RoHS Compliant - Energy Efficient - Environmentally Friendly
- LM79: No (LM79 does not apply to COB technology)
- FCC Compliance Class B



**Magnetic Mounting Studs  
Fast Installation**



**Perfect for Wall & Ceiling Applications**



CATALOG NO.	DESCRIPTION
<b>6w 120v Input*</b>	
RFL-M1-06-R-30-120	6W RETROFIT LED MODULE, 500 LUMEN, 3000K, 120V INPUT
RFL-M1-06-R-40-120	6W RETROFIT LED MODULE, 550 LUMEN, 4000K, 120V INPUT
RFL-M1-06-R-30-120-33A*	6W RETROFIT LED MODULE, 500 LUMEN, 3000K, 120V INPUT, 3" X 3" MOUNTING PLATE
RFL-M1-06-R-40-120-33A*	6W RETROFIT LED MODULE, 550 LUMEN, 4000K, 120V INPUT, 3" X 3" MOUNTING PLATE
RFL-M1-06-R-30-120-33AM	6W RETROFIT LED MODULE, 500 LUMEN, 3000K, 120V INPUT, 3" X 3" MAGNETIC MOUNTING PLATE
RFL-M1-06-R-40-120-33AM	6W RETROFIT LED MODULE, 550 LUMEN, 4000K, 120V INPUT, 3" X 3" MAGNETIC MOUNTING PLATE
RFL-M1-06-R-30-277-33AM	6W RETROFIT LED MODULE, 500 LUMEN, 3000K, 277V INPUT, 3" X 3" MAGNETIC MOUNTING PLATE
RFL-M1-06-R-40-277-33AM	6W RETROFIT LED MODULE, 550 LUMEN, 4000K, 277V INPUT, 3" X 3" MAGNETIC MOUNTING PLATE
<b>13w 120v Input</b>	
RFL-M1-13-R-30-120	13W RETROFIT LED MODULE, 900 LUMEN, 3000K, 120V INPUT
RFL-M1-13-R-40-120	13W RETROFIT LED MODULE, 1000 LUMEN, 4000K, 120V INPUT
RFL-M1-13-R-30-120-33A*	13W RETROFIT LED MODULE, 900 LUMEN, 3000K, 120V INPUT, 5.5" X 5.5" MOUNTING PLATE
RFL-M1-13-R-40-120-33A*	13W RETROFIT LED MODULE, 1000 LUMEN, 4000K, 120V INPUT, 5.5" X 5.5" MOUNTING PLATE
RFL-M1-13-R-30-120-33AM	13W RETROFIT LED MODULE, 900 LUMEN, 3000K, 120V INPUT, 5.5" X 5.5" MAGNETIC MOUNTING PLATE
RFL-M1-13-R-40-120-33AM	13W RETROFIT LED MODULE, 1000 LUMEN, 4000K, 120V INPUT, 5.5" X 5.5" MAGNETIC MOUNTING PLATE
<b>14w 120v Input *</b>	
RFL-M1-14-R-30-120	14W RETROFIT LED MODULE, 1350 LUMEN, 3000K, 120V INPUT
RFL-M1-14-R-40-120	14W RETROFIT LED MODULE, 1400 LUMEN, 4000K, 120V INPUT
RFL-M1-14-R-30-120-55A*	14W RETROFIT LED MODULE, 1350 LUMEN, 3000K, 120V INPUT, 5.5" X 5.5" MOUNTING PLATE
RFL-M1-14-R-40-120-55A*	14W RETROFIT LED MODULE, 1400 LUMEN, 4000K, 120V INPUT, 5.5" X 5.5" MOUNTING PLATE
RFL-M1-14-R-30-120-55AM	14W RETROFIT LED MODULE, 1350 LUMEN, 3000K, 120V INPUT, 5.5" X 5.5" MAGNETIC MOUNTING PLATE
RFL-M1-14-R-40-120-55AM	14W RETROFIT LED MODULE, 1400 LUMEN, 4000K, 120V INPUT, 5.5" X 5.5" MAGNETIC MOUNTING PLATE
<b>23w 120v Input</b>	
RFL-M1-23-R-30-120	23W RETROFIT LED MODULE, 1850 LUMEN, 3000K, 120V INPUT
RFL-M1-23-R-40-120	23W RETROFIT LED MODULE, 1900 LUMEN, 4000K, 120V INPUT
RFL-M1-23-R-30-120-55A*	23W RETROFIT LED MODULE, 1850 LUMEN, 3000K, 120V INPUT, 5.5" X 5.5" MOUNTING PLATE
RFL-M1-23-R-40-120-55A*	23W RETROFIT LED MODULE, 1900 LUMEN, 4000K, 120V INPUT, 5.5" X 5.5" MOUNTING PLATE
RFL-M1-23-R-30-120-55AM	23W RETROFIT LED MODULE, 1850 LUMEN, 3000K, 120V INPUT, 5.5" X 5.5" MAGNETIC MOUNTING PLATE
RFL-M1-23-R-40-120-55AM	23W RETROFIT LED MODULE, 1900 LUMEN, 4000K, 120V INPUT, 5.5" X 5.5" MAGNETIC MOUNTING PLATE
RFL-M1-23-R-30-277-55AM	23W RETROFIT LED MODULE, 1850 LUMEN, 3000K, 277V INPUT, 5.5" X 5.5" MAGNETIC MOUNTING PLATE
RFL-M1-23-R-40-277-55AM	23W RETROFIT LED MODULE, 1900 LUMEN, 4000K, 277V INPUT, 5.5" X 5.5" MAGNETIC MOUNTING PLATE



\* For 277v replace -120 with -277 in catalog number

# Accessories

## 12v 1/2" Female NPS Mounting Spikes

Stainless Steel 3 Prong Stake

7" Aluminum Or Brass Stake



**NEW**

Available with 1" Knob

Aluminum or Brass Cap

FA-03-RX-BLT  
FA-03-RX-BRS

FA-03-3P

FA-01-/T/BRS/  
FA-01-2F-/T/BRS

## Hex Cell Mini Louvers

Catalog #	Shape	Fixture(s)
FA-06-5,7	■	FFL-5,7
FA-06-9,13	■	FFL-13
FA-06-26	■	DL-40 Series, FFL-13/26/26-3T, 32-3T/ 42-3T-CST
FA-07	■	DL-04
FA-07-15	■	DL-15
FA-07-16	■	DL-16-NL
FA-07-26	■	DL-10, DL-10-HE
FA-08	●	DL-02
FA-08-06	●	DL-06, DL-20 & SL-20SM series, SL-21 RXD & RXS-PAR series
FA-08-SL20	●	SL-20MD series
FA-08-SL20LG	●	SL-20LG series
FA-08-17	●	DL-17, RXD-03, RXS-05/-08 SL-23
FA-08-21	●	DL-13, DL-14, DL-21, DL-22, DL-44, RXD-01, RXD-02, RXS-04/07/SL-03, SL-16-SS, SL-21, SL-22, SL-53/54
FA-08-23	●	DL-23, RXD-04, RXS-06/-09, SL-39
FA-08-23-C	●	DL-23-COP, SL-23-COP
FA-08-30	●	DL-30 series
FA-08-36C-8	●	SL-36-MR8
FA-08-36C-11	●	SL-36-MR11
FA-08-36C-16	●	SL-36-MR16
FA-08-38	●	DL-38 series

## Colored Flat Tempered Glass Lenses

Catalog #	Shape	Fixture(s)
FA-10-BLUE/GREEN	■	DL-04
FA-10-06-BLUE/GREEN	●	DL-02
FA-10-15-BLUE/GREEN	■	DL-15
FA-10-17-BLUE/GREEN	●	DL-17, RXD-03, RXS-05/-08, SL-23, SL-26
FA-10-20-BLUE/GREEN	●	SL-21, DL-20, RXD & RXS-PAR series,
FA-10-SL20-CLEAR/BLUE/GREEN	●	SL-20-MD series
FA-10-23-BLUE/GREEN	●	DL-23, RXD-04, RXS-06/-09, SL-39
FA-10-23-C-BLUE/GREEN	●	DL-23-COP
FA-10-30-BLUE/GREEN	●	DL-30 series
FA-10-38-BLUE/GREEN	●	DL-38 series
FA-11-AMBER/RED	●	DL-02, DL-13, DL-14, DL-21, DL-22, DL-44, RXD-01, SL-03, SL-53/54
FA-11-BLUE/GREEN	●	SL-16-SS, SL-21, SL-22
FA-11-26-BLUE/GREEN	■	DL-10, DL-10-HE
FA-11-SL-33-AMBER/RED/WHITE	●	RXD-02, RXS-07/-07,, SL-16SS, SL-33
FA-11-SL-33-BLUE/GREEN	●	RXD-02, SL-16SS, SL-33
FA-11-SL-40-AMBER/RED/WHITE	●	SL-40
FA-11-SL-40-BLUE/GREEN	●	SL-40
FA-11-36C-8-BLUE/GREEN	●	SL-36-MR8
FA-11-36C-11-BLUE/GREEN	●	SL-36-MR11
FA-11-36C-16-BLUE/GREEN	●	SL-36-MR16

## Plastic Color Filters

FA-09-5,7-BLUE/GREEN	■	FFL-5,7
FA-09-9,13-BLUE/GREEN	■	FFL-13
FA-09-26-BLUE/GREEN	■	FFL-26

**Acrylic Colored Lenses**

FA-35-BLUE/GREEN	●	SL-11
FA-35-AMBER/RED/WHITE	●	SL-11

**Holiday Enhancements for SL-44 Series Paver Lights**

FA-35SL44-RED/WHITE/ORANGE/BLUE/GREEN	●	SL-44
FA-35SL44-66-RED/WHITE/ORANGE/BLUE/GREEN	●	SL-44-66
FA-35SL44-69-RED/WHITE/ORANGE/BLUE/GREEN	●	SL-44-69

## Linear Spread Flat Tempered Glass Lenses

Catalog #	Shape	Fixture(s)
FA-98	●	DL-02, DL-13, DL-14, DL-21, DL-22, DL-44, SL-22, RXD-01, SL-25, SL-53/54
FA-98-17	●	DL-17, RXD-03, SL-26 RXS-05/-08 SL-23,
FA-98-20	●	DL-06, DL-20, RXD-PAR, RXS-PAR series, SL-21
FA-98-23	●	DL-23, SL-29, SL-39 RXD-04, RXS-06/-09
FA-98-23-C	●	DL-23-COP
FA-98-30	●	DL-30 series
FA-98-36-C-8	●	SL-36-MR8
FA-98-36-C-11	●	SL-36-MR11
FA-98-36-C-16	●	SL-36-MR16
FA-98-33	●	RXD-02, RXS-04,-/07
FA-98-38	●	DL-38 series

## Wide Spread Flat Tempered Sand Blasted Glass Lens Softener

Catalog #	Shape	Fixture(s)
FA-104	●	DL-02, DL-13, DL-14, DL-21, DL-22, DL-44, RXD-01, SL-16-SS, SL-22, SL-25, SL-53/54
FA-104-17	●	DL-17, SL-23, SL-26
FA-104-20	●	DL-06, SL-21 DL-20 series, RXD & RXS-PAR series,
FA-104-23	●	DL-23, SL-29, SL-39 RXD-04, RXS-06/-09
FA-104-23-C	●	DL-23-COP
FA-104-30	●	DL-30 series
FA-104-36-C-8	●	SL-36-MR8
FA-104-36-C-11	●	SL-36-MR11
FA-104-36-C-16	●	SL-36-MR16
FA-104-33	●	RXD-02, RXS-04,-/07
FA-104-38	●	DL-38 series

## Clear Convex Tempered Glass Lenses for Bullet Fixtures

Catalog #	Shape	Fixture(s)
FA-99	●	DL-02, DL-13, DL-14, DL-21, DL-22, RXD-01, SL-16-SS, SL-22, SL-25, SL-22, SL-25, SL-53/54
FA-99-17	●	DL-17, RXD-03
FA-99-20	●	DL-06, DL-20 series, SL-23, SL-26
FA-99-23	●	DL-23,
FA-99-30	●	DL-30 series
FA-99-38	●	DL-38 series
FA-99-RX02	●	RXD-02
FA-99-20SM-SG*	●	SL-20-SM series
FA-99-20MD-SG*	●	SL-20-MD series
FA-99-36-SG-8/11/16*	●	SL-36-MR8/11/16
FA-99-37-SG-8/11/16*	●	SL-37-MR8/11/16

## Clear and Colored Convex Tempered Glass Lenses for Well Lights

Catalog #	Shape	Fixture(s)
FA-10-20-BLUE/GREEN	●	SL-21
FA-10-SL-20-Series/ BLUE/GR*	●	SL-20-SM-/MD-/LG
FA-12	●	SL-01
FA-13-BLUE/GREEN	●	SL-01
FA-15	●	SL-03
FA-16-BLUE/GREEN	●	SL-03

## Well Light Holders/Grates/Eyebrow Available in Aluminum (-AL) or Brass (-BRS)



## 1/2" NPS Extension Wand and Coupler

Available without coupler, add -NC suffix to catalog number. Subtract 1" from length below.



## 12v Quick Connector

To connect 18/2 fixture wire to main cable. 12/2, 10/2, 8/2



FA-05

## Glare/Sprinkler Shield

For AL-01,-04,-05,-06,-07,-11,-12,-14,-15,-16-17,-18,-19



FA-97 +CAT #

## Key to Available Options

**A.** Available in Halogen 10w or 20w SC T3 (Add -H and wattage into catalog #)  
**B.** Available in optional powder coat finishes (See pg. 19) (Add -Color into catalog #)  
**Note:** Optional acid treatments available. (Add -BAT, -BAR, -BAV, -CAR, -CAV into catalog #)  
**C.** Available in unfinished brass (Add -BRS into catalog #)  
**D.** Available in unfinished copper (Add -COP into catalog #)  
**E.** Available in other wattages and/or beam spreads.  
**F.** Available with hex louvers and/or colored lenses  
**G.** Available in stainless steel (Add -SS into catalog #)

**H.** Available in CFL (Specify K Temperature)  
**I.** Available with specialty lenses (Spread, Convex or Softener)  
**J.** Available with adjustable hub (Standard lamp 20w SC halogen)  
**K.** Available with bi-pin Halogen lamps (Add -HBP into catalog #)  
**L.** Available in bi-pin 10,000 hrs Xenon 10w or 20w (Add -XBP and wattage into catalog #)  
**M.** Available in single contact 10,000 hrs Xenon 10w/20w (Add -X and wattage into catalog #)  
**N.** Available with GU24 base CFL Spiral lamps in 13,18 or 26w (Add -13S, 18S, 26S into catalog #)  
**O.** Available in 50w DC T3 Halogen (Add -H50 into catalog #)  
**P.** Available with gold iridescent lens

**Q.** Available in 10 or 18,000 hrs MR16 (Add -ULTRA or -TITAN into catalog #)  
**R.** Available with 4w ARROW MR16 LED or 4w ARROW SAVER MR16 LED (-LED, -LEDAS)  
**S.** Available with 3w Omni 3 LED (-LED3)  
**T.** Available with 2w LED Module (-LEDM) (Supply wattage into catalog #)  
**U.** Available with 3w LED Module (-LED3M)  
**V.** Available with ARROW PAR LED (-LED)  
**W.** Available with 7w/11w LED Module (-LED7M/LED11M)  
**X.** Available with 2w ARROW MR11 LED (-LED)  
**Y.** Available with 2w LED STRIP (-LED5)  
**Z.** Available with 1.5w MR8 LED (-LED)  
**AA.** Available with LED Flat Panel (-LEDP)  
**BB.** Available with 6w MR16 LED (-LED6W)



# Accessories

## Flat Lens Caps (-EC) and Angle Caps (-AC)

For DL-38



FA-36-BRS

For DL-38



Fits EC and AC

FA-99-38

For DL-20



Available in aluminum, brass or composite

FA-38-BRS

For DL-30



Available in aluminum or brass

FA-40-BRS

Angle Cap for DL-20 available in aluminum, brass or composite



C/FA-38-AC-BRS

Angle Cap for DL-30 available in aluminum & brass



FA-40-AC-BLT

Angle Cap for DL-38 available in aluminum or composite



C/FA-36-AC-BLT

Add -99 for Convex Lens; -LF for Flat Lens to catalog number. For brass, add -BRS to catalog number.

## Surface Canopies **NEW**



FA-24-MD-CSTPC-BRS



FA-24-MD-CST-BAR

FA-24-MID-CST-POST-BLT

FA-24-MID-CST-POST-BRT

## SL-20 SERIES CONCRETE FORMS



FA-FORM-SL20SM  
Ø4.75" x 4"



FA-FORM-SL20MD  
Ø7.50" x 4"



FA-FORM-SL20LG  
Ø9.25" x 4"

## Single 1/2" NPS Hole Commercial Mounting Pedestals

Caps available in aluminum, composite and brass. Custom lengths available-consult factory.



FA-25-BRS (12v)  
FA-26-BRS (120v)



CFA-25-BRT



FA-26-GFIC  
-BLT



FA-26-75W-BLT with  
75w transformer

**NOW AVAILABLE WITH BRONZE ABS EXTRUDED POSTS!**

**NEW**



For mounting transformers off of structure

Supplied with black GFIC duplex receptacle, LED indicator & weatherproof cover (transformer sold separately)

Now available in Bronze Composite



FA-26-TMS1-BLT (For 1 transformer)  
FA-26-TMS2-BLT (For 2 transformers)

## JUNCTION BOXES & ADAPTERS FOR ONE OR MORE FIXTURES



"Y" Adapter  
FA-YAD-BLT  
(2) 1/2" NPS Holes

**NEW**



FA-111-SM-H-COP



CFA-111-T  
FA-111-T-BRS

Now in Composite! Oversized to Accommodate LED Drivers & Transformers



"T" Adapter  
Brass or Aluminum



FA-111-SM-BRT



FA-22-T-BLT



FA-24-MDCST-T-WBR

FA-TAD-WBR  
(2) 1/2" NPS Holes

Adjustable Tree Mounts with Rubber or Polyester Straps and Canopy

2 1/4"/6"/8" Polyester strap lengths 1" or 2" widths

**NEW**



FA-22-TPS24BRT



FA-24MD-TPS4-BRT



FA-24-TC-BRS



FA-24-T-BRS

10"; stretches to 15"

15"; stretches to 22"

21"; stretches to 30"

31"; stretches to 45"

41"; stretches to 61"

FA-24-Strap

## Junction Boxes/Tree Mounts



**NEW**



**NEW**



**NEW**

NOTE: Fixtures are not included with Junction Boxes/Tree Mounts

FA-111-TAD-BAR  
12v / 120v

CFA-111-TAD-BRT  
12/120v

FA-24-MDCST-BAR  
12v

## FA-TR SERIES TREE RING

CATALOG NO.

DESCRIPTION

FA-TR-204H-BLT

FA-TR-246H-BLT

FA-TR-204H-BRS

FA-TR-246H-BRS

FA-JBOXTR-BLT

FA-JBOXTR-BRS

20" Aluminum Tree ring accommodates up to 4 fixtures.  
24" Aluminum Tree ring accommodates up to 6 fixtures  
20" Brass Tree ring accommodates up to 4 fixtures  
24" Brass Tree ring accommodates up to 6 fixtures  
Aluminum J-Box for Tree Ring  
Brass J-Box for Tree Ring



## POWDER COAT FINISHES

Standard Black Texture (-BLT)

White Texture (-WTX)

Bronze Texture (-BRT)

Rust (-RST)

Antique Verde (-ATV)

Rubbed Verde (-RBV)

Hunter Texture (-HTX)

Weathered Brown (-WBR)



Stucco (-STU)

Weathered Iron (-WIR)

Camel Tone (-CAM)

Chrome Powder (-CPR)

Brass or Copper Acid Verde (-BAV)(-CAV)

Brass or Copper Acid Rust (-BAR)(-CAR)

Black Acid Treatment (-BAT)

## NOTES:

- Conforms to UL 1838 and 1598, 506, 153 Standards.
- All fixtures are supplied with mounting FA-03 spikes except the following: Step, Brick, Well, Hanging, Up/Down, Underwater and 120v fixtures.
- Standard finish is black texture polyester powder coat.
- Acid treatment finishes available for brass and copper only.
- All fixtures include lamp except those with -NL and SL-08-T10 series.
- Consult factory to convert 12v fixtures to 120v.
- To order fixtures without lamp add -NL to catalog.#
- To order fixtures without stake add -NS to catalog.#
- For custom products/finishes consult factory.



**4w & 8w LED FLAT PANEL RETROFIT KIT**  
**Surface Light Conversion To FOCUS LED Panels**

There are millions of energy wasting surface fixtures in hallways, corridors, stairwells and entrances that need to be replaced. FOCUS has the LED solution. Easily convert any incandescent or fluorescent surface lamp to energy saving LED with FOCUS Surface Lamp Retrofit Kits




- |                       |                       |                       |                          |
|-----------------------|-----------------------|-----------------------|--------------------------|
| FL-LE-DP8W70001<br>8w | FL-LE-DP8W70002<br>8w | FL-LE-DP4W35001<br>4w | FL-LE-DP4W35002<br>2w/4w |
|-----------------------|-----------------------|-----------------------|--------------------------|
- 12v Driver: HW-12-870012-LED  
 120v Driver: HW-12-10700120LED  
 277v Driver: HW-12-20700277-LED  
 630 Lumens
- 12v Driver: HW-12-5350-12-LED  
 120v Driver: HW-12-6350120LED  
 240v Driver: HW-12-6350240LED  
 277v Driver: HW-12-6350277LED  
 350 Lumens / 300 Lumens

**4w & 8w LED FLAT PANEL RETROFIT KIT**  
**For Step Lights**

**Simply Insert The Kit Directly Into Any Existing Back Box**

**12v, 120v or 277v Driver Included:**  
 Easily Retrofits into ANY Manufacturers Brick Lights • 4w & 8w / 50,000 hours  
 Minimum Inside Dimensions of Back Box  
 Small: 4" (w) x 2" (h) x 2.5" (d)-or Large: 6.25" (w) x 2" (h) x 2.5" (d)  
 Custom Brackets Available to Fit Larger Back Boxes

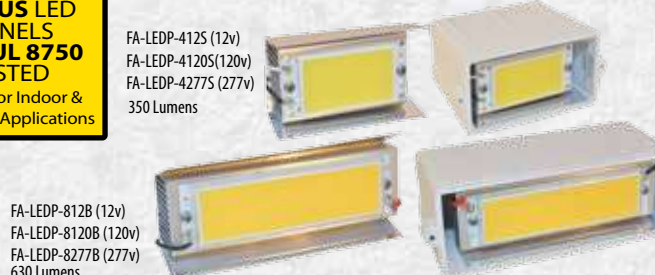

**FOCUS LED PANELS ARE UL 8750 LISTED**  
 Rated for Indoor & Outdoor Applications

**LED SOLUTIONS** 4 EXCITING TECHNOLOGIES **GO GREEN**  
 LED LIGHT SOURCE OPTIONS FROM 12v-277v RETROFIT/ MODULE / FLAT PANEL / STRIP




Catalog Number	Description	Volts	Hours	Color Temp (K)	Watts	Warranty
FL-LED-OMNI3	SC base LED	12v	50,000	3000	3w	5 years
FL-LED-OMNI3BP	Bi-Pin LED	12v	50,000	3000	3w	5 years
FL-LED-MR16-BAB	MR16 5.3 bi-pin LED 35° (BAB) Flood	12v	50,000	2800-3000	4w	10 years
FL-LED-MR16-ESX	MR16 5.3 bi-pin LED 12° (ESX) Spot	12v	50,000	2800-3000	4w	10 years
FL-LED-MR16-AS40	MR16 5.3 bi-pin LED 40° (BAB) Flood	12v	40,000	2800-3100	4w	5 years
FL-LED-MR16-AS15	MR16 5.3 bi-pin LED 15° (ESX) Spot	12v	40,000	2800-3100	4w	5 years
FL-LED-MR166W40	MR16 5.3 bi-pin LED 40° (BAB) Flood	12v	50,000	2800-3000	6w	5 years
FL-LED-MR16GC-85D-30-35/-15	MR16 5.3 bi-pin LED 35° Flood or 15° Spot	12v	25,000	3000	8.5w	3 years
FL-LED-MR11-40	MR11 GU4 bi-pin LED 40° (FTD) Flood	12v	50,000	2800-3000	2w	5 years
FL-LED-MR11-15	MR11 GU4 bi-pin LED 15° (FTB) Spot	12v	50,000	2800-3000	2w	5 years
FL-LED-MR8NL	MR8 GU4 bi-pin LED 120°	12v	25,000	2800-3100	1.5w	3 years
FL-LED-AR111-15	AR111 LED 15° Spot	12v	50,000	2800-3000	13w	5 years
FL-LED-AR111-40	AR111 LED 40° Flood	12v	50,000	2800-3000	13w	5 years
FL-LED-PAR36-15/24/-40/-60	PAR36 LED 15°, 24°, 40° or 60° Floods	12v	50,000	2800-3000	10w	5 years
FL-LED-120V-MR16-BAB	MR16 GU10 bi-pin LED 35° (BAB) Flood	120v	50,000	2800-3000	4w	10 years
FL-LED-120V-MR16-ESX	MR16 GU10 bi-pin LED 12° (ESX) Spot	120v	50,000	2800-3000	4w	10 years
FL-LED-P16-2430/3630	E26 Med. Base PAR 24° Spot or 36° Flood	120v	40,000	3000	7w	5 years
FL-LED-P2015-27K	PAR20 LED 15° Spot	120v-277v	50,000	2800-3000	9w	5 years
FL-LED-P2040-27K	PAR20 LED 40° Flood	120v-277v	50,000	2800-3000	9w	5 years
FL-LED-P3015-27K	PAR30 LED 15° Spot	120v-277v	50,000	2800-3000	15w	5 years
FL-LED-P3040-27K	PAR30 LED 40° Flood	120v-277v	50,000	2800-3000	15w	5 years
FL-LED-P3815-27K	PAR38 LED 15° Spot	120v-277v	50,000	2800-3000	21w	5 years
FL-LED-P3840-27K	PAR38 LED 40° Flood	120v-277v	50,000	2800-3000	21w	5 years
Consult factory for available fixtures	Flat panel LED	12v	50,000	3000 (std)   5200 (-52)	2w/4w/8w/12w	5 years
Consult factory for available fixtures	LED Module	12v	50,000	2800	3w/7w/11w/15w	5 years

Note: All FOCUS LED's are for use with a magnetic power supply only. LED Module, MR16, MR11 AR111 & PAR series LED's must be installed in a sealed fixture. Non-dimmable. DOE LM79 tested / LM80 compliant. Power factor >90%. \* Not for use w/ Flat Panel LEDs

**★ FOCUS INDUSTRIES®, INC.**

**WORLD HEADQUARTERS**  
 25301 Commercentre Drive, Lake Forest, CA 92630  
 Phone: (949) 830-1350 • Toll free: (888) 882-1350  
 www.focusindustries.com  
 E-mail: focus@focusindustries.com **To order** (distributors only) orders@focusindustries.com



**REGIONAL DISTRIBUTION CENTER**

PENNSYLVANIA 11500 Roosevelt Blvd., Unit G-1, Philadelphia, PA 19116  
 Ph (215) 677-6870 • Toll Free (800) 468-0801 • Fax (215) 677-1261 • sales@associatedmarketing.net