

A couple is sitting on a stone fire pit at night. The fire pit has a large fire burning in the center. In the foreground, two wine glasses filled with red wine are placed on the edge of the fire pit. The scene is illuminated by the warm glow of the fire and the ambient light of the night.

COMMERCIAL
AND RESIDENTIAL
OUTDOOR PRODUCTS



Hearth Products Controls
Fire Inspired Since 1975

OUTDOOR PRODUCTS CATALOG

FIRE • WATER • FIRE AND WATER

2018-2019

TABLE OF CONTENTS

- 4 MAP Policy - Minimum Advertised Price
- 6 Warranty Program
- 7 **Fire Pit Controls... Explained**
- 12 **Fire Pit Inserts:** Round Bowl Insert Models
- 14 Round Flat Insert Models
- 16 Square Bowl Insert Models
- 18 Square Flat Insert Models
- 20 Rectangle H-Burner Insert Models
- 22 Rectangle S-Fire Insert Models
- 24 Linear Trough Insert Models
- 26 Linear Interlink Insert Models
- 28 **Control Options-** Inserts
- 29 Push Button Ignition Kits- Unassembled (FPK)
- 30 Match Lit Kits- Unassembled Flex Line (FPS)
- 33 Ready to Finish Packages - Enclosures
- 40 Copper Bowl Series- Fire, Fire/Water
- 43 Water Feature Inserts - Info
- 44 Evolution 360 Series- Fire and Water
- 45 H2Onfire Series- Fire On Water
- 46 TK Torch Series
- 47 **Accessories** Glass Wind Guards, Install Collars, Lava Rock, Decorative Glass, Outdoor Logs, Hard Covers, Vinyl Covers, Access Doors, Vents, Ready-to-Finish Enclosures
- 54 Flame Control Systems
- 55 **Outdoor Burners**
- 60 **Fire Pit Components:** Pans, Flex Line, Decorative Key Valves, Regulators, Igniters
- 64 **Replacement Components**
- 67 **APPENDIX- Accessories for Inserts**
- 71 P.O.P Products - Showroom Displays

CONTACT



Hearth Products Controls Co

**3050 Plainfield Rd
Kettering, OH 45432
Phone: 877.433.7001
Fax: 877.433.0704**

Email: orders@hpcfire.com



hpcfire.com

Printed March 2018

COVER PHOTO
H2Onfire - Monaco Series

WHO WE ARE

Hearth Products Controls Company (HPC) was originally a division of The Maddox Company (founded by Dan Maddox) incorporated on December 1, 1975. TMC was active in the hearth products industry as a manufacturers representative, one step & two-step distributor, and as a manufacturing division. The HPC division began in 1989; HPC was split off as a separate corporation in 2001.

The foundation of the company was built on safety pilot valve, millivolt valve, and remote control kits / repair parts, as well as various other components for the hearth industry. We then diversified our thinking by introducing the Outdoor Fire Products line in 2003 with the manufacturing of fire rings. Today this segment of the business has grown to include over 300 CSA Certified Models with various technologies including match lit, manual spark/flame sense and high-end remote electronic ignition fire pit inserts. Also available are TK Torches, copper water bowls, outdoor accessories, and a selection of stainless steel components second to none.

HPC also designs custom fire features and their control systems in many shapes and sizes for residential or commercial applications. These range from 2 feet to 50 feet wide, from 50 thousand Btu's or more. These fire features - found at large venues throughout the world including casinos, resorts, and restaurants. HPC is committed to R&D of current and new product.

We are located in Kettering, Ohio. Our facility houses manufacturing, warehouse & of course the always helpful office staff. We have a very diverse, experienced and knowledgeable group of Sales Reps throughout the U.S. & Canada that cover every state & region. We have numerous distributors & retailers in North America in industries including hearth, landscape, pool & spa, outdoor kitchen, patio furniture, and outdoor lighting just to name a few. For your support, we have staff that is second to none as our NFI Certified technical support and management team understands the industry and your needs.

OUR OPERATING STANDARDS

- Value every customer regardless of size.
- Treat customers, as we would like our sources to treat us.
- Make products that are as widely applicable as possible.
- Use the best possible components in our products.
- Keep overhead as low as we can, consistent with good service and fair prices.
- Continuously looking for ways to improve our present products and services as well as searching for additional services and products our customers want or need.
- Be professional in all actions, products, and materials.
- Keep as aware as we can of industry trends and changes.
- Keep our inventories at a level consistent with quick and complete shipment of orders.



Photo Courtesy of Blackfish Homes Ltd. - North Vancouver, BC

MISSION STATEMENT

HPC will strive to be the leader in our industry through safe, innovative, high quality products and more importantly provide excellent customer service, training, and education to our valued customers and community.



WHAT WE DO

Working within our mission statement and operating standards HPC does the following and much more!

- *Develop, construct, and package the most useful and easy to use kits in our industry for gas log repair.*
- *Offer custom kits to meet any customer needs with our label, no label or with our customer's label.*
- *Have components manufactured just for our use which are the best on the market.*
- *Provide a variety of products to assist in the installation and servicing of hearth products.*
- *Provide excellent customer service & state-of-the-art NFI-Certified technical support for our kits and products.*
- *Offer broad line of outdoor burners including our patented Penta burners, fire rings, H-Burners, T-Burners, linear, and dual burners.*
- *CSA Certification on over 300 models of match-lit, push button and electronic ignition fire pits inserts.*
- *Design & build custom fire pit inserts and burners.*
- *Orders are shipped within 2 - 5 days upon receipt of PO for majority of product.*
- *Always offer a live attendant on our phone lines 8:00AM—5:00PM, Monday—Friday, Eastern Standard Time.*
- *R&D Strong - always engineering and developing innovative, safe products.*
- *Product safety is our top priority - to educate both dealers and end users on safe installation and operation of products.*
- *Offer a diverse line of products from indoor hearth to outdoor fire, and unique innovative water features.*
- *Also have after hours voice mail and website is available 24/7 at www.hpcfire.com*

SMALL ORDER SURCHARGE

We have a small order surcharge on orders of \$50.00 or less.
Surcharge of \$5.00 is applied to orders of \$0.01—\$24.99
Surcharge of \$3.00 is applied to orders of \$25.00—\$49.99

FREIGHT POLICY

Most orders will be shipped FOB Kettering, Ohio, with a standard shipping carrier selected by HPC unless customer specifically requests their own carrier and account. A handling fee will be charged for use of non-standard HPC carriers. A freight quote may be requested in advance. HPC works diligently with standard carriers to achieve the best discounts available.

LIVE BURN PROGRAM

You will receive credit for future purchases on the following products that you install in a live burn display at your facility or your outdoor demo area. Purchase these products, install in live burn area, take a picture of the live burn demo and forward it with your request for credit. Please note this is not an up front discount. If live burn credit request is not received in 30 days, credit will be applied to account when approved. (Payment is due in full Net 30.) Fifty percent (50%) credit of the demo items will be applied to your account on a manual control valve kit, safety pilot kit, millivolt kit, and CSA-Certified fire pit inserts. Ten percent (10%) credit on demo of Evolution 360 Series. The live burn demo credit does not apply to custom products, complete packages (Copper Bowls and Enclosures), individual components and media.

CREDIT POLICY

All shipments are billed in US Dollars and must be paid in US Dollars. Our regular terms are Net 30 days from the invoice date.

- 1 *If an invoice becomes 10 days past due, the account may be placed on credit hold. Placing an account on credit hold restricts the shipment of future orders.*
- 2 *When an invoice becomes 15 days past due, we reserve the option to apply a 1.5% per month finance charge back to the due date of the invoice and for any 30 day period going forward in which the invoice remains unpaid. The account terms may be changed to Credit Card or Cash in Advance.*
- 3 *If an invoice becomes 30 days past due, your account may be referred to an outside collection agency unless we have jointly agreed to a payment schedule or plan.*
- 4 *When the account is referred to a collection agency, the collection charges must be repaid. Also, we reserve the right to make the account terms Credit Card, or Cash in Advance.*
- 5 *Any discounts received on a delinquent invoice may be revoked and expected to be paid. HPC reserves the right to discontinue future discounts.*
- 6 *Customers receiving regular discount and/or volume order discount must pay by check, not credit card.*
- 7 *Net 30 invoices must be paid via check. Use of credit card is not allowed on invoices where terms have been extended.*

If you ever have a temporary payment issue or we have made a mistake on an invoice, please call us immediately to discuss and resolve the problem.

Sincerely,
Greg Steck

A handwritten signature in black ink, appearing to read "Greg Steck", written over a light blue background.

President
Hearth Products Controls Co.

We accept:



MINIMUM ADVERTISED PRICING (MAP) POLICY

Look for:
MAP
APPLIES



Photo Courtesy of Blackfish Homes Ltd. - North Vancouver, BC

Hearth Products Controls Company (the "Company") has unilaterally adopted this Minimum Advertised Pricing policy ("Policy"). This Policy is subject to change at any time by the Company at its sole discretion.

1. Purpose: The purpose of this policy is to protect the value of the Company's trademarks and brand names and to attract and retain reputable, customer-friendly resellers.

2. Scope: This Policy is applicable to all sellers of the Company's products (the "Products") who advertise or sell Products on any platform ("Resellers") and to distributors ("Distributors") that sell to such Resellers. This Policy applies to all Products of the Company unless otherwise specified by the Company. The Policy applies to prices advertised anywhere including but not limited to magazines, newspapers, flyers, catalogs, coupons, mailers, television, radio, signs, websites, social media, order entry/purchase order forms, direct e-mail advertising and related materials that are accessible through the Internet platform(s) by means of a hyperlink.

The Policy does NOT apply to advertising displayed only in the store and not distributed to the customer for Products to be sold in-store.

This Policy does NOT apply to the price at which the Products are actually sold. Nothing in the Policy or other agreement with the Company will constitute an agreement on the price or price levels at which Resellers or Distributors actually sell any Product.

3. Minimum Advertised Price (MAP): The advertised price of a Product means the net price advertised after all discounts, rebates, gifts or promotional items. The Minimum Advertised Price ("MAP") shall be set by the Company from time to time in its sole discretion and shall be communicated by the Company to the Resellers from time to time. If the Company makes the MAP available on a website accessible to the Reseller and informs Reseller of this, it is the responsibility of the Reseller to maintain current knowledge of the MAP.

4. Policy on Price Advertising: It is the policy of the Company that Resellers shall not advertise any Company Product at prices below the MAP for that Product established by the Company. This policy is not violated by Reseller advertising a higher price. Also, this policy is not violated by communication by email or telephone to an individual customer in response to a telephone or email inquiry from the customer. Statements such as "call for pricing" for a Product do not violate the Policy as long as a price for the Product is provided on the same paper or website and that price is equal to or exceeds the MAP. Also, it is a violation of this Policy for the Reseller to characterize or disclose any pricing as the minimum advertised price or that such minimum is based on the Company's policies. Resellers and Distributors have not agreed to this unilateral Policy and the Company is not seeking any such agreement. However, if a Reseller or a Distributor violates this Policy, the Company's policy is to take certain unilateral actions.

5. Actions by the Company: The Company has the right to sell Products to each Reseller or Distributor or to refrain or stop from doing in its discretion for any reason or for no reason. Under this Policy, if Reseller advertises Products below the MAP or otherwise violates this Policy, the Company may cease selling or shipping Products to Reseller or its customers and/or cease taking orders from Reseller for a temporary or permanent period in the Company's discretion, which may take into account circumstances such as the number of violations or the repetition of violations. Also, if a Distributor sells Product to any Reseller that violates this Policy, the Distributor will be in violation of the Policy and the Company may cease selling or shipping Products to that Distributor or its customers and/or cease taking orders from that Distributor for a temporary or permanent period in the Company's discretion, which may take into account circumstances such as the number of violations or the repetition of violations. The Company will take these actions unilaterally and will not seek or accept any agreement by a Reseller or a Distributor or any assurance of future compliance by that Reseller or Distributor.

6. Contact Information: Company sales personnel have no authority to modify or grant exceptions to this Policy. All questions or comments regarding this Policy should be directed to the policy administrator at info@hpcf.com.

PRODUCT RETURN POLICY

All returned product must have an RMA (Return Merchandise Authorization) issued by one of our technical support staff, so please call to get an RMA. To get an RMA please have your original purchase information available and contact the technical support staff. A support person will attempt to solve the problem over the telephone. If the technical support staff cannot troubleshoot the problem over the phone, a RMA and a return services label will be issued.

The RMA number must be indicated on the outside of the returned package and a copy of RMA paperwork should be within the package. The RMA is valid for 30 days after issued. Once we receive the product back, testing will begin.

It is important to note the complete unit must be returned in order to test the product. If all parts needed to test the unit are not returned, parts needed will be charged to the customer and unit will be returned complete to the customer. If you have any questions on what should be returned, please contact the technical support staff.



Photo Courtesy of First Coast Pools - Florida

PRODUCT TESTING PROGRAM

A Product Testing Report will be filled out by our testing department showing what was found in testing and the disposition of tested products.

DEFECTIVE: If an item is found to be defective it will be repaired or replaced at our discretion. HPC will absorb all costs of incoming/outgoing freight and replacement or repair costs if product is in warranty.

NON-DEFECTIVE: If the product is found to be non-defective it will be returned to the customer — no credit will be given. Freight in and freight out are at customers expense.

HPC ERROR: If a return is needed due to a mistake on our part, we will issue a RMA and Return Services Label. When products are received at HPC, credit will be issued for the products and the outgoing freight on the original invoice.

CUSTOMER ERROR: If an RMA is asked for and covers current new products in the original package, we will authorize the return. The customer is responsible for the return shipping. When products are received we will issue credit for the original customer cost less a 20% restocking charge. Custom orders do not apply.

EXCESS INVENTORY: If due to excess customer inventory (of current new products in original packages only) we may issue a RMA. The customer is responsible for the return shipping. When products are received we will issue credit for the original customer cost less a 20% restocking charge.

REMOTE CONTROLS: Please confirm you have replaced the batteries in the handheld remote and receiver, and reprogrammed the remote before returning the unit to Hearth Products Controls under warranty. If your remote is found to be non-defective except for weak or bad batteries, you will be charged for any freight charges incurred for the return.



WARRANTY PROGRAM

Hearth Products Controls Company warranties product against manufacturing defects that prevent safe and correct operation of the product commencing from the date of original sale or shipment from HPC. The warranty on parts and in-house labor will apply only to claims presented to us by our original customer and is in lieu of all other warranties expressed or implied. Please refer to the Warranty Chart below for warranty periods.

The defective product must be shipped back with an RMA (Return Merchandise Authorization) issued by HPC for that specific product which states the nature of the defect or warranty claim. Product to be returned should be packed carefully—HPC is not responsible for shipping damage on returned items. The original purchase information will be required. RMA's are only valid for 30 days from the date of issue by HPC and will not be processed if received after the expiration date. The RMA number must be indicated on the outside of the return package and a copy of the RMA should be placed in the package with product.

Our warranty does not cover items that have been damaged by over heating, modification, abuse, improper storage, installation, or maintenance. This warranty excludes claims for incidental or consequential damage and indirect-collateral expenses arising from product defects or warranty recovery. Appliances manufactured by HPC including CSA Certified models, cannot be altered or modified in any way.

Hearth Products Controls Company is not responsible for local codes and / or if any of our products are not approved for installation. Please check with your local authorities or governing agencies for proper approvals before purchasing. HPC is not responsible for the actions including negligence of the installer.

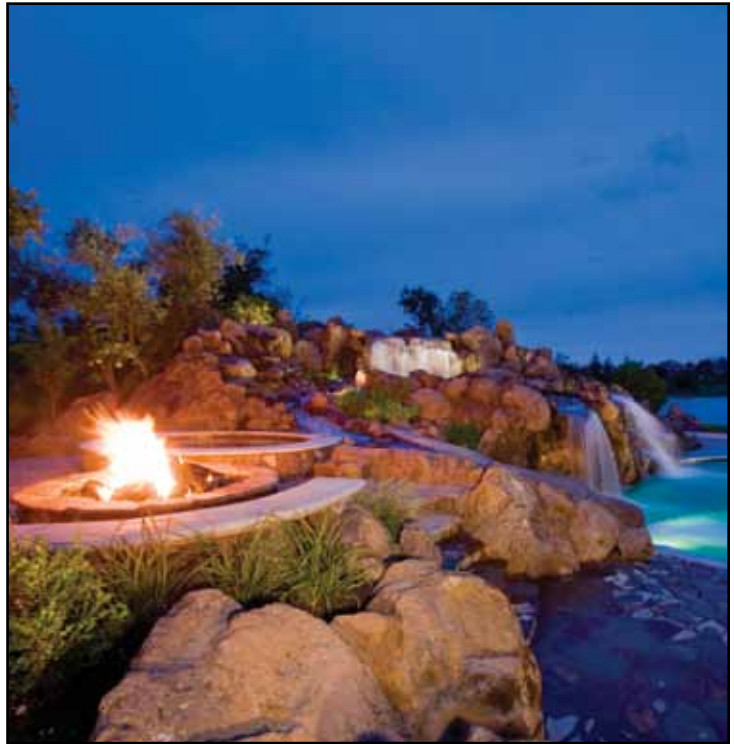


Photo Courtesy of Goddard

WARRANTY POLICY

Components	Application	
	Residential	Commercial
Outdoor Fire Components		
Electronic Components and Gas Valves	3 years	1 year
Pilot Assembly	2 years	1 year
Stainless Steel Components	5 year	1 year
Cold Rolled Steel Components	1 year	6 months
Outdoor Logs	5 years	5 years
Unfinished Fire Pit Enclosure	5 years	5 years
Copper Bowl Series <i>(Normal Weathering Expected)</i>	3 years	3 years
Aluminum Fire Pit Covers	3 years	3 years
Evolution360™ & H2Onfire Series		
Polyethylene Basin and Liner	3 years	3 year
Water Pump	2 years	1 year
Float and Sensor	2 years	1 year
Hose and Fittings	2 years	2 years
Electronics and LEDs	2 years	1 year

HPC FIRE PIT CONTROLS *Explained*



THE NEXT 3 PAGES WILL HELP DECIDE...

- How to light the fire pit?
- Does the fire pit need flame sensing?

HPC OFFERS THREE FLAME CONTROL OPTIONS FOR OUR CERTIFIED FIRE PIT INSERTS- ALL OF WHICH OFFER OPTIONS THAT BEST FIT YOUR NEEDS.



①

Remote Electronic Ignition (EI Series)
(Pg. 8)



②

Push Button / Flame Sense (FPPK Series)
(Pg. 9)



③


Match Lit System (MLFPK Series)
(Pg. 10)



Photo Courtesy of Weavers

① REMOTE ELECTRONIC IGNITION CONTROL (EI SERIES)

This is our top-of-the-line system featuring the ignition ease with use of a wall switch or handheld remote to control flame as well as auto-relight if flame loss. This year we are launching a new control system with numerous convenience and performance improvements for both On/Off Models and our newly introduced High/Low Models- such as High/Low flame control via our new remote, a redesigned hot surface igniter and many other improvements.

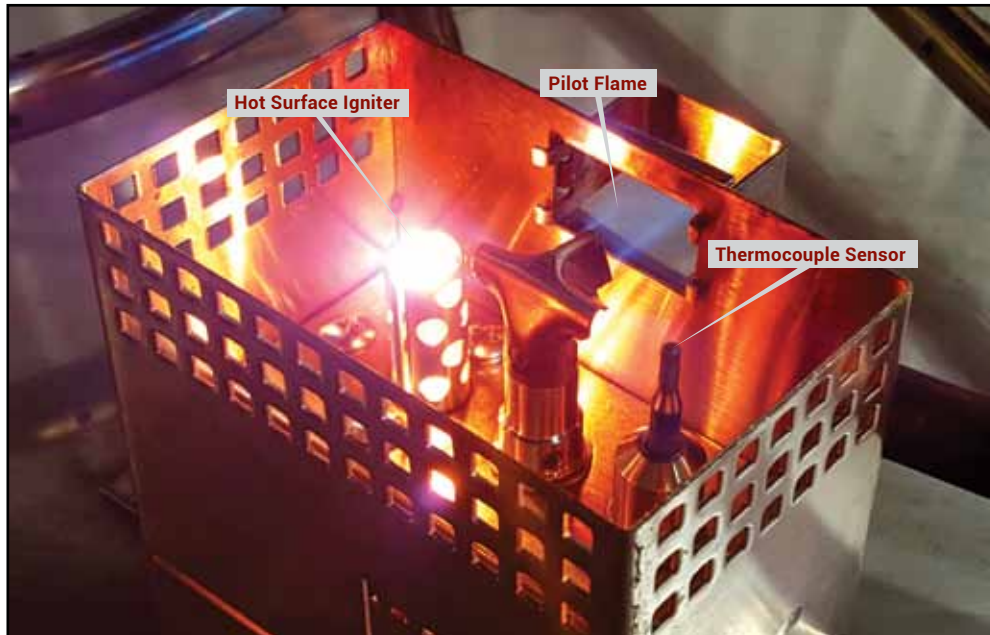

Igniter / Sensor are protected from outdoor elements in the blowout box



How It Works

Start Up: This is done by use of a wall switch or remote control. When the ON command is received, the system completes initial safety checks then starts flow of pilot gas. After 5 seconds the hot surface igniter glows igniting pilot flame. When the system confirms pilot flame present, the main burner gas will flow ignited by the pilot flame.

Operation: While enjoying the ambiance of your fire pit, the system is at work monitoring flame status, internal temperatures / voltages and other safety parameters. If flame loss does occur, the system will turn off all gas flow, and then restart by automatically commencing Start sequence.

On/Off Models: Includes the convenience and safety features- optional remote control available.

High / Low Flame Control Models: This option includes a smart remote and App via smart device control with 2-way communication with the fire pit. Remote allows flame height control while receiving information from fire pit to advise user of fire pit status (flashing LED).


Shut Down: To turn OFF the fire pit simply use wall switch, remote control or whole house system.

Features

- Fully Assembled- ready to install. Control components are protected within valve box.
- Start via wall switch or remote control; Auto re-light if flame is lost.
- Ignition is complete using a robust and reliable Hot Surface igniter.
- On/Off models: Use with optional wall switch, Remote Control or your whole house system
- High/Low Flame Control Models: Adjust high setting to low setting- ~45% turndown (Remote Control included). Not for use with your whole house system.
- 120vac: Standard outdoor grounded power cord- simply plug into GFCI outlet.
- 24vac Option: Typically used with lower voltage requirements.
- Natural Gas or Liquid Propane: Factory built & tested for either fuel.
- Internal temperature monitoring with overheat auto shutoff.
- CSA Certified in US & Canada to ANSI Z21.97-2014 / CSA 2.41-2014 requirements. (This new EI system already meets upcoming 2020 ANSI requirements).
- Optional Controls: On/Off Remote, Timers, Power Supplies and an Emergency Shutoff. (Pg. 28)

② PUSH BUTTON / FLAME SENSE CONTROL (FPPK SERIES)

This is our mid-range fire pit insert utilizing safety pilot flame control- simply push ignition button and valve control knob to start... flame adjustment is done with knob. This battery operated system is a good solution for flame sensing necessity without AC power requirements.

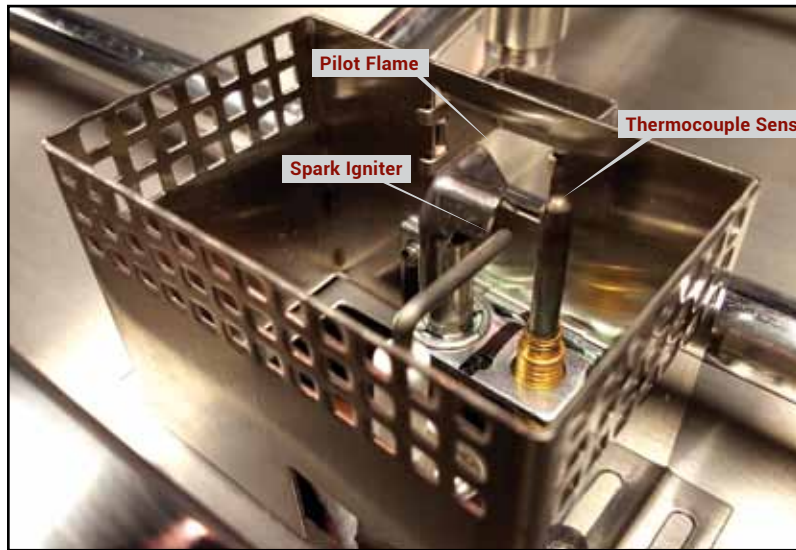

FPPK30X12-H-Flex

Flex Line - Whistle Free



Igniter / Sensor are protected from outdoor elements in the blowout box



FPPK Mounting Sleeve - Pg. 29 (Optional)

How It Works

Start Up: This is done by simultaneously pressing valve control knob to start flow of pilot gas and pressing ignition button for spark. Release spark after pilot ignition, release valve control knob after ~20 seconds. Then turn valve control knob counterclockwise to light main burner.

Operation: Flame height may be adjusted by turning valve control knob- counterclockwise provides more flame, clockwise lowers flame. If flame loss does occur, the system will automatically turn off all gas flow.

Shut Down: To turn OFF the fire pit simply turn valve control knob clockwise- slightly depress knob to reach OFF position.

Features

- Fully Assembled and ready to install. Control components are protected within valve box.
- Flex Line configuration provides versatile and simple installation.
- Start ignition with push button and valve control knob.
- Flame sensing- system will turn off gas if flame is lost.
- Flame height is adjustable using valve control knob.
- Battery Operated System- is perfect solution for installs with no power.
- Natural Gas or Liquid Propane: Factory built & tested for either fuel.
- CSA Certified in US & Canada to ANSI Z21.97-2014 / CSA 2.41-2014 requirements.
- Optional Install: Control Box Sleeve for mounting in pavers, metal and more. (Pg. 29)

③ MATCH LIT (MLFPK SERIES)

This is our simplest certified fire pit insert- easy to operate and requires the least amount of maintenance.



30" X 12" Match Lit
(MLFPK-FLEX)



MLFPK Paver Bracket - Pg. 29
(Optional)



Flex Line - Whistle Free



Mounting Bracket

How It Works

Start Up: This is done by lighting long-stem lighter next to perimeter of burner then slowly open key to valve. Leave key in valve during use.

Operation: Flame height may be adjusted by turning key to valve- counterclockwise provides more flame, clockwise lowers flame.

Shut Down: To turn OFF the fire pit simply turn key to valve clockwise to OFF position. Remove key.

Features

- Fully Assembled and ready to install.
- Flex Line configuration provides versatile and simple installation.
- Valve mounting bracket included- for safe mounting of control have.
- Flame height is adjustable using key valve.
- Natural Gas or Liquid Propane: Factory built & tested for either fuel.
- CSA Certified in US & Canada to ANSI Z21.97-2014 / CSA 2.41-2014 requirements.
- Optional Install & Controls: Paver Block Bracket, Key Extension Kit, and Long Keys.

WHY CHOOSE A PENTA BURNER

OVER OTHER RINGS & BURNERS?

HPC has been the leader in fire ring and burner technology since 2003- launching numerous innovative designs including linear trough, dual burner and our original gas fire ring.



In 2012, HPC introduced the Penta Burner- a very unique and innovative burner design that delivers a very full campfire effect...much more evident than any other burner or fire ring on the market. This is accomplished by the 12 & 3 o'clock burner ports on each lobe of the burner (except on the lobe tips) by design to reduce risk of excessive heat exposure to enclosure cap. This port design also prevents a distinct burner pattern when on lower flame setting- unlike many fire rings or burners.

The Penta Burner design requires less fuel to deliver the same flame height versus other fire rings resulting in lower cost to operate. The Penta Burner has received multiple Utility and

Design Patents highlighting the innovation, technology and unique appearance behind the design.

Features

- Made of #304 Stainless Steel with a 5 year warranty.
- Raised-hub design prevents water from entering gas valve.
- Burner ports drilled at 12 & 3 o'clock positions for full flame.
- No distinct burner pattern at low setting.
- Low profile design requires less lava, glass or other media.
- Full range of sizes- from 12" to 48" available.
- Patented Technology- Utility and Design Patents Apply



SPIDER GUARD

SAFETY AND PROTECTION FROM HPC

It is a known fact that spiders are very attracted to LP gas. Over the years we occasionally see a clogged air mixer / orifice due to a spider nest, resulting in a gas leak out the venturi and filling the fire pit cavity. To prevent this, all certified LP fire pits will utilize a "spider guard" to prevent this potentially serious situation.



ROUND INSERT MODELS

FULLY ASSEMBLED, COMMERCIAL GRADE, CERTIFIED INSERTS

All fire pit inserts come fully assembled and include installation and operation instructions.

MAP
APPLIES

ROUND BOWL INSERTS

An HPC original- this stainless steel, spun bowl design was launched in 2004...and today is still our most popular pan style.

Benefits: Sidewall helps with media retention; Pan Lip provides for recessed burner / blowout box.

Features:

- Made of #304, 18 gauge Stainless Steel
- Spun design adds rigidity
- Welded gas fitting for strength
- Weep holes for drainage

EI MODELS INCLUDE:


Insert: Fully Assembled
Flex Line: Gas Input
Instructions



Penta 31" Electronic Ignition (EI)



24VAC MODELS REQUIRE HPC/SEBCO
24vac, 100W Power Supply pg. 28

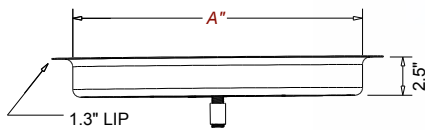

Accessories (Pg. 28):
Timers
Power Supplies
E-Stop



SOLD SEPARATELY:

On/Off Models 120VAC- Remote: 578-C: See Pg. 28
24vac Models: Require a HPC / SEBCO 24vac, 100W Power Supply- see Pg. 28
Vinyl Cover: See Chart on Pg. 67
Lava Rock / Glass: See Chart on Pg. 67



See Pg. 8 for EI System Features

Electronic Ignition Models - EI Series Specifications

Size (A")	Power	Gas type	Model - Flame ON/OFF	Model - Flame Adjustment (HI/LO)	Burner	Max BTU
				HI/LO MODELS COME WITH REMOTE (this column only)		
13"	120vac	Natural Gas	13SSEI-NG/120VAC	13SSEI-HI/LO-NG/120VAC	12" Round	90k
		Liquid Propane	13SSEI-LP/120VAC	13SSEI-HI/LO-LP/120VAC		
* 24vac	Natural Gas	13SSEI-NG/24VAC	13SSEI-HI/LO-NG/24VAC	12" Penta	65k	
	Liquid Propane	13SSEI-LP/24VAC	13SSEI-HI/LO-LP/24VAC			
19"	120vac	Natural Gas	PENTA19EI-NG/120VAC	PENTA19EI-HI/LO-NG/120VAC	18" Penta	125k
		Liquid Propane	PENTA19EI-LP/120VAC	PENTA19EI-HI/LO-LP/120VAC		
* 24vac	Natural Gas	PENTA19EI-NG/24VAC	PENTA19EI-HI/LO-NG/24VAC	30" Penta	250k	
	Liquid Propane	PENTA19EI-LP/24VAC	PENTA19EI-HI/LO-LP/24VAC			
25"	120vac	Natural Gas	PENTA25EI-NG/120VAC	PENTA25EI-HI/LO-NG/120VAC	36" Penta	400k
		Liquid Propane	PENTA25EI-LP/120VAC	PENTA25EI-HI/LO-LP/120VAC		
* 24vac	Natural Gas	PENTA25EI-NG/24VAC	PENTA25EI-HI/LO-NG/24VAC	N/A	N/A	
	Liquid Propane	PENTA25EI-LP/24VAC	PENTA25EI-HI/LO-LP/24VAC			
31"	120vac	Natural Gas	PENTA31EI-NG/120VAC	PENTA31EI-HI/LO-NG/120VAC	N/A	N/A
		Liquid Propane	PENTA31EI-LP/120VAC	PENTA31EI-HI/LO-LP/120VAC		
* 24vac	Natural Gas	PENTA31EI-NG/24VAC	PENTA31EI-HI/LO-NG/24VAC	N/A	N/A	
	Liquid Propane	PENTA31EI-LP/24VAC	PENTA31EI-HI/LO-LP/24VAC			
37"	120vac	Natural Gas	PENTA37EI-NG/120VAC	PENTA37EI-HI/LO-NG/120VAC	N/A	N/A
		Liquid Propane	PENTA37EI-LP/120VAC	PENTA37EI-HI/LO-LP/120VAC		
* 24vac	Natural Gas	PENTA37EI-NG/24VAC	PENTA37EI-HI/LO-NG/24VAC	N/A	N/A	
	Liquid Propane	PENTA37EI-LP/24VAC	PENTA37EI-HI/LO-LP/24VAC			
43"	120vac	Natural Gas	PENTA43EI-NG/120VAC	PENTA43EI-HI/LO-NG/120VAC	N/A	N/A
		Liquid Propane	PENTA43EI-LP/120VAC	PENTA43EI-HI/LO-LP/120VAC		
* 24vac	Natural Gas	PENTA43EI-NG/24VAC	PENTA43EI-HI/LO-NG/24VAC	N/A	N/A	
	Liquid Propane	PENTA43EI-LP/24VAC	PENTA43EI-HI/LO-LP/24VAC			

***IMPORTANT: 24vac Models REQUIRE HPC/SEBCO 24vac, 100W Power Supply pg. 28**

Match proper accessories to your fire pit model - see Pg. 67-70.



Penta 31" Push Button/Flame Sense (FPPK-FLEX)

Penta 25" Match Lit (MLFPK-FLEX)



SOLD SEPARATELY:
 Input Flex Line: SSC-HC24: All models
 Vinyl Cover: See Chart on Pg. 69
 Lava Rock / Glass: See Chart on Pg. 69

FPPK & MLFPK MODELS INCLUDE:
 Insert: Fully Assembled
 Instructions

Accessories:



MLFPK Paver Bracket - Pg. 29



FPPK Mounting Sleeve - Pg. 29

Media Pg. 48
 Outdoor Logs Pg. 50
 Hard Covers Pg. 52

Push Button/Flame Sense Models - FPPK Flex Series Specifications

See Pg. 9 for FPPK System Features

Size (A")	Gas type	Model	Remote Small Tank Model	Burner	Max BTU	* Flex Line
13"	Natural Gas	FPPK13-FLEX-NG		12" Round	90k	36"
	Liquid Propane	FPPK13-FLEX-LP	FPPK13-FLEX-LP-ST			
19"	Natural Gas	PENTA19FPPK-FLEX-NG		12" Penta	65k	36"
	Liquid Propane	PENTA19FPPK-FLEX-LP	PENTA19FPPK-FLEX-LP-ST			
25"	Natural Gas	PENTA25FPPK-FLEX-NG		18" Penta	90k	36"
	Liquid Propane	PENTA25FPPK-FLEX-LP	PENTA25FPPK-FLEX-LP-ST			
31"	Natural Gas	PENTA31FPPK-FLEX-NG		24" Penta	140k	36"
	Liquid Propane	PENTA31FPPK-FLEX-LP				
37"	Natural Gas	PENTA37FPPK-FLEX-NG		30" Penta	140k	36"
	Liquid Propane	PENTA37FPPK-FLEX-LP				

Tank must be 54" from Flame. Includes 24" Flex line, 48" hose and tank adapter.

*Between valve and burner



SOLD SEPARATELY:
 Input Flex Line: SSC24: All models
 Vinyl Cover: See Chart on Pg. 70
 Lava Rock / Glass: See Chart on Pg. 70

Match Lit Models - MLFPK Flex Series Specifications

See Pg. 10 for MLFPK System Features

Size (A")	Gas type	Model	Remote Small Tank Model	Burner	Max BTU	* Flex Line
13"	Natural Gas	PENTA13 MLFPK-FLEX-NG		12" Penta	65k	36"
	Liquid Propane	PENTA13 MLFPK-FLEX-LP	PENTA13 MLFPK-FLEX-LP-ST			
19"	Natural Gas	PENTA19 MLFPK-FLEX-NG		12" Penta	65k	36"
	Liquid Propane	PENTA19 MLFPK-FLEX-LP	PENTA19 MLFPK-FLEX-LP-ST			
25"	Natural Gas	PENTA25 MLFPK-FLEX-NG		18" Penta	65k	36"
	Liquid Propane	PENTA25 MLFPK-FLEX-LP	PENTA25 MLFPK-FLEX-LP-ST			
31"	Natural Gas	PENTA31 MLFPK-FLEX-NG		18" Penta	65k	36"
	Liquid Propane	PENTA31 MLFPK-FLEX-LP	PENTA31 MLFPK-FLEX-LP-ST			

Tank must be 54" from Flame. Includes 24" Flex line, 48" hose and tank adapter.

*Between valve and burner

ROUND INSERT MODELS (CONTINUED)

MAP APPLIES

FULLY ASSEMBLED, COMMERCIAL GRADE, CERTIFIED INSERTS


All fire pit inserts come fully assembled and include installation and operation instructions.

ROUND FLAT INSERTS

Benefits: Economical flat design- used in enclosures that have recess mount and internal sidewalls for media.

Features:

- Made of #304, 18 gauge Stainless Steel
- Raised hub burner for water prevention
- Welded gas fitting for strength
- Weep holes for drainage

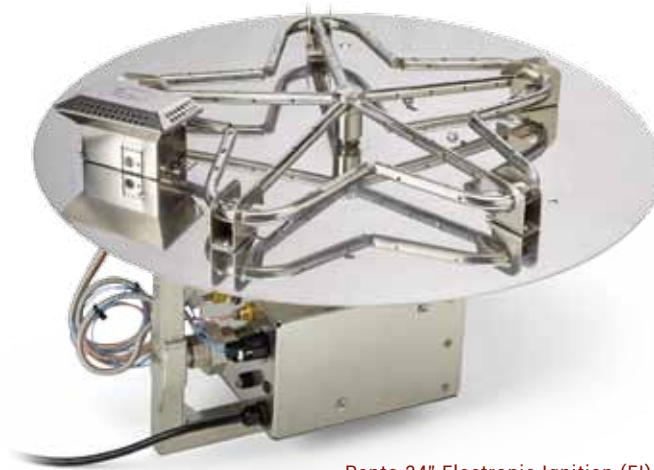


Penta 24" Electronic Ignition (EI)

EI MODELS INCLUDE:
Insert: Fully Assembled
Flex Line: Gas Input
Instructions



24VAC MODELS REQUIRE HPC/SEBCO
24vac, 100W Power Supply pg. 28

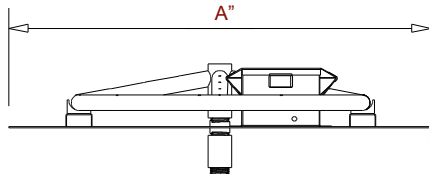

Accessories (Pg. 28):
Timers
Power Supplies
E-Stop



SOLD SEPARATELY:

- On/Off Models 120VAC- Remote: 578-C: See Pg. 28
- 24vac Models: Require a HPC / SEBCO 24vac, 100W Power Supply- see Pg. 28
- Vinyl Cover: See Chart on Pg. 67
- Lava Rock / Glass: See Chart on Pg. 67




See Pg. 8 for EI System Features

Electronic Ignition Models - EI Series Specifications

Size (A")	Power	Gas type	Model - Flame ON/OFF	Model - Flame Adjustment (HI/LO)	Burner	Max BTU
HI/LO MODELS COME WITH REMOTE (this column only)						
14"	120vac	Natural Gas	14FSSEI-NG/120VAC	14FSSEI-HI/LO-NG/120VAC	12" Round	90k
		Liquid Propane	14FSSEI-LP/120VAC	14FSSEI-HI/LO-LP/120VAC		
* 24vac	Natural Gas	14FSSEI-NG/24VAC	14FSSEI-HI/LO-NG/24VAC	12" Penta	90k	
	Liquid Propane	14FSSEI-LP/24VAC	14FSSEI-HI/LO-LP/24VAC			
18"	120vac	Natural Gas	PENTA18EI-NG/120VAC	PENTA18EI-HI/LO-NG/120VAC	12" Penta	65k
		Liquid Propane	PENTA18EI-LP/120VAC	PENTA18EI-HI/LO-LP/120VAC		
* 24vac	Natural Gas	PENTA18EI-NG/24VAC	PENTA18EI-HI/LO-NG/24VAC	18" Penta	125k	
	Liquid Propane	PENTA18EI-LP/24VAC	PENTA18EI-HI/LO-LP/24VAC			
24"	120vac	Natural Gas	PENTA24EI-NG/120VAC	PENTA24EI-HI/LO-NG/120VAC	18" Penta	125k
		Liquid Propane	PENTA24EI-LP/120VAC	PENTA24EI-HI/LO-LP/120VAC		
* 24vac	Natural Gas	PENTA24EI-NG/24VAC	PENTA24EI-HI/LO-NG/24VAC	24" Penta	200k	
	Liquid Propane	PENTA24EI-LP/24VAC	PENTA24EI-HI/LO-LP/24VAC			
30"	120vac	Natural Gas	PENTA30EI-NG/120VAC	PENTA30EI-HI/LO-NG/120VAC	24" Penta	200k
		Liquid Propane	PENTA30EI-LP/120VAC	PENTA30EI-HI/LO-LP/120VAC		
* 24vac	Natural Gas	PENTA30EI-NG/24VAC	PENTA30EI-HI/LO-NG/24VAC	30" Penta	250k	
	Liquid Propane	PENTA30EI-LP/24VAC	PENTA30EI-HI/LO-LP/24VAC			
36"	120vac	Natural Gas	PENTA36EI-NG/120VAC	PENTA36EI-HI/LO-NG/120VAC	30" Penta	250k
		Liquid Propane	PENTA36EI-LP/120VAC	PENTA36EI-HI/LO-LP/120VAC		
* 24vac	Natural Gas	PENTA36EI-NG/24VAC	PENTA36EI-HI/LO-NG/24VAC	36" Penta	400k	
	Liquid Propane	PENTA36EI-LP/24VAC	PENTA36EI-HI/LO-LP/24VAC			
42"	120vac	Natural Gas	PENTA42EI-NG/120VAC	N/A	36" Penta	400k
		Liquid Propane	PENTA42EI-LP/120VAC	N/A		
* 24vac	Natural Gas	PENTA42EI-NG/24VAC	N/A	48" Penta	400k	
	Liquid Propane	PENTA42EI-LP/24VAC	N/A			
54"	120vac	Natural Gas	PENTA54EI-NG/120VAC	N/A	48" Penta	400k
		Liquid Propane	PENTA54EI-LP/120VAC	N/A		
* 24vac	Natural Gas	PENTA54EI-NG/24VAC	N/A	48" Penta	400k	
	Liquid Propane	PENTA54EI-LP/24VAC	N/A			

***IMPORTANT: 24vac Models REQUIRE HPC/SEBCO 24vac, 100W Power Supply pg. 28**

Match proper accessories to your fire pit model - see Pg. 67-70.

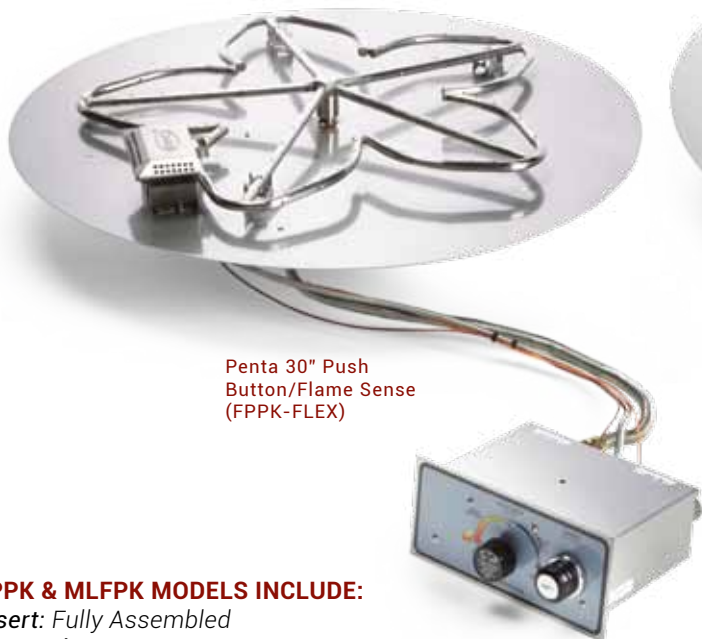

Penta 30" Push Button/Flame Sense (FPPK-FLEX)



Penta 24" Match Lit (MLFPK-FLEX)

FPPK & MLFPK MODELS INCLUDE:

Insert: Fully Assembled Instructions



SOLD SEPARATELY:

Input Flex Line: SSC-HC24: All models

Vinyl Cover: See Chart on Pg. 69

Lava Rock / Glass: See Chart on Pg. 69

Accessories:



Media Pg. 48
Outdoor Logs Pg. 50
Hard Covers Pg. 52

Push Button/Flame Sense Models - FPPK Flex Series Specifications

See Pg. 9 for FPPK System Features

Size	Gas type	Model	Remote Small Tank Model	Burner	Max BTU	* Flex Line
14"	Natural Gas	FPPK14-FLEX-NG		12" Round	90k	36"
	Liquid Propane	FPPK14-FLEX-LP	FPPK14-FLEX-LP-ST			
18"	Natural Gas	PENTA18FPPK-FLEX-NG		12" Penta	65k	36"
	Liquid Propane	PENTA18FPPK-FLEX-LP	PENTA18FPPK-FLEX-LP-ST			
24"	Natural Gas	PENTA24FPPK-FLEX-NG		18" Penta	90k	36"
	Liquid Propane	PENTA24FPPK-FLEX-LP	PENTA24FPPK-FLEX-LP-ST			
30"	Natural Gas	PENTA30FPPK-FLEX-NG		24" Penta	140k	36"
	Liquid Propane	PENTA30FPPK-FLEX-LP				
36"	Natural Gas	PENTA36FPPK-FLEX-NG		30" Penta	140k	36"
	Liquid Propane	PENTA36FPPK-FLEX-LP				

Tank must be 54" from Flame. Includes 24" Flex line, 48" hose and tank adapter.

*Between valve and burner



SOLD SEPARATELY:

Input Flex Line: SSC24: All models

Vinyl Cover: See Chart on Pg. 70

Lava Rock / Glass: See Chart on Pg. 70

Match Lit Models - MLFPK Flex Series Specifications

See Pg. 10 for MLFPK System Features

Size	Gas type	Model	Remote Small Tank Model	Burner	Max BTU	* Flex Line
8"	Natural Gas	MLFPK8-FLEX-NG		6" Round	40k	36"
	Liquid Propane	MLFPK8-FLEX-LP	MLFPK8-FLEX-LP-ST			
14"	Natural Gas	PENTA14 MLFPK-FLEX-NG		12" Penta	65k	36"
	Liquid Propane	PENTA14 MLFPK-FLEX-LP	PENTA14 MLFPK-FLEX-LP-ST			
18"	Natural Gas	PENTA18 MLFPK-FLEX-NG		12" Penta	65k	36"
	Liquid Propane	PENTA18 MLFPK-FLEX-LP	PENTA18 MLFPK-FLEX-LP-ST			
24"	Natural Gas	PENTA24 MLFPK-FLEX-NG		18" Penta	65k	36"
	Liquid Propane	PENTA24 MLFPK-FLEX-LP	PENTA24 MLFPK-FLEX-LP-ST			
30"	Natural Gas	PENTA30 MLFPK-FLEX-NG		18" Penta	65k	36"
	Liquid Propane	PENTA30 MLFPK-FLEX-LP	PENTA30 MLFPK-FLEX-LP-ST			

Tank must be 54" from Flame. Includes 24" Flex line, 48" hose and tank adapter.

*Between valve and burner

Need help? Use our fire pit selector at hpcfire.com

SQUARE INSERT MODELS

FULLY ASSEMBLED, COMMERCIAL GRADE, CERTIFIED INSERTS

All fire pit inserts come fully assembled and include installation and operation instructions.

MAP
APPLIES

SQUARE BOWL INSERTS

Benefits: Sidewall helps with media retention; Pan Lip provides for recessed burner / blowout box...


Features:

- Made of #304, 18 gauge Stainless Steel
- Raised hub burner for water prevention
- Welded gas fitting for strength
- Weep holes for drainage

36" Square Electronic Ignition (EI)



Available
May 2018

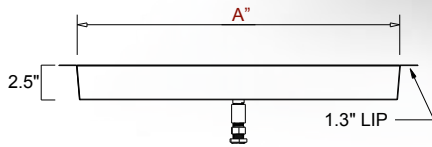

EI MODELS INCLUDE:
Insert: Fully Assembled
Flex Line: Gas Input
Instructions

Accessories (Pg. 28):
Timers
Power Supplies
E-Stop



SOLD SEPARATELY:

- On/Off Models 120VAC- Remote: 578-C: See Pg. 28
- 24vac Models: Require a HPC / SEBCO 24vac, 100W Power Supply- see Pg. 28
- Vinyl Cover: See Chart on Pg. 67
- Lava Rock / Glass: See Chart on Pg. 67



See Pg. 8 for EI System Features

Electronic Ignition Models - EI Series Specifications


Size (A")	Power	Gas type	Model - Flame ON/OFF	Model - Flame Adjustment (HI/LO)	Burner	Max BTU
HI/LO MODELS COME WITH REMOTE (this column only)						
18"	120vac	Natural Gas	18SSEI-SQBL-NG/120VAC	18SSEI-SQBL-HI/LO-NG/120VAC	12" Penta	65k
		Liquid Propane	18SSEI-SQBL-LP/120VAC	18SSEI-SQBL-HI/LO-LP/120VAC		
* 24vac	24vac	Natural Gas	18SSEI-SQBL-NG/24VAC	18SSEI-SQBL-HI/LO-NG/24VAC	★	
		Liquid Propane	18SSEI-SQBL-LP/24VAC	18SSEI-SQBL-HI/LO-LP/24VAC		
24"	120vac	Natural Gas	24SSEI-SQBL-NG/120VAC	24SSEI-SQBL-HI/LO-NG/120VAC	18" Penta	125k
		Liquid Propane	24SSEI-SQBL-LP/120VAC	24SSEI-SQBL-HI/LO-LP/120VAC		
* 24vac	24vac	Natural Gas	24SSEI-SQBL-NG/24VAC	24SSEI-SQBL-HI/LO-NG/24VAC	★	
		Liquid Propane	24SSEI-SQBL-LP/24VAC	24SSEI-SQBL-HI/LO-LP/24VAC		
30"	120vac	Natural Gas	30SSEI-SQBL-NG/120VAC	30SSEI-SQBL-HI/LO-NG/120VAC	24" Penta	200k
		Liquid Propane	30SSEI-SQBL-LP/120VAC	30SSEI-SQBL-HI/LO-LP/120VAC		
* 24vac	24vac	Natural Gas	30SSEI-SQBL-NG/24VAC	30SSEI-SQBL-HI/LO-NG/24VAC	★	
		Liquid Propane	30SSEI-SQBL-LP/24VAC	30SSEI-SQBL-HI/LO-LP/24VAC		
36"	120vac	Natural Gas	36SSEI-SQBL-NG/120VAC	36SSEI-SQBL-HI/LO-NG/120VAC	30" Penta	250k
		Liquid Propane	36SSEI-SQBL-LP/120VAC	36SSEI-SQBL-HI/LO-LP/120VAC		
* 24vac	24vac	Natural Gas	36SSEI-SQBL-NG/24VAC	36SSEI-SQBL-HI/LO-NG/24VAC	★	
		Liquid Propane	36SSEI-SQBL-LP/24VAC	36SSEI-SQBL-HI/LO-LP/24VAC		
42"	120vac	Natural Gas	42SSEI-SQBL-NG/120VAC	N/A	36" Penta	400k
		Liquid Propane	42SSEI-SQBL-LP/120VAC	N/A		
* 24vac	24vac	Natural Gas	42SSEI-SQBL-NG/24VAC	N/A	★	
		Liquid Propane	42SSEI-SQBL-LP/24VAC	N/A		

***IMPORTANT: 24vac Models REQUIRE HPC/SEBCO 24vac, 100W Power Supply pg. 28**

Match proper accessories to your fire pit model - see Pg. 67-70.

Available
May 2018

36" Square Push
Button/Flame Sense
(FPPK-FLEX)

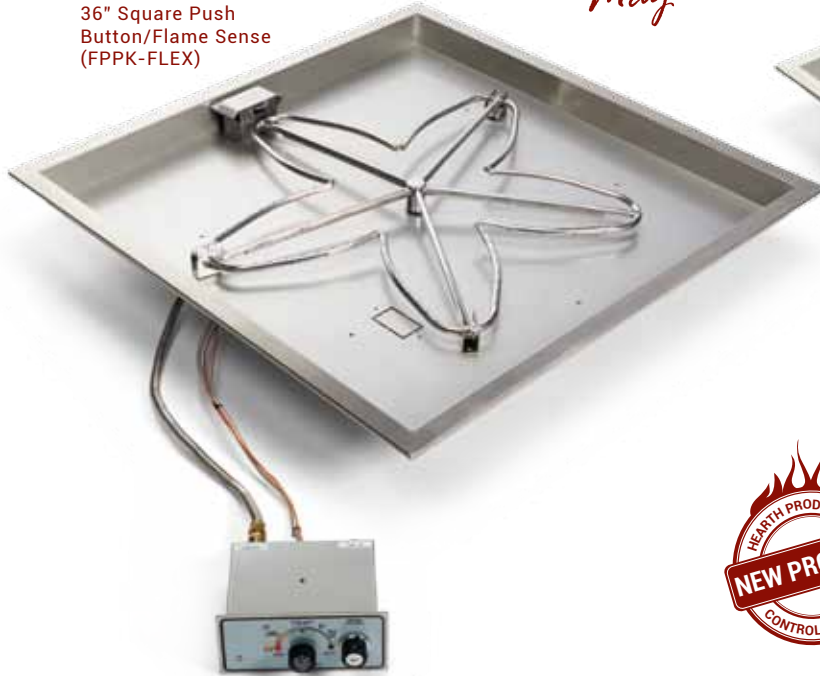

36" Square Match Lit
(MLFPK-FLEX)



FPPK & MLFPK MODELS INCLUDE:

Insert: Fully Assembled
Instructions



SOLD SEPARATELY:

Input Flex Line: SSC-HC24: All models
Vinyl Cover: See Chart on Pg. 69
Lava Rock / Glass: See Chart on Pg. 69

Accessories:



Media Pg. 48
Outdoor Logs Pg. 50
Hard Covers Pg. 52

Push Button/Flame Sense Models - FPPK Flex Series Specifications

See Pg. 9 for FPPK System Features

Size	Gas type	Model	Remote Small Tank Model	Burner	Max BTU	* Flex Line
18"	Natural Gas	FPPK18-SQBL-FLEX-NG		12" Penta	65k	36"
	Liquid Propane	FPPK18-SQBL-FLEX-LP	FPPK18-SQBL-FLEX-LP-ST			
24"	Natural Gas	FPPK24-SQBL-FLEX-NG		18" Penta	90k	36"
	Liquid Propane	FPPK24-SQBL-FLEX-LP	FPPK24-SQBL-FLEX-LP-ST			
30"	Natural Gas	FPPK30-SQBL-FLEX-NG		24" Penta	140k	36"
	Liquid Propane	FPPK30-SQBL-FLEX-LP				
36"	Natural Gas	FPPK36-SQBL-FLEX-NG		30" Penta	140k	36"
	Liquid Propane	FPPK36-SQBL-FLEX-LP				

Tank must be 54" from Flame. Includes 24" Flex line, 48" hose and tank adapter.

*Between valve and burner



SOLD SEPARATELY:

Input Flex Line: SSC24: All models
Vinyl Cover: See Chart on Pg. 70
Lava Rock / Glass: See Chart on Pg. 70

Match Lit Models - MLFPK Flex Series Specifications

See Pg. 10 for MLFPK System Features

Size	Gas type	Model	Remote Small Tank Model	Burner	Max BTU	* Flex Line
18"	Natural Gas	MLFPK18SQBL-FLEX-NG		12" Penta	65k	36"
	Liquid Propane	MLFPK18SQBL-FLEX-LP	MLFPK18SQBL-FLEX-LP-ST			
24"	Natural Gas	MLFPK24SQBL-FLEX-NG		18" Penta	65k	36"
	Liquid Propane	MLFPK24SQBL-FLEX-LP	MLFPK24SQBL-FLEX-LP-ST			
30"	Natural Gas	MLFPK30SQBL-FLEX-NG		18" Penta	65k	36"
	Liquid Propane	MLFPK30SQBL-FLEX-LP	MLFPK30SQBL-FLEX-LP-ST			

Tank must be 54" from Flame. Includes 24" Flex line, 48" hose and tank adapter.

*Between valve and burner

SQUARE INSERT MODELS

FULLY ASSEMBLED, COMMERCIAL GRADE, CERTIFIED INSERTS

All fire pit inserts come fully assembled and include installation and operation instructions.


MAP
APPLIES

SQUARE FLAT INSERTS

Benefits: Economical flat, square design- used in enclosures that have recess mount and internal sidewalls for media.


Features:

- Made of #304, 18 gauge Stainless Steel
- Raised hub burner for water prevention
- Welded gas fitting for strength
- Weep holes for drainage

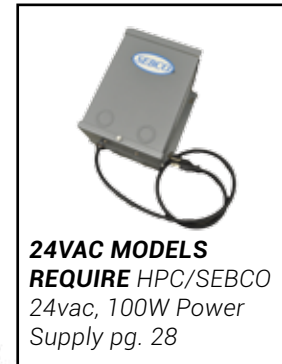

24VAC MODELS REQUIRE HPC/SEBCO 24vac, 100W Power Supply pg. 28

24" Square Electronic Ignition (EI)

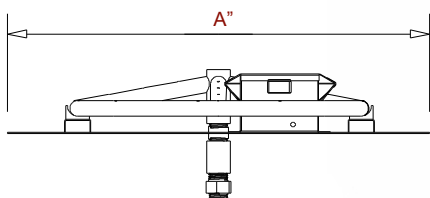

EI MODELS INCLUDE:
Insert: Fully Assembled
Flex Line: Gas Input
Instructions

SOLD SEPARATELY:

- On/Off Models 120VAC- Remote: 578-C: See Pg. 28
- 24vac Models: Require a HPC / SEBCO 24vac, 100W Power Supply- see Pg. 28
- Vinyl Cover: See Chart on Pg. 67
- Lava Rock / Glass: See Chart on Pg. 67

Accessories (Pg. 28):
Timers
Power Supplies
E-Stop



See Pg. 8 for EI System Features

Electronic Ignition Models - EI Series Specifications

Size (A")	Power	Gas type	Model - Flame ON/OFF	Model - Flame Adjustment (HI/LO)	Burner	Max BTU
				HI/LO MODELS COME WITH REMOTE (this column only)		
18"	120vac	Natural Gas	18FSSEI-SQ-NG/120VAC	18FSSEI-SQ-HI/LO-NG/120VAC	12" Penta	65k
		Liquid Propane	18FSSEI-SQ-LP/120VAC	18FSSEI-SQ-HI/LO-LP/120VAC		
* 24vac	Natural Gas	18FSSEI-SQ-NG/24VAC	18FSSEI-SQ-HI/LO-NG/24VAC		18" Penta	125k
	Liquid Propane	18FSSEI-SQ-LP/24VAC	18FSSEI-SQ-HI/LO-LP/24VAC			
24"	120vac	Natural Gas	24FSSEI-SQ-NG/120VAC	24FSSEI-SQ-HI/LO-NG/120VAC	18" Penta	125k
		Liquid Propane	24FSSEI-SQ-LP/120VAC	24FSSEI-SQ-HI/LO-LP/120VAC		
* 24vac	Natural Gas	24FSSEI-SQ-NG/24VAC	24FSSEI-SQ-HI/LO-NG/24VAC		24" Penta	200k
	Liquid Propane	24FSSEI-SQ-LP/24VAC	24FSSEI-SQ-HI/LO-LP/24VAC			
30"	120vac	Natural Gas	30FSSEI-SQ-NG/120VAC	30FSSEI-SQ-HI/LO-NG/120VAC	24" Penta	200k
		Liquid Propane	30FSSEI-SQ-LP/120VAC	30FSSEI-SQ-HI/LO-LP/120VAC		
* 24vac	Natural Gas	30FSSEI-SQ-NG/24VAC	30FSSEI-SQ-HI/LO-NG/24VAC		30" Penta	250k
	Liquid Propane	30FSSEI-SQ-LP/24VAC	30FSSEI-SQ-HI/LO-LP/24VAC			
36"	120vac	Natural Gas	36FSSEI-SQ-NG/120VAC	36FSSEI-SQ-HI/LO-NG/120VAC	30" Penta	250k
		Liquid Propane	36FSSEI-SQ-LP/120VAC	36FSSEI-SQ-HI/LO-LP/120VAC		
* 24vac	Natural Gas	36FSSEI-SQ-NG/24VAC	36FSSEI-SQ-HI/LO-NG/24VAC		36" Penta	400k
	Liquid Propane	36FSSEI-SQ-LP/24VAC	36FSSEI-SQ-HI/LO-LP/24VAC			
42"	120vac	Natural Gas	42FSSEI-SQ-NG/120VAC	N/A	36" Penta	400k
		Liquid Propane	42FSSEI-SQ-LP/120VAC	N/A		
* 24vac	Natural Gas	42FSSEI-SQ-NG/24VAC	42FSSEI-SQ-HI/LO-NG/24VAC	N/A		400k
	Liquid Propane	42FSSEI-SQ-LP/24VAC	42FSSEI-SQ-HI/LO-LP/24VAC	N/A		

***IMPORTANT: 24vac Models REQUIRE HPC/SEBCO 24vac, 100W Power Supply pg. 28**

Match proper accessories to your fire pit model - see Pg. 67-70.



30" Square Push Button/Flame Sense (FPPK-FLEX)

24" Square Match Lit (MLFPK-FLEX)

FPPK & MLFPK MODELS INCLUDE:

Insert: Fully Assembled Instructions



SOLD SEPARATELY:

Input Flex Line: SSC-HC24: All models
 Vinyl Cover: See Chart on Pg. 69
 Lava Rock / Glass: See Chart on Pg. 69

Accessories:



MLFPK Paver Bracket - Pg. 29



FPPK Mounting Sleeve - Pg. 29

Media Pg. 48
 Outdoor Logs Pg. 50
 Hard Covers Pg. 52

Push Button/Flame Sense Models - FPPK Flex Series Specifications

See Pg. 9 for FPPK System Features

Size	Gas type	Model	Remote Small Tank Model	Burner	Max BTU	* Flex Line
18"	Natural Gas	FPPK18-SQ-FLEX-NG		12" Penta	65k	36"
	Liquid Propane	FPPK18-SQ-FLEX-LP	FPPK18-SQ-FLEX-LP-ST			
24"	Natural Gas	FPPK24-SQ-FLEX-NG		18" Penta	90k	36"
	Liquid Propane	FPPK24-SQ-FLEX-LP	FPPK24-SQ-FLEX-LP-ST			
30"	Natural Gas	FPPK30-SQ-FLEX-NG		24" Penta	140k	36"
	Liquid Propane	FPPK30-SQ-FLEX-LP				
36"	Natural Gas	FPPK36-SQ-FLEX-NG		30" Penta	140k	36"
	Liquid Propane	FPPK36-SQ-FLEX-LP				

Tank must be 54" from Flame. Includes 24" Flex line, 48" hose and tank adapter.

*Between valve and burner



SOLD SEPARATELY:

Input Flex Line: SSC24: All models
 Vinyl Cover: See Chart on Pg. 70
 Lava Rock / Glass: See Chart on Pg. 70

Match Lit Models - MLFPK Flex Series Specifications

See Pg. 10 for MLFPK System Features

Size	Gas type	Model	Remote Small Tank Model	Burner	Max BTU	* Flex Line
18"	Natural Gas	MLFPK18SQ-FLEX-NG		12" Penta	65k	36"
	Liquid Propane	MLFPK18SQ-FLEX-LP	MLFPK18SQ-FLEX-LP-ST			
24"	Natural Gas	MLFPK24SQ-FLEX-NG		24" Penta	65k	36"
	Liquid Propane	MLFPK24SQ-FLEX-LP	MLFPK24SQ-FLEX-LP-ST			
30"	Natural Gas	MLFPK30SQ-FLEX-NG		18" Penta	65k	36"
	Liquid Propane	MLFPK30SQ-FLEX-LP	MLFPK30SQ-FLEX-LP-ST			

Tank must be 54" from Flame. Includes 24" Flex line, 48" hose and tank adapter.

*Between valve and burner

RECTANGLE INSERT MODELS

MAP
APPLIES

FULLY ASSEMBLED, COMMERCIAL GRADE, CERTIFIED INSERTS

All fire pit inserts come fully assembled and include installation and operation instructions.

H-BURNER INSERTS


Benefits: Sidewall helps with media retention; Pan Lip provides for recessed burner / blowout box.

Features:



Made of #304, 18 gauge Stainless Steel
Raised hub H-burner for water prevention
Bolted gas fitting for strength
Weep holes for drainage

EI MODELS INCLUDE:

Insert: Fully Assembled
Flex Line: Gas Input
Instructions

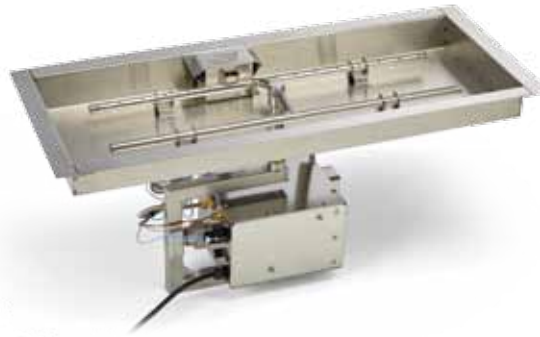

36" X 14" Electronic Ignition (EI)

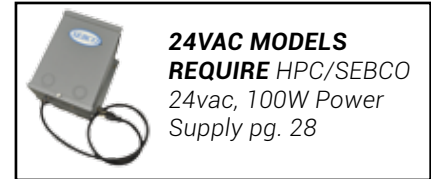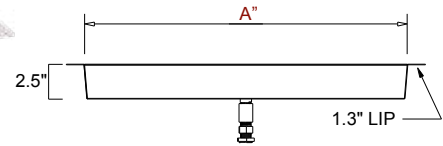

24VAC MODELS REQUIRE HPC/SEBCO
24vac, 100W Power Supply pg. 28

Accessories (Pg. 28):

- Timers
- Power Supplies
- E-Stop



SOLD SEPARATELY:

On/Off Models 120VAC- Remote: 578-C: See Pg. 28
24vac Models: Require a HPC / SEBCO 24vac, 100W Power Supply- see Pg. 28
Vinyl Cover: See Chart on Pg. 67
Lava Rock / Glass: See Chart on Pg. 67



See Pg. 8 for EI System Features

Electronic Ignition Models - EI Series Specifications

Size (A")	Power	Gas type	Model - Flame ON/OFF	Model - Flame Adjustment (HI/LO)	Burner	Max BTU
				HI/LO MODELS COME WITH REMOTE (this column only)		
24" X 12"	120vac	Natural Gas	24X12SSEI-H-NG/120VAC	24X12SSEI-H-HI/LO-NG/120VAC	18" X 6" H-Burner	75k
		Liquid Propane	24X12SSEI-H-LP/120VAC	24X12SSEI-H-HI/LO-LP/120VAC		
* 24vac	Natural Gas	24X12SSEI-H-NG/24VAC	24X12SSEI-H-HI/LO-NG/24VAC	24X12SSEI-H-HI/LO-NG/24VAC	H-Burner	100k
	Liquid Propane	24X12SSEI-H-LP/24VAC	24X12SSEI-H-HI/LO-LP/24VAC	24X12SSEI-H-HI/LO-LP/24VAC		
30" X 12"	120vac	Natural Gas	30X12SSEI-H-NG/120VAC	30X12SSEI-H-HI/LO-NG/120VAC	24" X 6" H-Burner	100k
		Liquid Propane	30X12SSEI-H-LP/120VAC	30X12SSEI-H-HI/LO-LP/120VAC		
* 24vac	Natural Gas	30X12SSEI-H-NG/24VAC	30X12SSEI-H-HI/LO-NG/24VAC	30X12SSEI-H-HI/LO-NG/24VAC	H-Burner	125k
	Liquid Propane	30X12SSEI-H-LP/24VAC	30X12SSEI-H-HI/LO-LP/24VAC	30X12SSEI-H-HI/LO-LP/24VAC		
36" X 14"	120vac	Natural Gas	36X14SSEI-H-NG/120VAC	36X14SSEI-H-HI/LO-NG/120VAC	30" X 8" H-Burner	125k
		Liquid Propane	36X14SSEI-H-LP/120VAC	36X14SSEI-H-HI/LO-LP/120VAC		
* 24vac	Natural Gas	36X14SSEI-H-NG/24VAC	36X14SSEI-H-HI/LO-NG/24VAC	36X14SSEI-H-HI/LO-NG/24VAC	H-Burner	150k
	Liquid Propane	36X14SSEI-H-LP/24VAC	36X14SSEI-H-HI/LO-LP/24VAC	36X14SSEI-H-HI/LO-LP/24VAC		
42" X 14"	120vac	Natural Gas	42X14SSEI-H-NG/120VAC	42X14SSEI-H-HI/LO-NG/120VAC	36" X 8" H-Burner	150k
		Liquid Propane	42X14SSEI-H-LP/120VAC	42X14SSEI-H-HI/LO-LP/120VAC		
* 24vac	Natural Gas	42X14SSEI-H-NG/24VAC	42X14SSEI-H-HI/LO-NG/24VAC	42X14SSEI-H-HI/LO-NG/24VAC	H-Burner	200k
	Liquid Propane	42X14SSEI-H-LP/24VAC	42X14SSEI-H-HI/LO-LP/24VAC	42X14SSEI-H-HI/LO-LP/24VAC		
54" X 16"	120vac	Natural Gas	54X16SSEI-H-NG/120VAC	54X16SSEI-H-HI/LO-NG/120VAC	48" X 10" H-Burner	200k
		Liquid Propane	54X16SSEI-H-LP/120VAC	54X16SSEI-H-HI/LO-LP/120VAC		
* 24vac	Natural Gas	54X16SSEI-H-NG/24VAC	54X16SSEI-H-HI/LO-NG/24VAC	54X16SSEI-H-HI/LO-NG/24VAC	H-Burner	250k
	Liquid Propane	54X16SSEI-H-LP/24VAC	54X16SSEI-H-HI/LO-LP/24VAC	54X16SSEI-H-HI/LO-LP/24VAC		
66" X 16"	120vac	Natural Gas	66X16SSEI-H-NG/120VAC	66X16SSEI-H-HI/LO-NG/120VAC	60" X 10" H-Burner	250k
		Liquid Propane	66X16SSEI-H-LP/120VAC	66X16SSEI-H-HI/LO-LP/120VAC		
* 24vac	Natural Gas	66X16SSEI-H-NG/24VAC	66X16SSEI-H-HI/LO-NG/24VAC	66X16SSEI-H-HI/LO-NG/24VAC	H-Burner	300k
	Liquid Propane	66X16SSEI-H-LP/24VAC	66X16SSEI-H-HI/LO-LP/24VAC	66X16SSEI-H-HI/LO-LP/24VAC		
78" X 16"	120vac	Natural Gas	78X16SSEI-H-NG/120VAC	78X16SSEI-H-HI/LO-NG/120VAC	72" X 10" H-Burner	300k
		Liquid Propane	78X16SSEI-H-LP/120VAC	78X16SSEI-H-HI/LO-LP/120VAC		
* 24vac	Natural Gas	78X16SSEI-H-NG/24VAC	78X16SSEI-H-HI/LO-NG/24VAC	78X16SSEI-H-HI/LO-NG/24VAC	H-Burner	350k
	Liquid Propane	78X16SSEI-H-LP/24VAC	78X16SSEI-H-HI/LO-LP/24VAC	78X16SSEI-H-HI/LO-LP/24VAC		
90" X 16"	120vac	Natural Gas	90X16SSEI-H-NG/120VAC	NA	84" X 10" H-Burner	350k
		Liquid Propane	90X16SSEI-H-LP/120VAC	NA		
* 24vac	Natural Gas	90X16SSEI-H-NG/24VAC	90X16SSEI-H-NG/24VAC	NA	H-Burner	350k
	Liquid Propane	90X16SSEI-H-LP/24VAC	90X16SSEI-H-LP/24VAC	NA		

***IMPORTANT: 24vac Models REQUIRE HPC/SEBCO 24vac, 100W Power Supply pg. 28**

Match proper accessories to your fire pit model - see Pg. 67-70.



42" X 14" Push Button/Flame Sense (FPPK-FLEX)

30" X 12" Match Lit (MLFPK-FLEX)



SOLD SEPARATELY:
 Input Flex Line: SSC-HC24: All models
 Vinyl Cover: See Chart on Pg. 69
 Lava Rock / Glass: See Chart on Pg. 69

FPPK & MLFPK MODELS INCLUDE:
 Insert: Fully Assembled Instructions

Accessories:



Media Pg. 48
 Outdoor Logs Pg. 50
 Hard Covers Pg. 52

Push Button/Flame Sense Models - FPPK Flex Series Specifications

See Pg. 9 for FPPK System Features

Size	Gas type	Model	Remote Small Tank Model	Burner	Max BTU	* Flex Line
24" X 12"	Natural Gas	FPPK24X12-H-FLEX-NG		18" X 6"	75k	36"
	Liquid Propane	FPPK24X12-H-FLEX-LP	FPPK24X12-H-FLEX-LP-ST	H Burner		
30" X 12"	Natural Gas	FPPK30X12-H-FLEX-NG		24" X 6"	90k	36"
	Liquid Propane	FPPK30X12-H-FLEX-LP	FPPK30X12-H-FLEX-LP-ST	H burner		
36" X 14"	Natural Gas	FPPK36X14-H-FLEX-NG		30" X 8"	90k	36"
	Liquid Propane	FPPK36X14-H-FLEX-LP	FPPK36X14-H-FLEX-LP-ST	H Burner		
42" X 14"	Natural Gas	FPPK42X14-H-FLEX-NG		36" X 8"	140k	36"
	Liquid Propane	FPPK42X14-H-FLEX-LP		H Burner		
54" X 16"	Natural Gas	FPPK54X16-H-FLEX-NG		48" X 10"	140k	36"
	Liquid Propane	FPPK54X16-H-FLEX-LP		H Burner		

Tank must be 54" from Flame. Includes 24" Flex line, 48" hose and tank adapter.

*Between valve and burner



SOLD SEPARATELY:
 Input Flex Line: SSC24: All models
 Vinyl Cover: See Chart on Pg. 70
 Lava Rock / Glass: See Chart on Pg. 70

Match Lit Models - MLFPK Flex Series Specifications

See Pg. 10 for MLFPK System Features

Size	Gas type	Model	Remote Small Tank Model	Burner	Max BTU	* Flex Line
24" X 12"	Natural Gas	MLFPK24X12-H-FLEX-NG		18" X 6"	65k	36"
	Liquid Propane	MLFPK24X12-H-FLEX-LP	MLFPK24X12-H-FLEX-LP-ST	H Burner		
30" X 12"	Natural Gas	MLFPK30X12-H-FLEX-NG		24" X 6"	65k	36"
	Liquid Propane	MLFPK30X12-H-FLEX-LP	MLFPK30X12-H-FLEX-LP-ST	H Burner		
36" X 14"	Natural Gas	MLFPK36X14-H-FLEX-NG		30" X 8"	65k	36"
	Liquid Propane	MLFPK36X14-H-FLEX-LP	MLFPK36X14-H-FLEX-LP-ST	H Burner		

Tank must be 54" from Flame. Includes 24" Flex line, 48" hose and tank adapter.

*Between valve and burner

RECTANGLE INSERT MODELS (CONTINUED)

MAP
APPLIES

FULLY ASSEMBLED, COMMERCIAL GRADE, CERTIFIED INSERTS

All fire pit inserts come fully assembled and include installation and operation instructions.


S-FIRE BURNER INSERTS

Benefits: Sidewall helps with media retention; Pan Lip provides for recessed burner / blowout box.

Features:

Made of #304, 18 gauge Stainless Steel
Raised hub S-Fire burner for water prevention
Bolted gas fitting for strength
Weep holes for drainage

EI MODELS INCLUDE:
Insert: Fully Assembled
Flex Line: Gas Input
Instructions

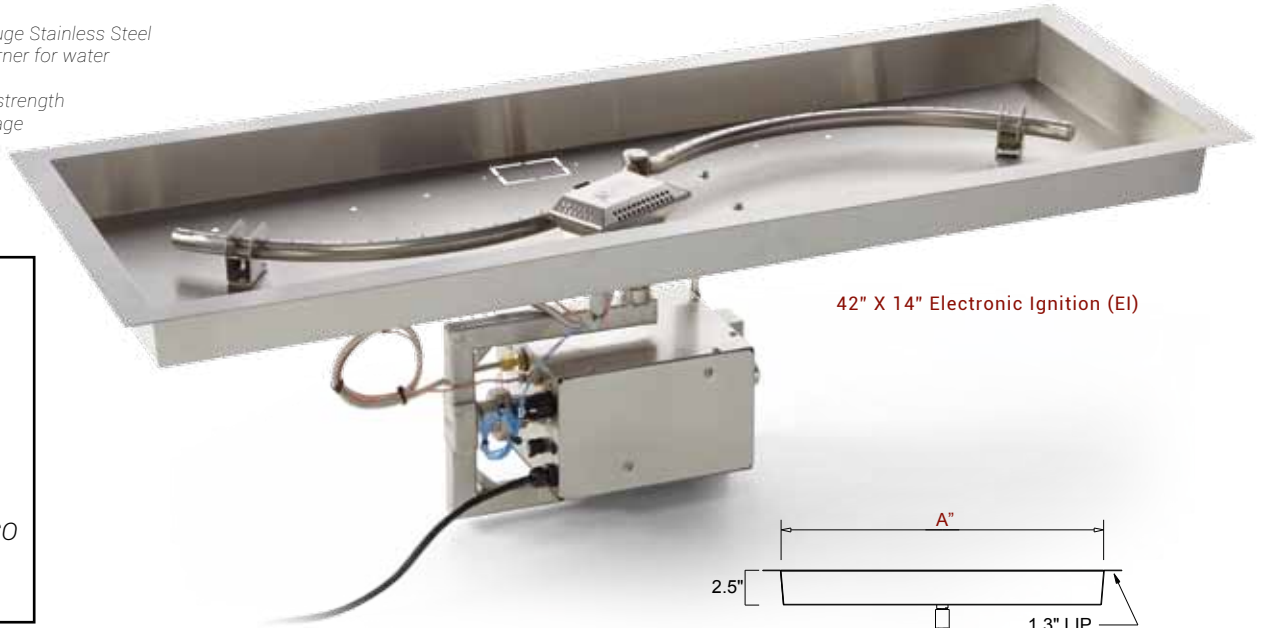

42" X 14" Electronic Ignition (EI)



24VAC MODELS REQUIRE HPC/SEBCO
24vac, 100W Power Supply pg. 28

SOLD SEPARATELY:

On/Off Models 120VAC- Remote: 578-C: See Pg. 28
24vac Models: Require a HPC / SEBCO 24vac, 100W Power Supply- see Pg. 28
Vinyl Cover: See Chart on Pg. 67
Lava Rock / Glass: See Chart on Pg. 67

Accessories (Pg. 28):
Timers
Power Supplies
E-Stop



See Pg. 8 for EI System Features

Electronic Ignition Models - EI Series Specifications

Size (A")	Power	Gas type	Model - Flame ON/OFF	Model - Flame Adjustment (HI/LO)	Burner	Max BTU
				HI/LO MODELS COME WITH REMOTE (this column only)		
36" X 14"	120vac	Natural Gas	36X14SSEI-S-NG/120VAC	36X14SSEI-S-HI/LO-NG/120VAC	30" X 8" S-Fire	75k
		Liquid Propane	36X14SSEI-S-LP/120VAC	36X14SSEI-S-HI/LO-LP/120VAC		
* 24vac	120vac	Natural Gas	36X14SSEI-S-NG/24VAC	36X14SSEI-S-HI/LO-NG/24VAC		85k
		Liquid Propane	36X14SSEI-S-LP/24VAC	36X14SSEI-S-HI/LO-LP/24VAC		
42" X 14"	120vac	Natural Gas	42X14SSEI-S-NG/120VAC	42X14SSEI-S-HI/LO-NG/120VAC	36" X 8" S-Fire	85k
		Liquid Propane	42X14SSEI-S-LP/120VAC	42X14SSEI-S-HI/LO-LP/120VAC		
* 24vac	120vac	Natural Gas	42X14SSEI-S-NG/24VAC	42X14SSEI-S-HI/LO-NG/24VAC		110k
		Liquid Propane	42X14SSEI-S-LP/24VAC	42X14SSEI-S-HI/LO-LP/24VAC		
54" X 16"	120vac	Natural Gas	54X16SSEI-S-NG/120VAC	54X16SSEI-S-HI/LO-NG/120VAC	48" X 10" S-Fire	110k
		Liquid Propane	54X16SSEI-S-LP/120VAC	54X16SSEI-S-HI/LO-LP/120VAC		
* 24vac	120vac	Natural Gas	54X16SSEI-S-NG/24VAC	54X16SSEI-S-HI/LO-NG/24VAC		135k
		Liquid Propane	54X16SSEI-S-LP/24VAC	54X16SSEI-S-HI/LO-LP/24VAC		
66" X 16"	120vac	Natural Gas	66X16SSEI-S-NG/120VAC	66X16SSEI-S-HI/LO-NG/120VAC	60" X 10" S-Fire	135k
		Liquid Propane	66X16SSEI-S-LP/120VAC	66X16SSEI-S-HI/LO-LP/120VAC		
* 24vac	120vac	Natural Gas	66X16SSEI-S-NG/24VAC	66X16SSEI-S-HI/LO-NG/24VAC		165k
		Liquid Propane	66X16SSEI-S-LP/24VAC	66X16SSEI-S-HI/LO-LP/24VAC		
78" X 16"	120vac	Natural Gas	78X16SSEI-S-NG/120VAC	78X16SSEI-S-HI/LO-NG/120VAC	72" X 10" S-Fire	165k
		Liquid Propane	78X16SSEI-S-LP/120VAC	78X16SSEI-S-HI/LO-LP/120VAC		
* 24vac	120vac	Natural Gas	78X16SSEI-S-NG/24VAC	78X16SSEI-S-HI/LO-NG/24VAC		165k
		Liquid Propane	78X16SSEI-S-LP/24VAC	78X16SSEI-S-HI/LO-LP/24VAC		

***IMPORTANT: 24vac Models REQUIRE HPC/SEBCO 24vac, 100W Power Supply pg. 28**

Match proper accessories to your fire pit model - see Pg. 67-70.



36" X 14" Match Lit
(MLFPK-FLEX)



36" X 14" Push Button/Flame
Sense (FPPK-FLEX)

Accessories:



MLFPK
Paver
Bracket -
Pg. 29



FPPK Mounting
Sleeve - Pg. 29

Media Pg. 48
Outdoor Logs Pg. 50
Hard Covers Pg. 52



SOLD SEPARATELY:

Input Flex Line: SSC-HC24: All models
Vinyl Cover: See Chart on Pg. 69
Lava Rock / Glass: See Chart on Pg. 69

FPPK & MLFPK MODELS INCLUDE:

Insert: Fully Assembled
Instructions

Push Button/Flame Sense Models - FPPK Flex Series Specifications

See Pg. 9 for FPPK System Features

Size	Gas type	Model	Remote Small Tank Model	Burner	Max BTU	* Flex Line
36" X 14"	Natural Gas	FPPK36X14-S-FLEX-NG		30" X 8" S-Fire	75k	36"
	Liquid Propane	FPPK36X14-S-FLEX-LP	FPPK36X14-S-FLEX-LP-ST	S-Fire		
42" X 14"	Natural Gas	FPPK42X14-S-FLEX-NG		36" X 8" S-Fire	90k	36"
	Liquid Propane	FPPK42X14-S-FLEX-LP	FPPK42X14-S-FLEX-LP-ST	S-Fire		
54" X 16"	Natural Gas	FPPK54X16-S-FLEX-NG		48" X 10" S-Fire	140k	36"
	Liquid Propane	FPPK54X16-S-FLEX-LP				

Tank must be 54" from Flame. Includes 24" Flex line, 48" hose and tank adapter.

*Between valve and burner



SOLD SEPARATELY:

Input Flex Line: SSC24: All models
Vinyl Cover: See Chart on Pg. 70
Lava Rock / Glass: See Chart on Pg. 70

See Pg. 10 for MLFPK System Features

Match Lit Models - MLFPK Flex Series Specifications

Size	Gas type	Model	Remote Small Tank Model	Burner	Max BTU	* Flex Line
36" X 14"	Natural Gas	MLFPK36X14-S-FLEX-NG		30" X 8" S-Fire	65k	36"
	Liquid Propane	MLFPK36X14-S-FLEX-LP	MLFPK36X14-S-FLEX-LP-ST	S-Fire		

Tank must be 54" from Flame. Includes 24" Flex line, 48" hose and tank adapter.

*Between valve and burner

LINEAR INSERT MODELS

**MAP
APPLIES**

FULLY ASSEMBLED, COMMERCIAL GRADE, CERTIFIED INSERTS




All fire pit inserts come fully assembled and include installation and operation instructions.

LINEAR TROUGH INSERTS

The trough pan was introduced to industry by HPC in 2008- it is still a popular model with our Dealers.

EI MODELS INCLUDE:

*Insert: Fully Assembled
Flex Line: Gas Input
Instructions*

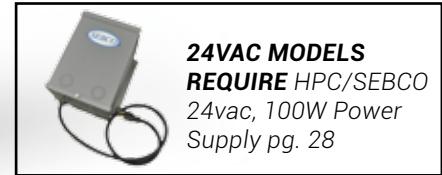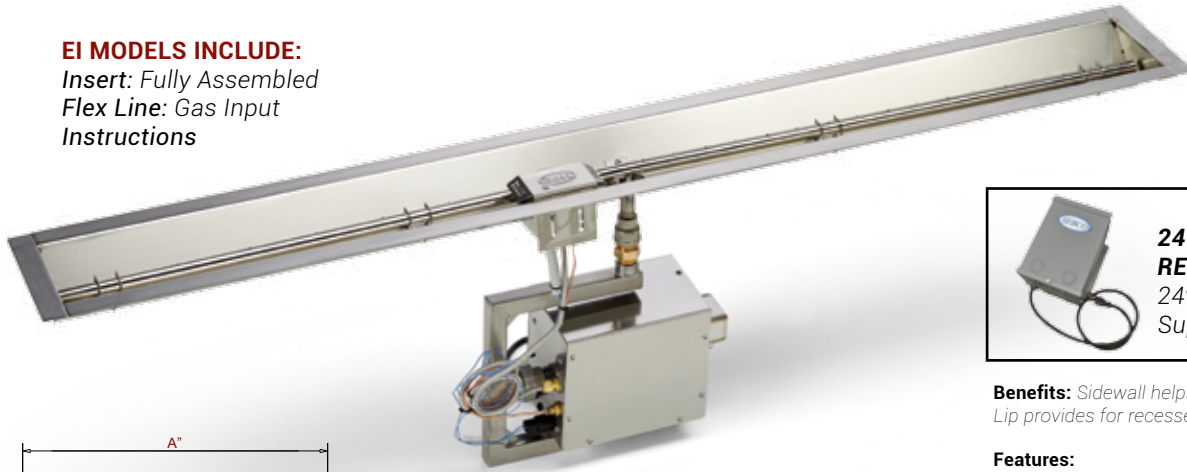


**24VAC MODELS
REQUIRE HPC/SEBCO**
24vac, 100W Power
Supply pg. 28

Benefits: Sidewall helps with media retention; Pan Lip provides for recessed burner / blowout box.

Features:
Made of #304 Stainless Steel (48" and smaller- 18g, 60" and larger- 16g)
Sidewalls adds rigidity- stronger than flat pans
Weep holes for drainage

60" Electronic Ignition (EI)

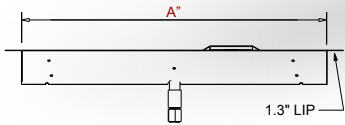

SOLD SEPARATELY:

On/Off Models 120VAC- Remote: 578-C: See Pg. 28

24vac Models: Require a HPC / SEBCO 24vac, 100W Power Supply- see Pg. 28

Vinyl Cover: See Chart on Pg. 67

Lava Rock / Glass: See Chart on Pg. 67

Accessories (Pg. 28):
Timers
Power Supplies
E-Stop



**See Pg. 8 for EI
System Features**

Electronic Ignition Models - EI Series Specifications

Size (A")	Power	Gas type	Model - Flame ON/OFF	Model - Flame Adjustment (HI/LO)	Burner	Max BTU
				HI/LO MODELS COME WITH REMOTE (this column only)		
24"	120vac	Natural Gas	24SSEI-TRGH-NG/120VAC	24SSEI-TRGH-HI/LO-NG/120VAC	24"	50k
		Liquid Propane	24SSEI-TRGH-LP/120VAC	24SSEI-TRGH-HI/LO-LP/120VAC		
* 24vac	Natural Gas	24SSEI-TRGH-NG/24VAC	24SSEI-TRGH-HI/LO-NG/24VAC	T-Burner		
	Liquid Propane	24SSEI-TRGH-LP/24VAC	24SSEI-TRGH-HI/LO-LP/24VAC			
36"	120vac	Natural Gas	36SSEI-TRGH-NG/120VAC	36SSEI-TRGH-HI/LO-NG/120VAC	36"	75k
		Liquid Propane	36SSEI-TRGH-LP/120VAC	36SSEI-TRGH-HI/LO-LP/120VAC		
* 24vac	Natural Gas	36SSEI-TRGH-NG/24VAC	36SSEI-TRGH-HI/LO-NG/24VAC	T-Burner		
	Liquid Propane	36SSEI-TRGH-LP/24VAC	36SSEI-TRGH-HI/LO-LP/24VAC			
48"	120vac	Natural Gas	48SSEI-TRGH-NG/120VAC	48SSEI-TRGH-HI/LO-NG/120VAC	48"	100k
		Liquid Propane	48SSEI-TRGH-LP/120VAC	48SSEI-TRGH-HI/LO-LP/120VAC		
* 24vac	Natural Gas	48SSEI-TRGH-NG/24VAC	48SSEI-TRGH-HI/LO-NG/24VAC	T-Burner		
	Liquid Propane	48SSEI-TRGH-LP/24VAC	48SSEI-TRGH-HI/LO-LP/24VAC			
60"	120vac	Natural Gas	60SSEI-TRGH-NG/120VAC	60SSEI-TRGH-HI/LO-NG/120VAC	60"	125k
		Liquid Propane	60SSEI-TRGH-LP/120VAC	60SSEI-TRGH-HI/LO-LP/120VAC		
* 24vac	Natural Gas	60SSEI-TRGH-NG/24VAC	60SSEI-TRGH-HI/LO-NG/24VAC	T-Burner		
	Liquid Propane	60SSEI-TRGH-LP/24VAC	60SSEI-TRGH-HI/LO-LP/24VAC			
72"	120vac	Natural Gas	72SSEI-TRGH-NG/120VAC	72SSEI-TRGH-HI/LO-NG/120VAC	72"	150k
		Liquid Propane	72SSEI-TRGH-LP/120VAC	72SSEI-TRGH-HI/LO-LP/120VAC		
* 24vac	Natural Gas	72SSEI-TRGH-NG/24VAC	72SSEI-TRGH-HI/LO-NG/24VAC	T-Burner		
	Liquid Propane	72SSEI-TRGH-LP/24VAC	72SSEI-TRGH-HI/LO-LP/24VAC			
96"	120vac	Natural Gas	96SSEI-TRGH-NG/120VAC	96SSEI-TRGH-HI/LO-NG/120VAC	96"	200k
		Liquid Propane	96SSEI-TRGH-LP/120VAC	96SSEI-TRGH-HI/LO-LP/120VAC		
* 24vac	Natural Gas	96SSEI-TRGH-NG/24VAC	96SSEI-TRGH-HI/LO-NG/24VAC	T-Burner		
	Liquid Propane	96SSEI-TRGH-LP/24VAC	96SSEI-TRGH-HI/LO-LP/24VAC			

***IMPORTANT: 24vac Models REQUIRE HPC/SEBCO 24vac, 100W Power Supply pg. 28**

**Match proper accessories to your
fire pit model - see Pg. 67-70.**



Current Design



New Design



HPC is currently phasing out the V-style trough as inventories are depleted- we are replacing with a new design. All dimensions for both types are the same (L,W & H).



36" Match Lit (MLFPK-FLEX)



60" Push Button/Flame Sense (FPPK-FLEX)

Accessories:



MLFPK Paver Bracket - Pg. 29



FPPK Mounting Sleeve - Pg. 29

Media Pg. 48
Outdoor Logs Pg. 50
Hard Covers Pg. 52



C US

SOLD SEPARATELY:

Input Flex Line: SSC-HC24: All models

Vinyl Cover: See Chart on Pg. 69

Lava Rock / Glass: See Chart on Pg. 69

FPPK & MLFPK MODELS INCLUDE:

Insert: Fully Assembled

Instructions

Push Button/Flame Sense Models - FPPK Flex Series Specifications

See Pg. 9 for FPPK System Features

Size	Gas type	Model	Remote Small Tank Model	Burner	Max BTU	* Flex Line
24"	Natural Gas	FPPK24-TRGH-FLEX-NG		24" T-Burner	50k	36"
	Liquid Propane	FPPK24-TRGH-FLEX-LP	FPPK24-TRGH-FLEX-LP-ST			
36"	Natural Gas	FPPK36-TRGH-FLEX-NG		36" T-Burner	75k	36"
	Liquid Propane	FPPK36-TRGH-FLEX-LP	FPPK36-TRGH-FLEX-LP-ST			
48"	Natural Gas	FPPK48-TRGH-FLEX-NG		48" T-Burner	90k	36"
	Liquid Propane	FPPK48-TRGH-FLEX-LP	FPPK48-TRGH-FLEX-LP-ST			
60"	Natural Gas	FPPK60-TRGH-FLEX-NG		60" T-Burner	90k	36"
	Liquid Propane	FPPK60-TRGH-FLEX-LP	FPPK60-TRGH-FLEX-LP-ST			
72"	Natural Gas	FPPK72-TRGH-FLEX-NG		72" T-Burner	140k	36"
	Liquid Propane	FPPK72-TRGH-FLEX-LP				
96"	Natural Gas	FPPK96-TRGH-FLEX-NG		96" T-Burner	140k	36"
	Liquid Propane	FPPK96-TRGH-FLEX-LP				

Tank must be 54" from Flame. Includes 24" Flex line, 48" hose and tank adapter.

*Between valve and burner

SOLD SEPARATELY:

Input Flex Line: SSC24: All models

Vinyl Cover: See Chart on Pg. 70

Lava Rock / Glass: See Chart on Pg. 70



C US

Match Lit Models - MLFPK Flex Series Specifications

See Pg. 10 for MLFPK System Features

Size	Gas type	Model	Remote Small Tank Model	Burner	Max BTU	* Flex Line
24"	Natural Gas	MLFPK24 TRGH-FLEX-NG		24" T-Burner	50k	36"
	Liquid Propane	MLFPK24 TRGH-FLEX-LP	MLFPK24 TRGH-FLEX-LP-ST			
36"	Natural Gas	MLFPK36 TRGH-FLEX-NG		36" T-Burner	65k	36"
	Liquid Propane	MLFPK36 TRGH-FLEX-LP	MLFPK36 TRGH-FLEX-LP-ST			
48"	Natural Gas	MLFPK48 TRGH-FLEX-NG		48" T-Burner	65k	36"
	Liquid Propane	MLFPK48 TRGH-FLEX-LP	MLFPK48 TRGH-FLEX-LP-ST			

Tank must be 54" from Flame. Includes 24" Flex line, 48" hose and tank adapter.

*Between valve and burner

LINEAR INSERT MODELS (CONTINUED)

**MAP
APPLIES**


FULLY ASSEMBLED, COMMERCIAL GRADE, CERTIFIED INSERTS

All fire pit inserts come fully assembled and include installation and operation instructions.

LINEAR INTERLINK PAN INSERTS

EI MODELS INCLUDE:

Insert: Fully Assembled
Flex Line: Gas Input
Instructions

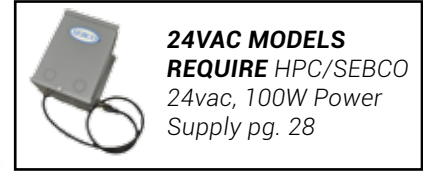


**24VAC MODELS
REQUIRE HPC/SEBCO**
24vac, 100W Power
Supply pg. 28

Benefits: Partial sidewall for media retention; used in enclosures that have recess mount of insert.

Features:

Made of #304, 18 gauge Stainless Steel
Sidewalls adds rigidity- stronger than flat pans
Removable center section on larger models
Raised hub T-Burner for water prevention
Secure gas fitting for strength
Weep holes for drainage

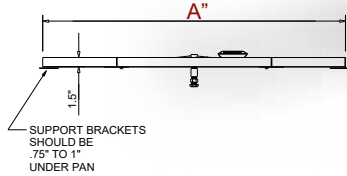


61" X 8" Electronic Ignition (EI)

SOLD SEPARATELY:

On/Off Models 120VAC- Remote: 578-C: See Pg. 28
24vac Models: Require a HPC / SEBCO 24vac, 100W Power Supply- see Pg. 28
Vinyl Cover: See Chart on Pg. 67
Lava Rock / Glass: See Chart on Pg. 67

Accessories (Pg. 28):

Timers
Power Supplies
E-Stop



Electronic Ignition Models - EI Series Specifications




**See Pg. 8 for
EI System Features**

Size (A')	Power	Gas type	Model - Flame ON/OFF	Model - Flame Adjustment (HI/LO)	Burner	Max BTU
				HI/LO MODELS COME WITH REMOTE (this column only)		
25" X 8"	120vac	Natural Gas	25X8SSEI-L-NG/120VAC	25X8SSEI-L-HI/LO-NG/120VAC	24" T-Burner	50k
		Liquid Propane	25X8SSEI-L-LP/120VAC	25X8SSEI-L-HI/LO-LP/120VAC		
* 24vac	Natural Gas	25X8SSEI-L-NG/24VAC	25X8SSEI-L-HI/LO-NG/24VAC	36" T-Burner	75k	
	Liquid Propane	25X8SSEI-L-LP/24VAC	25X8SSEI-L-HI/LO-LP/24VAC			
37" X 8"	120vac	Natural Gas	37X8SSEI-L-NG/120VAC	37X8SSEI-L-HI/LO-NG/120VAC	48" T-Burner	100k
		Liquid Propane	37X8SSEI-L-LP/120VAC	37X8SSEI-L-HI/LO-LP/120VAC		
* 24vac	Natural Gas	37X8SSEI-L-NG/24VAC	37X8SSEI-L-HI/LO-NG/24VAC	60" T-Burner	125k	
	Liquid Propane	37X8SSEI-L-LP/24VAC	37X8SSEI-L-HI/LO-LP/24VAC			
49" X 8"	120vac	Natural Gas	49X8SSEI-L-NG/120VAC	49X8SSEI-L-HI/LO-NG/120VAC	72" T-Burner	150k
		Liquid Propane	49X8SSEI-L-LP/120VAC	49X8SSEI-L-HI/LO-LP/120VAC		
* 24vac	Natural Gas	49X8SSEI-L-NG/24VAC	49X8SSEI-L-HI/LO-NG/24VAC	96" T-Burner	200k	
	Liquid Propane	49X8SSEI-L-LP/24VAC	49X8SSEI-L-HI/LO-LP/24VAC			
61" X 8"	120vac	Natural Gas	61X8SSEI-L-NG/120VAC	61X8SSEI-L-HI/LO-NG/120VAC	120" T-Burner	250k
		Liquid Propane	61X8SSEI-L-LP/120VAC	61X8SSEI-L-HI/LO-LP/120VAC		
* 24vac	Natural Gas	61X8SSEI-L-NG/24VAC	61X8SSEI-L-HI/LO-NG/24VAC			
	Liquid Propane	61X8SSEI-L-LP/24VAC	61X8SSEI-L-HI/LO-LP/24VAC			
73 X 8"	120vac	Natural Gas	73X8SSEI-L-NG/120VAC	73X8SSEI-L-HI/LO-NG/120VAC		
		Liquid Propane	73X8SSEI-L-LP/120VAC	73X8SSEI-L-HI/LO-LP/120VAC		
* 24vac	Natural Gas	73X8SSEI-L-NG/24VAC	73X8SSEI-L-HI/LO-NG/24VAC			
	Liquid Propane	73X8SSEI-L-LP/24VAC	73X8SSEI-L-HI/LO-LP/24VAC			
97 X 8"	120vac	Natural Gas	97X8SSEI-L-NG/120VAC	97X8SSEI-L-HI/LO-NG/120VAC		
		Liquid Propane	97X8SSEI-L-LP/120VAC	97X8SSEI-L-HI/LO-LP/120VAC		
* 24vac	Natural Gas	97X8SSEI-L-NG/24VAC	97X8SSEI-L-HI/LO-NG/24VAC			
	Liquid Propane	97X8SSEI-L-LP/24VAC	97X8SSEI-L-HI/LO-LP/24VAC			
121 X 8"	120vac	Natural Gas	121X8SSEI-L-NG/120VAC	121X8SSEI-L-HI/LO-NG/120VAC		
		Liquid Propane	121X8SSEI-L-LP/120VAC	121X8SSEI-L-HI/LO-LP/120VAC		
* 24vac	Natural Gas	121X8SSEI-L-NG/24VAC	121X8SSEI-L-HI/LO-NG/24VAC			
	Liquid Propane	121X8SSEI-L-LP/24VAC	121X8SSEI-L-HI/LO-LP/24VAC			

***IMPORTANT: 24vac Models REQUIRE HPC/SEBCO 24vac, 100W Power Supply pg. 28**

**Match proper accessories to your
fire pit model - see Pg. 67-70.**

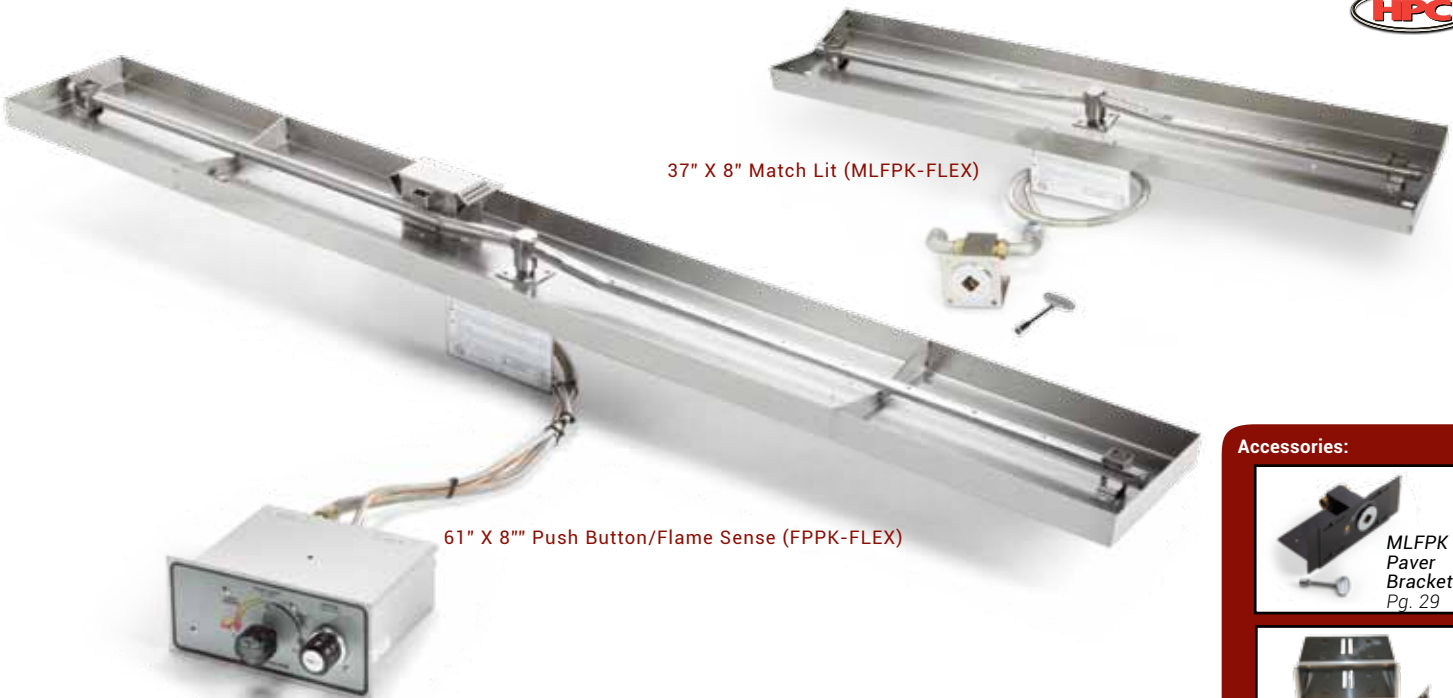

37" X 8" Match Lit (MLFPK-FLEX)

61" X 8" Push Button/Flame Sense (FPPK-FLEX)

Accessories:



Media Pg. 48
Outdoor Logs Pg. 50
Hard Covers Pg. 52



SOLD SEPARATELY:

Input Flex Line: SSC-HC24: All models
Vinyl Cover: See Chart on Pg. 69
Lava Rock / Glass: See Chart on Pg. 69

FPPK & MLFPK MODELS INCLUDE:

Insert: Fully Assembled
Instructions

Push Button/Flame Sense Models - FPPK Flex Series Specifications

See Pg. 9 for FPPK System Features

Size	Gas type	Model	Remote Small Tank Model	Burner	Max BTU	* Flex Line
25" X 8"	Natural Gas	FPPK25X8-L-FLEX-NG		24" T-Burner	50k	36"
	Liquid Propane	FPPK25X8-L-FLEX-LP	FPPK25X8-L-FLEX-LP-ST			
37" X 8"	Natural Gas	FPPK37X8-L-FLEX-NG		36" T-Burner	75k	36"
	Liquid Propane	FPPK37X8-L-FLEX-LP	FPPK37X8-L-FLEX-LP-ST			
49" X 8"	Natural Gas	FPPK49X8-L-FLEX-NG		48" T-Burner	90k	36"
	Liquid Propane	FPPK49X8-L-FLEX-LP	FPPK49X8-L-FLEX-LP-ST			
61" X 8"	Natural Gas	FPPK61X8-L-FLEX-NG		60" T-Burner	90k	36"
	Liquid Propane	FPPK61X8-L-FLEX-LP	FPPK61X8-L-FLEX-LP-ST			
73" X 8"	Natural Gas	FPPK73X8-L-FLEX-NG		72" T-Burner	140k	36"
	Liquid Propane	FPPK73X8-L-FLEX-LP				
97" X 8"	Natural Gas	FPPK97X8-L-FLEX-NG		96" T-Burner	140k	36"
	Liquid Propane	FPPK97X8-L-FLEX-LP				

Tank must be 54" from Flame. Includes 24" Flex line, 48" hose and tank adapter.

*Between valve and burner



SOLD SEPARATELY:

Input Flex Line: SSC24: All models
Vinyl Cover: See Chart on Pg. 70
Lava Rock / Glass: See Chart on Pg. 70

Match Lit Models - MLFPK Flex Series Specifications

See Pg. 10 for MLFPK System Features

Size	Gas type	Model	Remote Small Tank Model	Burner	Max BTU	* Flex Line
25" X 8"	Natural Gas	MLFPK25X8-L-FLEX-NG		24" T-Burner	50k	36"
	Liquid Propane	MLFPK25X8-L-FLEX-LP	MLFPK25X8-L-FLEX-LP-ST			
37" X 8"	Natural Gas	MLFPK37X8-L-FLEX-NG		36" T-Burner	65k	36"
	Liquid Propane	MLFPK37X8-L-FLEX-LP	MLFPK37X8-L-FLEX-LP-ST			
49" X 8"	Natural Gas	MLFPK49X8-L-FLEX-NG		48" T-Burner	65k	36"
	Liquid Propane	MLFPK49X8-L-FLEX-LP	MLFPK49X8-L-FLEX-LP-ST			

Tank must be 54" from Flame. Includes 24" Flex line, 48" hose and tank adapter.

*Between valve and burner

CONTROL OPTIONS

ELECTRONIC IGNITION MODELS (EI)

COMMERCIAL AUTOMATIC SHUTOFF TIMERS - 120VAC



694
2 Hour Timer
Stainless Steel Rotary Timer (SPDT, 20A)
1/2" deep. Double gang box recommended.
For use with NEMA 3R box for mounting.

695
12 Hour Timer



694 NEMA
2 Hour Timer
695 NEMA
12 Hour Timer
NEMA 3R Box with 694 or 695 timer
Includes timer mounted into the NEMA 3R
box for your convenience.



696
Four preset switch for indoors.
Can be set at 2, 4, 8, and 12 hours (SPDT, 20A)
Fits single Gangbox

POWER SUPPLIES - FOR 24VAC MODELS

Input Primary - 120VAC, 60/50Hz, 1A max
Output Secondary - 24VAC, 60/50Hz, 4A



Model	Style
311-PS1	1 Output
311-PS3	3 Outputs
311-PS5	5 Outputs

COMMERCIAL EMERGENCY STOP - 120VAC OR 24VAC

Perfect for commercial applications of Evolution 360 or EI systems. Push button with keyed reset allows supervisor confirmation. Safely turns off up to 3 circuits plus one fail safe function.



For replacement Keys
use product number:
E-STOP-KEY

311-ESTOP-3
Size: 2.8" x 2.8" x 4", Rated for 600VA, 10A
Rated IP65 - Protection against dust and
low pressure water from all directions.

120 VAC OUTDOOR ON/OFF REMOTE CONTROL



578-C


Used with EI Fire Pit Systems. 120 VAC models only. CARLON in-line power control with 3 prong in/out.

DECK INSULATION KIT (EI, FPPK & MLFPK)

This kit is for use when installing a gas fire pit on a wood or composite deck- provides flame and excess heat protection around input flex line connection(s). This basalt insulation is for inside the fire pit enclosure or bowl, is meant to place over a layer of paver blocks (1" min. thickness) commonly found at your local builder's store. Incoming gas stub must protrude through the deck, paver blocks and insulation for fire pit flex line connection. Kit includes basalt insulation and instructions- basalt insulation measures 39.3" x 39.3" (1 sq. meter)- larger fire pits will require more pieces, insulation is easily cut with utility knife. Smaller bowl kit available.

FPI-DECK20SQ - For fire bowls
includes basalt insulation- 19.6" x 19.6"

FPI-DECK39SQ - For fire pits-
includes basalt insulation- 39.3" x 39.3" (1 sq. meter).

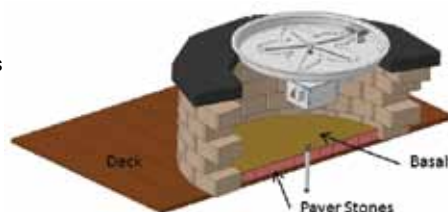

PUSH BUTTON / FLAME SENSE MODELS (FPPK)



FPPK CONTROL BOX MOUNTING SLEEVE

This stainless steel sleeve can be mortared in place with block or fastened to stone or metal - adjustable support bracket included. (7.75"W x 3.25"H x 6.25"D)

FPPK-VBMS




MATCH LIT MODELS (MLFPK)

PAVER BLOCK BRACKET

Designed for the Dante Valve, this bracket allows flexibility and installation ease of the MLFPK decorative key valve. The face plate is adjustable from 8" to 12" width accommodating most pavers. The valve is securely mounted to bracket using decorative flange. (8-12"W x 3.875H x 5"D)

IMPORTANT: For use only with DANTE Valve #327-CH (Pg. 62)

KVMB-PB

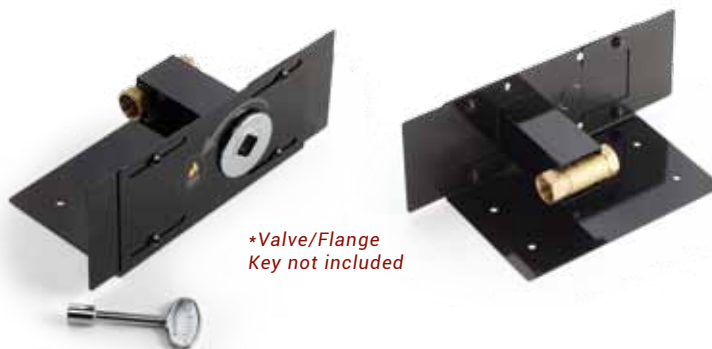

*Valve/Flange
Key not included

REPLACEMENT SMALL TANK KIT - LP (FPPK & MLFPK)

This kit is for use with CSA certified FPPK and MLFPK fire pit models less than 90k Btu- see fire pit insert section for approved models. The kits includes a 90-degree regulator with 48" hose, 24" Flex Line, small tank L-Bracket and fittings for FPPK or MLFPK connection.

For use with CSA Certified FPPK & MLFPK fire pit inserts only

STLPK



PUSH BUTTON IGNITION KITS (FPK SERIES)

UNASSEMBLED - NON-CERTIFIED

MAP APPLIES

*This hard pipe unassembled kit include stainless steel pan and burner, push button ignition switch and igniter, chrome decorative key valve, fittings and flex line. **Natural Gas Only** (Not certified).*

ROUND BOWL INSERTS / NON CERTIFIED

Size	Gas type	Model	Burner	Max BTU
19"	Natural Gas	PENTA19FPK-NG	12" Penta	90k
25"	Natural Gas	PENTA25FPK-NG	18" Penta	150k
31"	Natural Gas	PENTA31FPK-NG	24" Penta	150k

ROUND FLAT INSERTS

Size	Gas type	Model	Burner	Max BTU
18"	Natural Gas	PENTA18FPK-NG	12" Penta	90k
24"	Natural Gas	PENTA24FPK-NG	18" Penta	150k
30"	Natural Gas	PENTA30FPK-NG	24" Penta	150k

SQUARE FLAT INSERTS

Size	Gas type	Model	Burner	Max BTU
18"	Natural Gas	PENTA18FPK-SQ-NG	12" Penta	90k
24"	Natural Gas	PENTA24FPK-SQ-NG	18" Penta	150k
30"	Natural Gas	PENTA30FPK-SQ-NG	24" Penta	150k



Push Button Ignition

MATCH LIT KITS - FPS FLEX LINE SERIES

UNASSEMBLED - NOT CERTIFIED

Includes everything you need to put together a match lit fire pit. Includes burner, a valve with polished chrome flange, flex line and fittings.

PENTA BURNER KITS- STAINLESS STEEL (#304)

Size	Gas Type	Model	Hub Size	Btu	Valve Size	Flex Line
12"	Natural Gas	FPS/PENTA12 KIT	1/2"	65k	1/2"	18"
	Liquid Propane	FPS/PENTA12LP KIT				
18"	Natural Gas	FPS/PENTA18 KIT	1/2"	125k	1/2"	18"
	Liquid Propane	FPS/PENTA18LP KIT				
24"	Natural Gas	FPS/PENTA24 KIT	1/2"	200k	1/2"	18"
	Liquid Propane	FPS/PENTA24LP KIT				
30"	Natural Gas	FPS/PENTA30 KIT	3/4"	250k	3/4"	24"
	Liquid Propane	FPS/PENTA30LP KIT				
36"	Natural Gas	FPS/PENTA36 KIT	3/4"	300k	3/4"	24"
	Liquid Propane	FPS/PENTA36LP KIT				
48"	Natural Gas	FPS/PENTA48 KIT	3/4"	300k	3/4"	24"
	Liquid Propane	FPS/PENTA48LP KIT				

Features:

Burner Ports - 12 and 3 o'clock
Raised Hub Design
Patented Technology

Penta Burner




See Pg. 11 for Penta Burner Features



ROUND BURNER KITS- STAINLESS STEEL (#304)

Size	Gas Type	Model	Hub Size	Btu	Valve Size	Flex Line
6"	Natural Gas	FPS6 KIT	1/2"	60k	1/2"	18"
	Liquid Propane	FPS6LP KIT				
12"	Natural Gas	FPS12 KIT	1/2"	90k	1/2"	18"
	Liquid Propane	FPS12LP KIT				
18"	Natural Gas	FPS18 KIT	1/2"	150k	1/2"	18"
	Liquid Propane	FPS18LP KIT				
24"	Natural Gas	FPS24 KIT	1/2"	150k	1/2"	18"
	Liquid Propane	FPS24LP KIT				
24" (HC)	Natural Gas	FPS24HC KIT	3/4"	300k	3/4"	18"
	Liquid Propane	FPS24HCLP KIT				
30"	Natural Gas	FPS30 KIT	1/2"	300k	1/2"	24"
	Liquid Propane	FPS30LP KIT				
30" (HC)	Natural Gas	FPS30HC KIT	3/4"	300k	3/4"	24"
	Liquid Propane	FPS30HCLP KIT				
36"	Natural Gas	FPS36HC KIT	3/4"	300k	3/4"	24"
	Liquid Propane	FPS36HCLP KIT				
48"	Natural Gas	FPS48HC KIT	3/4"	300k	3/4"	24"
	Liquid Propane	FPS48HCLP KIT				

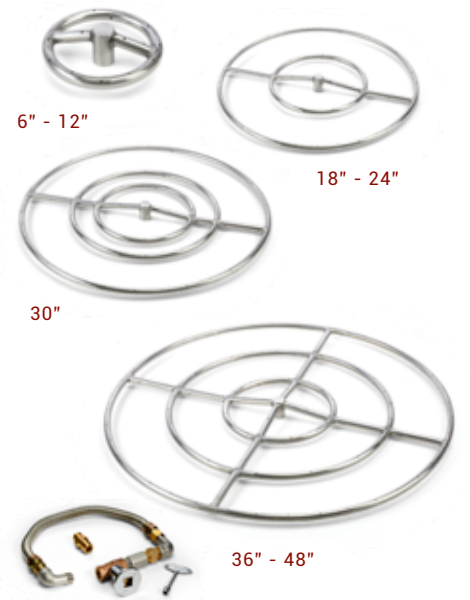

Features:


Burner Ports - Staggered
Raised Hub Design



Photo Courtesy of Stonewall Design & Construction - Pennsylvania

SQUARE BURNER KITS- STAINLESS STEEL (#304)

Size	Gas Type	Model	Hub Size	Btu	Valve Size	Flex Line
12"	Natural Gas	FPSSQ12 KIT	1/2"	90k	1/2"	18"
	Liquid Propane	FPSSQ12LP KIT				
18"	Natural Gas	FPSSQ18 KIT	1/2"	150k	1/2"	18"
	Liquid Propane	FPSSQ18LP KIT				
24"	Natural Gas	FPSSQ24 KIT	1/2"	150k	1/2"	18"
	Liquid Propane	FPSSQ24LP KIT				
36"	Natural Gas	FPSSQ36HC KIT	3/4"	300k	3/4"	24"
	Liquid Propane	FPSSQ36HCLP KIT				
48"	Natural Gas	FPSSQ48HC KIT	3/4"	300k	3/4"	24"
	Liquid Propane	FPSSQ48HCLP KIT				

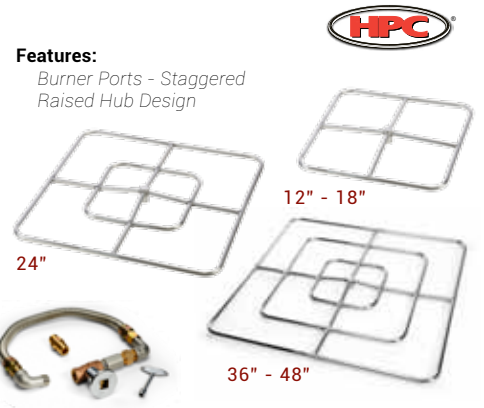


RECTANGLE BURNER KITS- STAINLESS STEEL (#304)

Size	Gas Type	Model	Hub Size	Btu	Valve Size	Flex Line
12"x 6"	Natural Gas	FPSR12X6 KIT	1/2"	90k	1/2"	18"
	Liquid Propane	FPSR12X6LP KIT				
18"x 9"	Natural Gas	FPSR18X9 KIT	1/2"	150k	1/2"	18"
	Liquid Propane	FPSR18X9LP KIT				
24"x 12"	Natural Gas	FPSR24X12 KIT	1/2"	150k	1/2"	18"
	Liquid Propane	FPSR24X12LP KIT				
36"x 18"	Natural Gas	FPSR36X18 KIT	1/2"	200k	1/2"	18"
	Liquid Propane	FPSR36X18LP KIT				
48"x 24"	Natural Gas	FPSR48X24HC KIT	3/4"	300k	3/4"	24"
	Liquid Propane	FPSR48X24HCLP KIT				




LINEAR BURNER KITS- INTERLINK PAN & T-BURNER, STAINLESS STEEL (#304)

Size (A")	Gas Type	Model	Hub Size	Btu	Valve Size	Flex Line
25"X 8"	Natural Gas	FPS/LINEAR25X8 KIT	1/2"	50k	1/2"	18"
	Liquid Propane	FPS/LINEAR25X8-LP				
37"X 8"	Natural Gas	FPS/LINEAR37X8 KIT	1/2"	75k	1/2"	18"
	Liquid Propane	FPS/LINEAR37X8-LP				
49"X 8"	Natural Gas	FPS/LINEAR49X8 KIT	1/2"	100k	1/2"	18"
	Liquid Propane	FPS/LINEAR49X8-LP				
61"X 8"	Natural Gas	FPS/LINEAR61X8 KIT	1/2"	125k	1/2"	18"
	Liquid Propane	FPS/LINEAR61X8-LP				
73"X 8"	Natural Gas	FPS/LINEAR73X8 KIT	1/2"	150k	1/2"	18"
	Liquid Propane	FPS/LINEAR73X8-LP				
97"X 8"	Natural Gas	FPS/LINEAR97X8 KIT	1/2"	200k	1/2"	18"
	Liquid Propane	FPS/LINEAR97X8-LP				
121"X 8"	Natural Gas	FPS/LINEAR121X8 KIT	1/2"	250k	1/2"	18"
	Liquid Propane	FPS/LINEAR121X8-LP				

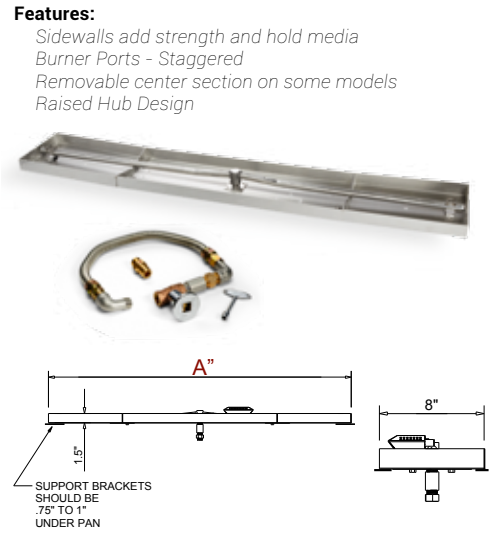

LINEAR BURNER KITS- TROUGH PAN & T-BURNER STAINLESS STEEL (#304)

Size (A")	Gas Type	Model	Hub Size	Btu	Valve Size	Flex Line
24"	Natural Gas	FPS/TRGH24 KIT	1/2"	50k	1/2"	18"
	Liquid Propane	FPS/TRGH24-LP				
36"	Natural Gas	FPS/TRGH36 KIT	1/2"	75k	1/2"	18"
	Liquid Propane	FPS/TRGH36-LP				
48"	Natural Gas	FPS/TRGH48 KIT	1/2"	100k	1/2"	18"
	Liquid Propane	FPS/TRGH48-LP				
60"	Natural Gas	FPS/TRGH60 KIT	1/2"	125k	1/2"	18"
	Liquid Propane	FPS/TRGH60-LP				
72"	Natural Gas	FPS/TRGH72 KIT	1/2"	150k	1/2"	18"
	Liquid Propane	FPS/TRGH72-LP				
96"	Natural Gas	FPS/TRGH96 KIT	1/2"	200k	1/2"	18"
	Liquid Propane	FPS/TRGH96-LP				

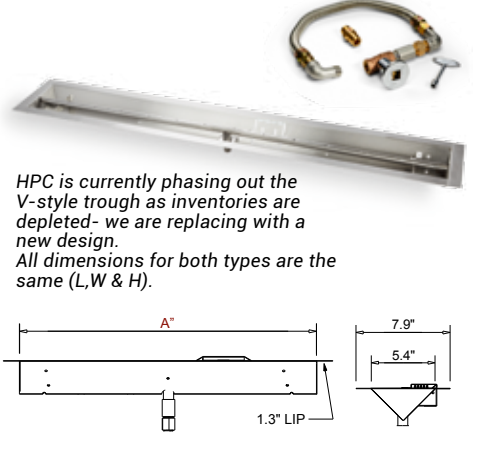

MATCH LIT KITS - FPS FLEX LINE SERIES (CONTINUED)

UNASSEMBLED - NOT CERTIFIED


Includes everything you need to put together a match lit fire pit. Includes burner, a valve with polished chrome flange, flex line and fittings.

S-FIRE BURNER KITS- STAINLESS STEEL (#304)

Size	Gas Type	Model	Hub Size	Btu	Valve Size	Flex Line
30"x 8"	Natural Gas	FPS/SFIRE30 KIT	1/2"	65k	1/2"	18"
	Liquid Propane	FPS/SFIRE30LP KIT				
36"x 8"	Natural Gas	FPS/SFIRE36 KIT	1/2"	85k	1/2"	18"
	Liquid Propane	FPS/SFIRE36LP KIT				
48"x 10"	Natural Gas	FPS/SFIRE48 KIT	1/2"	110k	1/2"	18"
	Liquid Propane	FPS/SFIRE48LP KIT				
60"x 10"	Natural Gas	FPS/SFIRE60 KIT	1/2"	150k	1/2"	18"
	Liquid Propane	FPS/SFIRE60LP KIT				
72"x 10"	Natural Gas	FPS/SFIRE72 KIT	1/2"	150k	1/2"	18"
	Liquid Propane	FPS/SFIRE72LP KIT				

Features:

Burner Ports - Small Separation for Distinctive S-Pattern Flame
Raised Hub Design

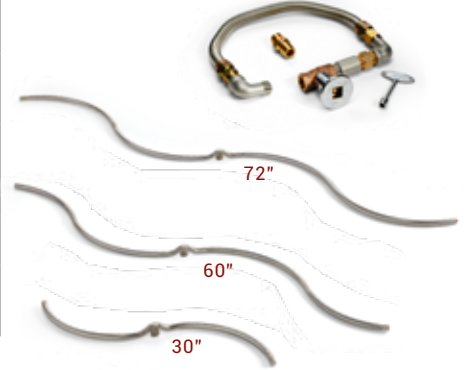


H-BURNER KITS- STAINLESS STEEL (#304)

Size	Gas Type	Model	Hub Size	Btu	Valve Size	Flex Line
18"x 6"	Natural Gas	FPS/HBSB18 KIT	1/2"	60k	1/2"	18"
	Liquid Propane	FPS/HBSB18LP KIT				
24"x 6"	Natural Gas	FPS/HBSB24 KIT	1/2"	90k	1/2"	18"
	Liquid Propane	FPS/HBSB24LP KIT				
30"x 8"	Natural Gas	FPS/HBSB30 KIT	1/2"	90k	1/2"	18"
	Liquid Propane	FPS/HBSB30LP KIT				
36"x 8"	Natural Gas	FPS/HBSB36 KIT	1/2"	150k	1/2"	18"
	Liquid Propane	FPS/HBSB36LP KIT				
48"x 10"	Natural Gas	FPS/HBSB48 KIT	1/2"	150k	1/2"	18"
	Liquid Propane	FPS/HBSB48LP KIT				
60"x 10"	Natural Gas	FPS/HBSB60 KIT	1/2"	250k	1/2"	18"
	Liquid Propane	FPS/HBSB60LP KIT				
72"x 10"	Natural Gas	FPS/HBSB72 KIT	1/2"	300k	1/2"	18"
	Liquid Propane	FPS/HBSB72LP KIT				
84"x 10"	Natural Gas	FPS/HBSB84 KIT	1/2"	300k	1/2"	18"
	Liquid Propane	FPS/HBSB84LP KIT				


Features:

Burner Ports - Point Inward
Raised Hub Design

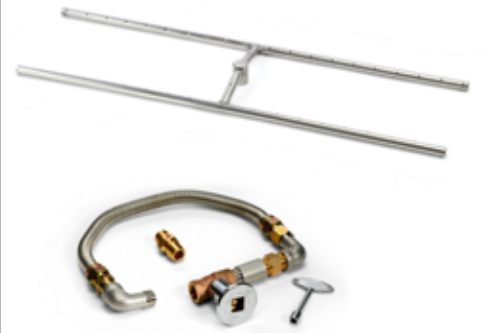

ROUND BURNERS- COLD ROLLED STEEL (BLACK)

Size	Gas Type	Model	Hub Size	Btu	Valve Size	Flex Line
12"	Natural Gas	FP12 KIT	1/2"	90k	1/2"	18"
	Liquid Propane	FP12LP KIT				
18"	Natural Gas	FP18 KIT	1/2"	150k	1/2"	18"
	Liquid Propane	FP18LP KIT				
24"	Natural Gas	FP24 KIT	1/2"	150k	1/2"	18"
	Liquid Propane	FP24LP KIT				
30"	Natural Gas	FP30 KIT	1/2"	300k	1/2"	24"
	Liquid Propane	FP30LP KIT				
36"	Natural Gas	FP36 KIT	1/2"	300k	1/2"	24"
	Liquid Propane	FP36LP KIT				

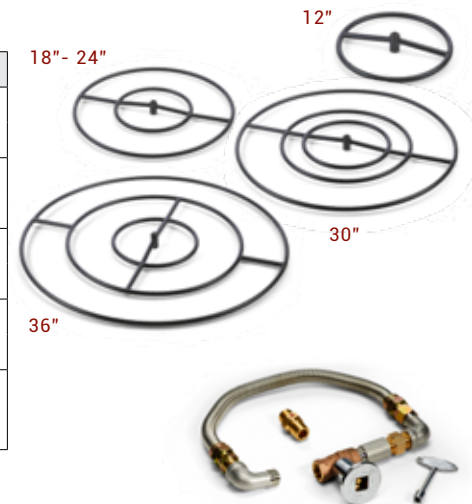

READY TO FINISH SERIES

COMPLETE FIRE PIT PACKAGES

HPC offers complete fire pit packages that include unfinished enclosures fitted with a certified remote electronic ignition (EI), push button/flame sense (FPPK) or match lit (MLFPK) fire pit insert.


MAP APPLIES

READY TO FINISH


These units are unfinished to allow the customer to finish with stone, veneer, or stucco to match their surrounding. Units are available in round, octagon, square, and linear shapes. Housings take the guess work out of enclosure construction - especially with the difficult round and octagon shapes. These are 18" tall and are constructed of sturdy 22 gauge galvanized steel material, welded frame, and a 1/2" hardboard shell, and weigh 150 lbs.

Enclosure ships from North Carolina Warehouse on pallet; Fire Pit ships from Ohio Warehouse.

ROUND ENCLOSURE

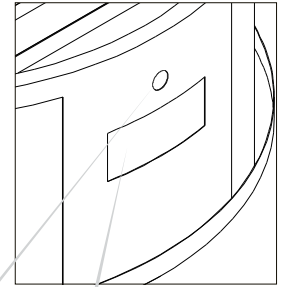

Frame is pre-cut for FPPK or MLFPK.

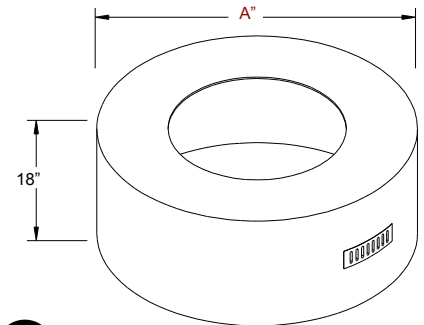

EI Models Include: Enclosure, Fully Assembled Insert, Input Flex Line and Instructions





FPPK Models Include: Enclosure, Fully Assembled Insert, Mounting Sleeve and Instructions

MLFPK Models Include: Enclosure, Fully Assembled Insert and Instructions



Size: 45" or 54" diameter, 18" tall
Insert: 25" Bowl Pan, 18" Penta Burner

Specifications

Ignition	Size (A")	Power	Gas type	Model	Max BTU	Insert		
Electronic Ignition 	45"	120VAC	Natural Gas	U45R/25SSCEK-NG/120VAC	125k	 Pg. 12		
		24VAC	Natural Gas	U45R/25SSCEK-LP/120VAC				
	54"	120VAC	Natural Gas	U54R/25SSCEK-NG/120VAC	125k			
		24VAC	Natural Gas	U54R/25SSCEK-LP/120VAC				
	45"			Natural Gas	U45R/FPPK25CEK-NG		90k	 Pg. 13
				Liquid Propane	U45R/FPPK25CEK-LP			
54"			Natural Gas	U54R/FPPK25CEK-NG	90k			
			Liquid Propane	U54R/FPPK25CEK-LP				
45"			Natural Gas	U45R/MLFPK25CEK-NG	65k	 Pg. 13		
			Liquid Propane	U45R/MLFPK25CEK-LP				
54"			Natural Gas	U54R/MLFPK25CEK-NG	65k			
			Liquid Propane	U54R/MLFPK25CEK-LP				

READY TO FINISH SERIES (CONTINUED)

MAP APPLIES

COMPLETE FIRE PIT PACKAGES


HPC offers complete fire pit packages that include unfinished enclosures fitted with a certified remote electronic ignition (EI), push button/flame sense (FPPK) or match lit (MLFPK) fire pit insert.

READY TO FINISH


These units are unfinished to allow the customer to finish with stone, veneer, or stucco to match their surrounding. Units are available in round, octagon, square, and linear shapes. Housings take the guess work out of enclosure construction - especially with the difficult round and octagon shapes. These are 18" tall and are constructed of sturdy 22 gauge galvanized steel material, welded frame, and a 1/2" hardboard shell, and weigh 150 lbs.

Enclosure ships from North Carolina Warehouse on pallet; Fire Pit ships from Ohio Warehouse.

OCTAGON ENCLOSURE

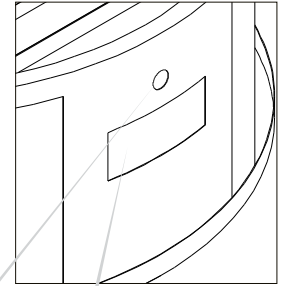

Frame is pre-cut for FPPK or MLFPK.

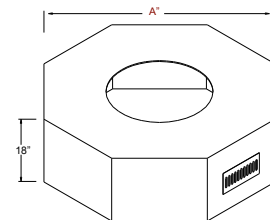

EI Models Include: Enclosure, Fully Assembled Insert, Input Flex Line and Instructions







FPPK Models Include: Enclosure, Fully Assembled Insert, Mounting Sleeve and Instructions

MLFPK Models Include: Enclosure, Fully Assembled Insert and Instructions



Size: 45" or 54" diameter, 18" tall
Insert: 25" Bowl Pan, 18" Penta Burner

Specifications

Ignition	Size (A")	Power	Gas type	Model	Max BTU	Insert
 Electronic Ignition	45"	120VAC	Natural Gas	U450/25SSCEK-NG/120VAC	125k	
		24VAC	Natural Gas	U450/25SSCEK-NG/24VAC		
	54"	120VAC	Natural Gas	U540/25SSCEK-NG/120VAC	125k	
		24VAC	Natural Gas	U540/25SSCEK-NG/24VAC		
 Push Button- Flame Sense	45"		Natural Gas	U450/FPPK25CEK-NG	90k	
	54"		Natural Gas	U540/FPPK25CEK-NG	90k	
			Liquid Propane	U540/FPPK25CEK-LP		
 Match Lit	45"		Natural Gas	U450/MLFPK25CEK-NG	65k	
	54"		Natural Gas	U540/MLFPK25CEK-NG	65k	
			Liquid Propane	U540/MLFPK25CEK-LP		

Pg. 12

Pg. 13


Pg. 13




Fire features add a natural gathering spot no matter where they are installed.

Photo Courtesy of Lawn Innovations - Ohio

RECTANGLE BURNER ENCLOSURE - INTERLINK BURNER INSERT

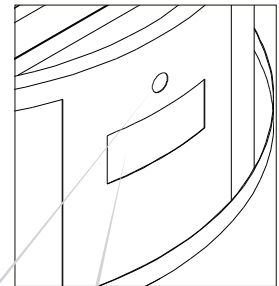

Frame is pre-cut for FPPK or MLFPK.

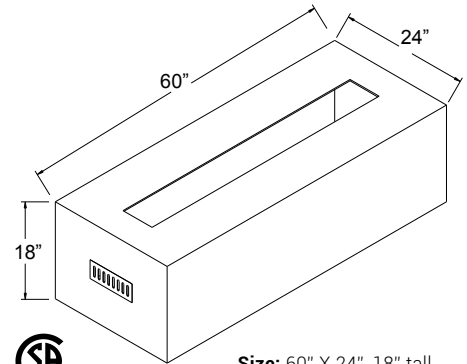







Size: 60" X 24", 18" tall
Insert: 37" X 8" or 49" X 8"

EI Models Include: Enclosure, Fully Assembled Insert, Input Flex Line and Instructions

FPPK Models Include: Enclosure, Fully Assembled Insert, Mounting Sleeve and Instructions

MLFPK Models Include: Enclosure, Fully Assembled Insert and Instructions

Specifications

Ignition	Insert	Power	Gas type	Model	Max BTU	Insert
Electronic Ignition 	37" X 8"	120VAC	Natural Gas Liquid Propane	U60X24/37X8CEK-NG/120VAC U60X24/37X8CEK-LP/120VAC	75k	 Pg. 26
		24VAC	Natural Gas Liquid Propane	U60X24/37X8CEK-NG/24VAC U60X24/37X8CEK-LP/24VAC		
	49" X 8"	120VAC	Natural Gas Liquid Propane	U60X24/49X8CEK-NG/120VAC U60X24/49X8CEK-LP/120VAC	100k	
		24VAC	Natural Gas Liquid Propane	U60X24/49X8CEK-NG/24VAC U60X24/49X8CEK-LP/24VAC		
Push Button-Flame Sense 	37" X 8"		Natural Gas Liquid Propane	U60X24/37X8FPPKCEK-NG U60X24/37X8FPPKCEK-LP	75k	 Pg. 27
	49" X 8"		Natural Gas Liquid Propane	U60X24/49X8FPPKCEK-NG U60X24/49X8FPPKCEK-LP	90k	
Match Lit 	37" X 8"		Natural Gas Liquid Propane	U60X24/37X8MLFPKCEK-NG U60X24/37X8MLFPKCEK-LP	65k	 Pg. 27
	49" X 8"		Natural Gas Liquid Propane	U60X24/49X8MLFPKCEK-NG U60X24/49X8MLFPKCEK-LP	65k	

READY TO FINISH SERIES (CONTINUED)

MAP APPLIES

COMPLETE FIRE PIT PACKAGES


HPC offers complete fire pit packages that include unfinished enclosures fitted with a certified remote electronic ignition (EI), push button/flame sense (FPPK) or match lit (MLFPK) fire pit insert.

READY TO FINISH


These units are unfinished to allow the customer to finish with stone, veneer, or stucco to match their surrounding. Units are available in round, octagon, square, and linear shapes. Housings take the guess work out of enclosure construction - especially with the difficult round and octagon shapes. These are 18" tall and are constructed of sturdy 22 gauge galvanized steel material, welded frame, and a 1/2" hardboard shell, and weigh 150 lbs.

Enclosure ships from North Carolina Warehouse on pallet; Fire Pit ships from Ohio Warehouse.

RECTANGLE BURNER ENCLOSURE - TROUGH BURNER INSERT

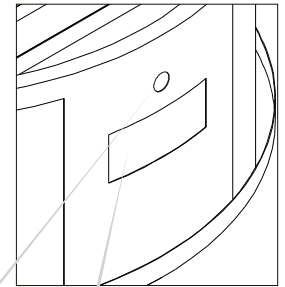

Frame is pre-cut for FPPK or MLFPK.

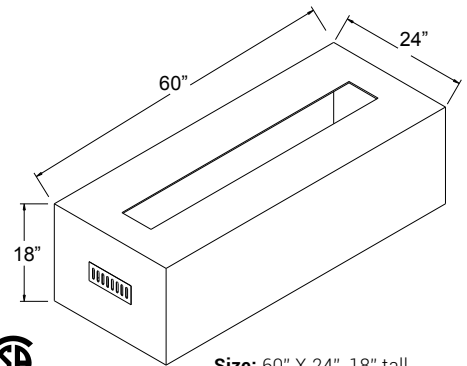

Size: 60" X 24", 18" tall
Insert: 36" or 48" Trough







EI Models Include: Enclosure, Fully Assembled Insert, Input Flex Line and Instructions

FPPK Models Include: Enclosure, Fully Assembled Insert, Mounting Sleeve and Instructions

MLFPK Models Include: Enclosure, Fully Assembled Insert and Instructions



Specifications

Ignition	Insert	Power	Gas type	Model	Max BTU	Insert
	36" Trough	120VAC	Natural Gas	U60X24/36CEK-NG/120VAC	75k	
			Liquid Propane	U60X24/36CEK-LP/120VAC		
	24VAC	Natural Gas	U60X24/36CEK-NG/24VAC	100k		
		Liquid Propane	U60X24/36CEK-LP/24VAC			
	48" Trough	120VAC	Natural Gas	U60X24/48CEK-NG/120VAC	90k	
			Liquid Propane	U60X24/48CEK-LP/120VAC		
	24VAC	Natural Gas	U60X24/48CEK-NG/24VAC	65k		
		Liquid Propane	U60X24/48CEK-LP/24VAC			
	36" Trough		Natural Gas	U60X24/36MLFPKCEK-NG	65k	
			Liquid Propane	U60X24/36MLFPKCEK-LP		
	48" Trough		Natural Gas	U60X24/48MLFPKCEK-NG	65k	
			Liquid Propane	U60X24/48MLFPKCEK-LP		

Pg. 24

Pg. 25


Pg. 25




The finished enclosure in this beautiful backyard escape is guaranteed to take your breath away.

Photo Courtesy of McHale & Koepke - Ohio

RECTANGLE BURNER ENCLOSURE - H-BURNER INSERT

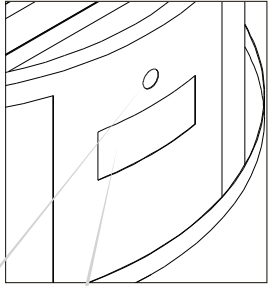

Frame is pre-cut for FPPK or MLFPK.

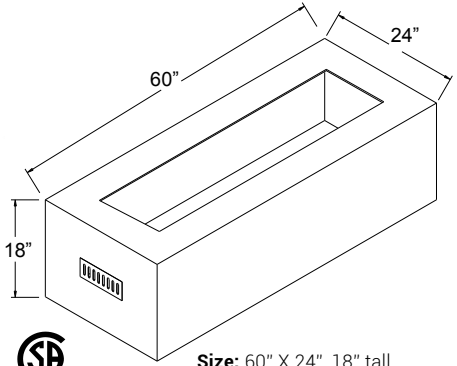







Size: 60" X 24", 18" tall
Insert: 30" X 12" or 36" X 14"

EI Models Include: Enclosure, Fully Assembled Insert, Input Flex Line and Instructions

FPPK Models Include: Enclosure, Fully Assembled Insert, Mounting Sleeve and Instructions

MLFPK Models Include: Enclosure, Fully Assembled Insert and Instructions

Specifications

Ignition	Insert	Power	Gas type	Model	Max BTU	Insert
Electronic Ignition 	30" X 12"	120VAC	Natural Gas Liquid Propane	U60X24/30X12CEK-NG/120VAC U60X24/30X12CEK-LP/120VAC	100k	 Pg. 20
		24VAC	Natural Gas Liquid Propane	U60X24/30X12CEK-NG/24VAC U60X24/30X12CEK-LP/24VAC		
	36" X 14"	120VAC	Natural Gas Liquid Propane	U60X24/36X14CEK-NG/120VAC U60X24/36X14CEK-LP/120VAC	125k	
		24VAC	Natural Gas Liquid Propane	U60X24/36X14CEK-NG/24VAC U60X24/36X14CEK-LP/24VAC		
Push Button-Flame Sense 	30" X 12"		Natural Gas Liquid Propane	U60X24/30X12FPPKCEK-NG U60X24/30X12FPPKCEK-LP	90k	 Pg. 21
	36" X 14"		Natural Gas Liquid Propane	U60X24/36X14FPPKCEK-NG U60X24/36X14FPPKCEK-LP	90k	
Match Lit 	30" X 12"		Natural Gas Liquid Propane	U60X24/30X12MLFPKCEK-NG U60X24/30X12MLFPKCEK-LP	65k	 Pg. 21
	36" X 14"		Natural Gas Liquid Propane	U60X24/36X14MLFPKCEK-NG U60X24/36X14MLFPKCEK-LP	65k	


READY TO FINISH SERIES (CONTINUED)

MAP APPLIES


COMPLETE FIRE PIT PACKAGES

HPC offers complete fire pit packages that include unfinished enclosures fitted with a certified remote electronic ignition (EI), push button/flame sense (FPPK) or match lit (MLFPK) fire pit insert.

RECTANGLE BURNER ENCLOSURE - S-FIRE BURNER INSERT

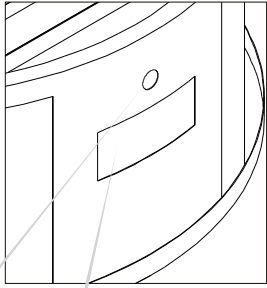

Frame is pre-cut for FPPK or MLFPK.

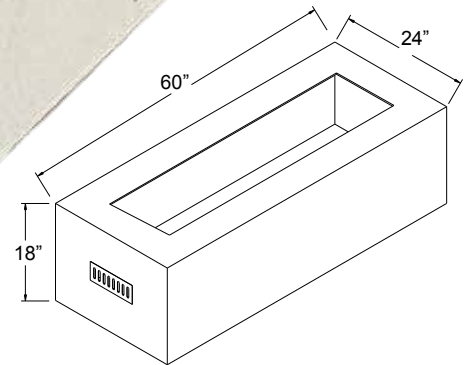

EI Models Include: Enclosure, Fully Assembled Insert, Input Flex Line and Instructions







FPPK Models Include: Enclosure, Fully Assembled Insert, Mounting Sleeve and Instructions

MLFPK Models Include: Enclosure, Fully Assembled Insert and Instructions



Size: 60" X 24", 18" tall
Insert: 36" X 14"

Specifications


Ignition	Size	Power	Gas type	Model	Max BTU	Insert
 Electronic Ignition	60x24x18"	120VAC	Natural Gas	U60X24/SFIRECEK-NG/120VAC	75k	 Pg. 22
		24VAC	Natural Gas	U60X24/SFIRECEK-NG/24VAC		
 Push Button	60x24x18"		Natural Gas	U60X24/SFIREFPPKCEK-NG	75k	 Pg. 23
			Liquid Propane	U60X24/SFIREFPPKCEK-LP		
 Match Lit	60x24x18"		Natural Gas	U60X24/SFIREMLFPKCEK-NG	65k	 Pg. 23
			Liquid Propane	U60X24/SFIREMLFPKCEK-LP		




This Enclosure turns this hotel's backyard patio into an outdoor room and relaxation spot.

Photo Courtesy of Pridemark Residential - Arizona

SQUARE BURNER ENCLOSURE

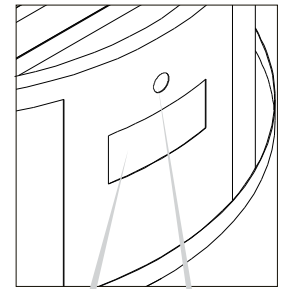

Frame is pre-cut for FPPK or MLFPK.

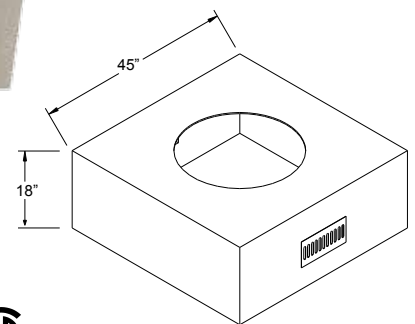

EI Models Include: Enclosure, Fully Assembled Insert, Input Flex Line and Instructions

FPPK Models Include: Enclosure, Fully Assembled Insert, Mounting Sleeve and Instructions

MLFPK Models Include: Enclosure, Fully Assembled Insert and Instructions



Size: 45" X 45", 18" tall
Insert: 25" Bowl Pan, 18" Penta Burner

Specifications

Ignition	Size (A")	Power	Gas type	Model	Max BTU	Insert
Electronic Ignition 	45"	120VAC	Natural Gas Liquid Propane	U45S/25SSCEK-NG/120VAC U45S/25SSCEK-LP/120VAC	125k	 Pg. 12
		24VAC	Natural Gas Liquid Propane	U45S/25SSCEK-NG/24VAC U45S/25SSCEK-LP/24VAC		
Push Button 	45"		Natural Gas Liquid Propane	U45S/FPPK25CEK-NG U45S/FPPK25CEK-LP	90k	 Pg. 13
Match Lit 	45"		Natural Gas Liquid Propane	U45S/MLFPK25CEK-NG U45S/MLFPK25CEK-LP	65k	 Pg. 13

COPPER BOWL SERIES

COMPLETE FIRE PIT PACKAGES

The HPC Copper Bowl Series is available in the Fire Bowl or the Pool Side Fire & Water Bowl models. Both versions are fitted with a CSA Certified match lit (MLFPK) or remote electronic ignition (EI) fire pit insert and are available with both Liquid Propane and Natural Gas. These come in an oil rubbed look with either a hammered finish or a smooth finish, based on model. The Pool Side Fire & Water Bowls utilize 1" FIP fitting for pool pump connection.

SHIPPING: Both bowl and fire pit insert ship from Ohio warehouse - crate on pallet.




Mesa Fire Bowl

Mesa Fire & Water Bowl




MESA MODELS - HAMMERED

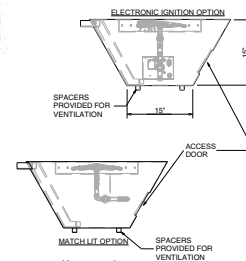This round hammered bowl has an oil-rubbed look. Includes Access Door.



Size: 32" diameter, 15" tall, 15" base
Burner: 12" Penta **Pan:** 18" Flat

Specifications

Ignition	Bowl Type	Power	Gas type	Models	Max BTU
Electronic Ignition 	Fire	120vac	Natural Gas	MESA32-EI-NG/120VAC	50k
			Liquid Propane	MESA32-EI-LP/120VAC	
	Fire	24vac	Natural Gas	MESA32-EI-NG/24VAC	50k
			Liquid Propane	MESA32-EI-LP/24VAC	
Match Lit 	Fire & Water	24vac	Natural Gas	MESA32W-EI-NG/24VAC	50k
			Liquid Propane	MESA32W-EI-LP/24VAC	
	Fire		Natural Gas	MESA32-MLFPK-NG	50k
			Liquid Propane	MESA32-MLFPK-LP	
Match Lit 	Fire & Water		Natural Gas	MESA32W-MLFPK-NG	50k
			Liquid Propane	MESA32W-MLFPK-LP	


SIERRA MODELS - SMOOTH

This square smooth bowl has an oil-rubbed look. Includes Access Door.






Sierra Fire Bowl

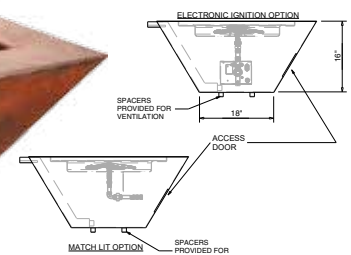
Sierra Fire & Water Bowl



Specifications

Ignition	Bowl Type	Power	Gas type	Models	Max BTU
Electronic Ignition 	Fire	120vac	Natural Gas	SIER36-EI-NG/120VAC	50k
			Liquid Propane	SIER36-EI-LP/120VAC	
	Fire	24vac	Natural Gas	SIER36-EI-NG/24VAC	50k
			Liquid Propane	SIER36-EI-LP/24VAC	
Match Lit 	Fire & Water	24vac	Natural Gas	SIER36W-EI-NG/24VAC	50k
			Liquid Propane	SIER36W-EI-LP/24VAC	
	Fire		Natural Gas	SIER36-MLFPK-NG	50k
			Liquid Propane	SIER36-MLFPK-LP	
Match Lit 	Fire & Water		Natural Gas	SIER36W-MLFPK-NG	50k
			Liquid Propane	SIER36W-MLFPK-LP	

Size: 36" x 36", 16" tall, 18" x 18" base
Burner: 12" Penta
Pan: 19" Bowl

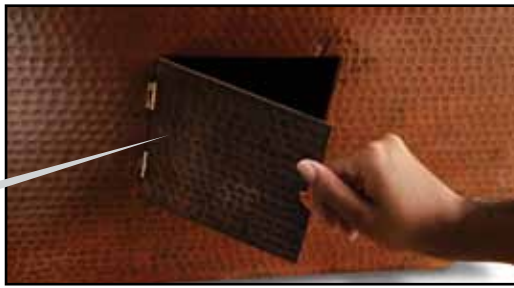

Copper Cleaning Kit (CCK)
Cleaning kit includes bee's wax, sandpaper and steel wool.




SEDONA MODELS - HAMMERED

This square hammered bowl has an oil rubbed look. Includes Access Door.



Sedona Fire Bowl

Sedona Fire & Water Bowl

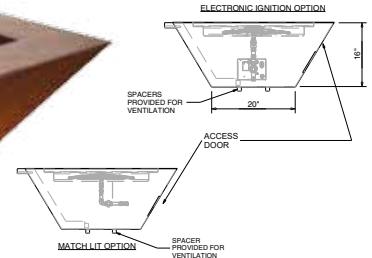

Size: 40" x 40", 16" tall, 20" x 20" base
Burner: 18" Penta **Pan:** 25" Bowl

Specifications

Ignition	Bowl Type	Power	Gas type	Models	Max BTU
	Fire	120vac	Natural Gas Liquid Propane	SEDO40-EI-NG/120VAC SEDO40-EI-LP/120VAC	100k
	Fire	24vac	Natural Gas Liquid Propane	SEDO40-EI-NG/24VAC SEDO40-EI-LP/24VAC	100k
	Fire & Water	24vac	Natural Gas Liquid Propane	SEDO40W-EI-NG/24VAC SEDO40W-EI-LP/24VAC	100k
	Fire		Natural Gas Liquid Propane	SEDO40-MLFPK-NG SEDO40-MLFPK-LP	65k
	Fire & Water		Natural Gas Liquid Propane	SEDO40W-MLFPK-NG SEDO40W-MLFPK-LP	65k


TEMPE MODELS - HAMMERED

This round hammered bowl has an oil rubbed look. Controls sit below bowl.



Tempe Fire Bowl

Tempe Fire & Water Bowl

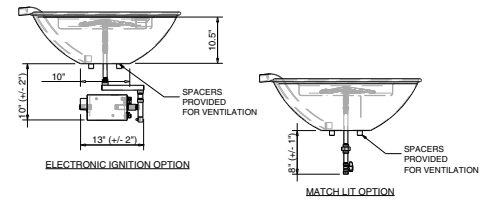

Tempe - Controls below bowl

Size: 31" diameter, 10.5" tall, 10" base
Burner: 12" Penta **Pan:** 19" Bowl

Specifications

Ignition	Bowl Type	Power	Gas type	Models	Max BTU
	Fire	120vac	Natural Gas Liquid Propane	TEMP31-EI-NG/120VAC TEMP31-EI-LP/120VAC	50k
	Fire	24vac	Natural Gas Liquid Propane	TEMP31-EI-NG/24VAC TEMP31-EI-LP/24VAC	50k
	Fire & Water	24vac	Natural Gas Liquid Propane	TEMP31W-EI-NG/24VAC TEMP31W-EI-LP/24VAC	50k
	Fire		Natural Gas Liquid Propane	TEMP31-MLFPK-NG TEMP31-MLFPK-LP	50k
	Fire & Water		Natural Gas Liquid Propane	TEMP31W-MLFPK-NG TEMP31W-MLFPK-LP	50k

COPPER BOWL SERIES (CONTINUED)

COMPLETE FIRE PIT PACKAGES




The HPC Phoenix Copper Bowl model is available in Fire Bowl models only. All three versions are fitted with a CSA Certified match lit (MLFPK), push button flame sensing (FPPK) or remote electronic ignition (EI) fire pit insert and are available with either Liquid Propane or Natural Gas. These come in an oil rubbed, hand hammered finish that is a beautiful work of art.

SHIPPING: Both bowl and fire pit insert ship from Ohio warehouse - crate on pallet.




PHOENIX H-BURNER SPECIFICATIONS

Size: 47" Length, 25" Width, 18" tall, 13" base
Burner: 30" H-Burner **Pan:** 36" x 14"

Ignition	Bowl Type	Power	Gas type	Models	Max BTU
Electronic Ignition 	Fire	120vac	Natural Gas Liquid Propane	PHOEN47X25/HBURN-EI-NG/120VAC PHOEN47X25/HBURN-EI-LP/120VAC	100k
Push Button Flame Sense 	Fire		Natural Gas Liquid Propane	PHOEN47X25/HBURN-FPPK-NG PHOEN47X25/HBURN-FPPK-LP	90k
Match Lit 	Fire		Natural Gas Liquid Propane	PHOEN47X25/HBURN-MLFPK-NG PHOEN47X25/HBURN-MLFPK-LP	65k




PHOENIX MODELS - HAMMERED

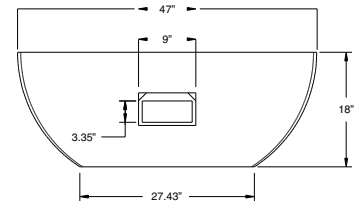
This hammered bowl has an oil-rubbed look. Includes Access Door.



PHOENIX S-FIRE SPECIFICATIONS




Size: 47" Length, 25" Width, 18" tall, 13" base
Burner: 30" S-Fire **Pan:** 36" x 14"

Ignition	Bowl Type	Power	Gas type	Models	Max BTU
Electronic Ignition 	Fire	120vac	Natural Gas Liquid Propane	PHOEN47X25/SFIRE-EI-NG/120VAC PHOEN47X25/SFIRE-EI-LP/120VAC	75k
Push Button Flame Sense 	Fire		Natural Gas Liquid Propane	PHOEN47X25/SFIRE-FPPK-NG PHOEN47X25/SFIRE-FPPK-LP	75k
Match Lit 	Fire		Natural Gas Liquid Propane	PHOEN47X25/SFIRE-MLFPK-NG PHOEN47X25/SFIRE-MLFPK-LP	65k



PHOENIX TROUGH SPECIFICATIONS

Size: 47" Length, 25" Width, 18" tall, 13" base
Burner: 36" Linear Burner Trough **Pan:** 36" Trough

Ignition	Bowl Type	Power	Gas type	Models	Max BTU
Electronic Ignition 	Fire	120vac	Natural Gas Liquid Propane	PHOEN47X25/TRGH-EI-NG/120VAC PHOEN47X25/TRGH-EI-LP/120VAC	75k
Push Button Flame Sense 	Fire		Natural Gas Liquid Propane	PHOEN47X25/TRGH-FPPK-NG PHOEN47X25/TRGH-FPPK-LP	75k
Match Lit 	Fire		Natural Gas Liquid Propane	PHOEN47X25/TRGH-MLFPK-NG PHOEN47X25/TRGH-MLFPK-LP	65k

Access Door - all models



Convenience Feature - Magnetic Access Door for the Push Button Flame Sense (FPPK) and Match Lit (MLFPK) models.

WATER FEATURE INSERTS



C US

MAP
APPLIES

EVOLUTION 360 - H2Onfire

Perfect for any residential or commercial setting, these innovative fire and water effects add the sound of soothing water and beautiful blue LED lights to the warmth and romance of fire. They arrive fully assembled with a self-contained filtrated water system and wall switch control of fire, water, and lights. Just level the basin and connect the water, electric, and gas.

These features can be installed on practically any patio in a residential or commercial setting - no pond or pool needed! This fully assembled, plug-n-play system comes ready to install - simply level the water pit then connect water, electric, and gas. Finally, enclose with stone, veneer, stucco, etc. to match your patio décor. Operation is even simpler - three switches control the water, LED lights, and fire pit. The Evolution 360 is made of durable, weather resistant, black polyethylene and engineered to last - no on-site guesswork. **Ships in crate on pallet.**

EVOLUTION 360 AND H2Onfire FEATURES



Evolution 360 Model



Beautiful LED Lighting



Low Level Sensor



Auto-fill - Overflow

Swim World Pools - TN ▲

▼ IBS Show Las Vegas



H2Onfire Model



Water Filter



Flow Control Valve



Control Box

Features:

- Beautiful blue LED lights to illuminate water** - hidden under scupper.
- Auto fill system** - automatically adds water when needed; Low level sensor protects pump if water supply issue
- Filtration** - water is conditioned with a reusable, easy-to-clean filter
- Water pump** - 2,400 to 4,800 gallons per-hour depending on model

- Leveling / Height Setting** - four heavy, 3/4" threaded feet give flexibility of height adjustment and leveling. Easily adjusted on site with ~4" of travel
- Overflow feature** - allows water to escape safely
- Electrical Connection** - simply with a 5-lead, 10' cable ready to connect. Control Panel incorporates 3 push-to-reset breakers for water, LEDs & fire

EVOLUTION 360 AND H2Onfire INFORMATION

Basin Dimensions

- Outside Diameter: 52"
- Overall Height: 26" - 30"
- Basin: 14"-18" with Adjustable Side Wall Height
- Tower: 10" Diameter Flange to Mount Centerpiece

Additional Load

- Basin floor: 200 lbs max
- Tower: 100 lbs max

Basin Weight

- 125 lbs Dry, 532 lbs Wet

Water

- Softened tap water only - Minor conditioning needed
- Capacity: Unit holds 50 Gallons (less with Water Rock)
- Water Pump: 3,200gph Standard (higher rates available)

Power

- 120VAC - Control via panel or from remote location.



Need help? Use our fire pit selector at hpcfire.com

EVOLUTION 360 - FIRE AND WATER INSERTS MAP

HPC'S AWARD WINNING - VERY POPULAR FIRE AND WATER ELEMENT APPLIES

These insert's have many unique and user friendly features that make it a year round water and fire pit. We have made these inserts so the fire, water and lighting features will work independently of each other making it an ideal insert in areas that need to winterize the water feature but still enjoy their landscape.

HAMMERED COPPER FIRE BOWL

Hammered Copper - 4 Scupper



Four Scupper Feature




Hammered Copper - 360

360 Feature



360 Feature being finished with paver stone

Includes Basin, 26" Copper Water Bowl, and Electronic Ignition Fire Pit (13SSEI).

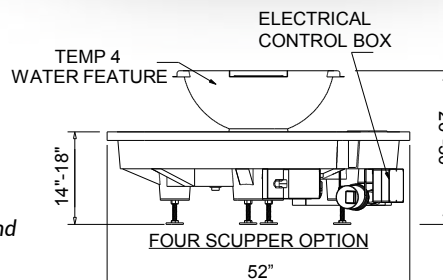

Winner of two Vesta Awards for Product Innovation and Design

Size: 52" diameter, 14"-18" tall
Burner: 12" Round

Specifications - Electronic Ignition

Bowl Type	Power	Gas type	Models (EI)	Max BTU
4 Scupper	120vac	Natural Gas	WB52R-TEMP4-EI-NG	90k
		Liquid Propane	WB52R-TEMP4-EI-LP	
360	120vac	Natural Gas	WB52R-TEMP360-EI-NG	90k
		Liquid Propane	WB52R-TEMP360-EI-LP	



H2Onfire - FIRE ON WATER INSERTS

MAP
APPLIES

HPC'S AWARD WINNING - VERY POPULAR FIRE AND WATER ELEMENT

HPC is proud to announce another first in the industry as well as adding a new element to the water feature insert series, the H2Onfire fire on water feature. This insert has been a longtime request of our dealers (and the consumer). A true electronic fire on water, turn-key appliance operating at a gas pressure less than 1/4 psi, allowing for residential installations. It is also the first "fire on water" system to be certified in North America to the Z21.97 standard by the CSA Group - passing the stringent wind, rain, and combustion test.

The fire ring is totally submerged underwater using our patent pending burner design and back flow prevention to protect the controls - giving an even and very appealing flame at only 65,000 Btu. This is NOT a match lit system- it is remote control with auto relight. Our ignition and flame sensing network is located in the center tower monitoring flame conditions at all times.
Ships in crate on pallet.

CONCRETE FIRE ON WATER AND HAMMERED COPPER 360




Black Concrete Bowl - 4 Scupper

Burnt Sienna Concrete Bowl - 4 Scupper

Hammered Copper Fire on Water - 360

Fully Assembled. Includes Basin, Water Bowl, and Fire on Water Control System

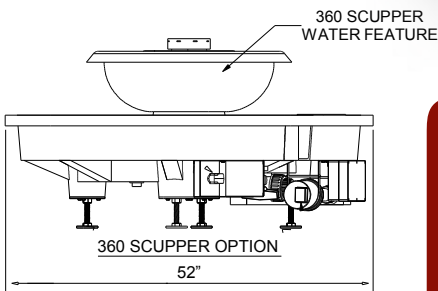

Evolution 360/H2Onfire Enclosure Features:


- Made of lightweight aluminum
- 74" O.D.
- Modular 3 section construction. Bolts together and is easy to lift.
- Adjustable leveling feet
- Lockable access door
- Color: Copper vein with flat black.
- Powder coated. Additional colors coming soon!



WPE-72ROUND-TB/CV



578-G4
Optional Remote Available



Winner of Vesta Awards Finalist

Specifications - Electronic Ignition

Size: 52" diameter, 14"-18" tall
Burner: Underwater

Color	Bowl Type	Power	Gas type	Models	Max BTU
Concrete Burnt Sienna	4 Scupper	120vac	Natural Gas	FW52R-MONACO4BS-EI-NG	65k
			Liquid Propane	FW52R-MONACO4BS-EI-LP	
Concrete Black	4 Scupper	120vac	Natural Gas	FW52R-MONACO4BL-EI-NG	65k
			Liquid Propane	FW52R-MONACO4BL-EI-LP	
Copper - Hammered	360	120vac	Natural Gas	FW52R-CYPRUS360-EI-NG	65k
			Liquid Propane	FW52R-CYPRUS360-EI-LP	

Need help? Use our fire pit selector at hpcfire.com

Match proper accessories to your fire pit model - see Pg. 67-70.

TK TORCH KITS

MAP
APPLIES

BACKYARD FIRE EFFECTS THAT WILL WOW ANYONE

Now your backyard can have that resort feeling. How nice it is to have instant "tiki" style fire at your finger tips. No more picking up fuel; No more filling with messy oils or gel. These torches are state of the art, very robust, reliable, and built to last.

TK TORCH KITS: MATCH LIT



FPC-TK TORCH (Optional)
TK Torch Cover w/Elastic Hem (3.5" Top Dia x 9.5" Bottom Dia. x 14" Height)




940-POSTMOUNT (Optional)
TK Torch Post Mount



Black Aluminum



Hammered Copper

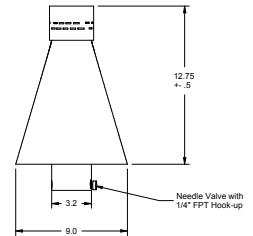

Flame Height Control Knob

Size: 84" Tall (with 12" underground)
Burner: TK

Specifications - Match Lit

Style	Style	Gas type	Models	Max BTU
Black	Complete with 96" Post	Natural Gas	TK40MAN-B-NG	25k
		Liquid Propane	TK40MAN-B-LP	
	Tiki Top Only	Natural Gas	TKHEAD40MAN-B-NG	
		Liquid Propane	TKHEAD40MAN-B-LP	
Copper	Complete with 96" Post	Natural Gas	TK40MAN-C-NG	25k
		Liquid Propane	TK40MAN-C-LP	
	Tiki Top Only	Natural Gas	TKHEAD40MAN-C-NG	
		Liquid Propane	TKHEAD40MAN-C-LP	

Accessories

Model	Description
580-TIKI	8' Hose
940-POST	84" Black Powder Coated Post
FPC-TK TORCH	Vinyl Cover for Torch Head
940-POSTMOUNT	TK Torch Post Mount

Features:

Burner assembly made of rugged #304 stainless steel for durability.
Outdoor powder coated post.
Built for Natural Gas or LP.
3-year warranty on hardware; 1-year warranty on gas controls.
Kano tops available in 2 styles: Hammered Copper or Black Finish
Available Head Only assembly for column mounting.

FIRE PIT ACCESSORIES

EVERYTHING YOU NEED IN ONE PLACE

HPC offers everything you need to turn your fire pit into the work of art and outdoor focal point that it is. With one stop shopping you can spend less time finding media and accessories and more time enjoying your outdoor fire pit.

GLASS WIND GUARDS

HPC provides a high quality glass wind guard specially designed to complement as well as provide additional safety for HPC fire pit inserts of all shapes- round, square, rectangle and linear. These feature a durable tempered glass construction to ensure a long lasting, heat resistant product. Wind guards reduce flame disturbance of your fire pit and prevents loose items from getting too close to the flames.

Features:

Tempered Glass - Heavy duty 3/16" clear glass is tempered to improve durability and allow it to withstand high temperatures. Depending on wind guard size- 4 or 6 sections complete the desired shape.

Brackets- Polished aluminum brackets and plastic support feet provided.

Specifications

Shape	Size	Model	Height
Round	23"	WG23-RD	6"
	30"	WG30-RD	
	38"	WG38-RD (6 Pieces)	
	48"	WG48-RD (6 Pieces)	
Square	25x25"	WG25-SQ	6"
	31x31"	WG31-SQ	
	37x37"	WG37-SQ	
	43x43"	WG43-SQ	
	49x49"	WG49-SQ	
Rectangle	31x19"	WG31X19-RECT	6"
	37x19"	WG37X19-RECT	
	43x21"	WG43X21-RECT	
	49x21"	WG49X21-RECT	
Linear	61x23"	WG61X23-RECT	6"
	31x15"	WG31X15-L	
	43x15"	WG43X15-L	
	55x15"	WG55X15-L	
	67x15"	WG67X15-L	



Round Wind Guard



Square Wind Guard



Rectangle Wind Guard



Linear Wind Guard

WIND GUARD REPLACEMENT CLIPS

Replacement clips for HPC Wind Guards (one clip per pack). Please note if needing a bottom clip, will need rubber foot, also found below.

Model	Description
WG-CC-RD	Replacement chrome clip for round wind guards
WG-CC-SQ/RECT	Replacement Chrome Corner Clip For Square & Rectangle Wind Guards

WIND GUARD REPLACEMENT RUBBER FEET

Replacement rubber feet for HPC Wind Guards (one foot per pack).

Model	Description
WG-RUBBER FOOT-RD	Replacement rubber foot for round wind guards
WG-RUBBER FOOT-SQ/RECT	Replacement rubber foot for square & rectangle wind guards



WG-SC

WG-RUBBER FOOT-SQ/RECT

WG-CC-SQ/RECT

WG-EGS

WIND GUARD EXTENSION KIT AND PARTS

The WG-EXT/STR KIT allows you to combine rectangle, linear and square HPC wind guards.

Model	Description
WG-EXT/STR KIT	Complete Kit - 4 Extension chrome straight clips and 4 extension glass supports with rubber foot
WG-SC	Replacement extension chrome straight clip for square & linear wind guards-used for extending lengths on glass panels
WG-EGS	Replacement extension glass support with rubber foot



WG-EXT/STR KIT

WG-EXT/STR KIT installed

FIRE PIT ACCESSORIES (CONTINUED)


EVERYTHING YOU NEED IN ONE PLACE

HPC offers everything you need to turn your fire pit into the work of art and outdoor focal point that it is. With one stop shopping you can spend less time finding media and accessories and more time enjoying your outdoor fire pit.

INSTALLATION COLLARS

FLEXIBLE INSTALL COLLAR - INCLUDES 2 PER CARTON

The flexible install collar merges the gap between the fire pit structure and the insert pan for easy installation and auto centering featured with a curved lip. This flexible install collar allows for an easy 3 step installation saving you time with our one size fits all product. The collar can be formed to fit any shaped fire pit.

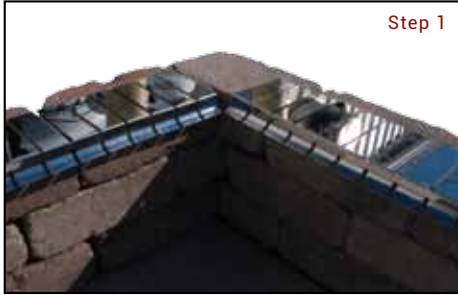

Step 1

Place the collar



Step 2

Install the collar



Step 3

Install the insert



Available June 2018

Model	Size (1)	Includes
IC44SS-FF	44x6.2"	2 per carton

SOLID INSTALL COLLAR - FOR BOWL PANS

Fire pit installation can be made easier with our installation collar, of an appropriate size, mortared in just below the top course of the enclosure. The collars make the pan and valve box easy to access.

The ID and OD of the installation collars differ by 6" to allow a small space between the side of the pan and the collar as well as 1" or more of the collar to project into the body of the enclosure and be mortared in if desired. The collar should be installed into the enclosure while it is being built. Collar should be 2" to 4" below the top of the enclosure.



Model	Size	ID	OD
IC19GALV	19" Pan Size	20"	26"
IC25GALV	25" Pan Size	26"	32"
IC31GALV	31" Pan Size	32"	38"
IC37GALV	37" Pan Size	38"	44"
IC43GALV	43" Pan Size	43.5"	49.5"

CERAMIC RIVER ROCK SERIES

Looking for something other than lava rock or glass? HPC has a third option for media over your outdoor (or indoor) burner, our River Rock Series. These imitation stones are lightweight ceramic fiber, gel cast and designed to take on the outdoor elements. Each set comes with an 84 piece assortment of large and small stones (large pieces are 4 1/2", small pieces are 2 1/2"). One set is 1/2 cubic foot (15 lbs). Available in two styles – black or multi color (light and dark brown, gray, and black)

Model	Color	Size
FPR84MC	Multicolor	2.5" - 4.5" Size
FPR84BL	Black	2.5" - 4.5" Size



Multicolor



Black

FIRE PIT MEDIA - LAVA ROCK AND CERAMIC FIBER

LAVA ROCK



Time tested, Lava Rock is proven to increase combustion efficiency while maintaining a classy look for any fire pit. The size of each piece of rock varies from 1" to 2". Lava rock is sold in 1/2 cubic foot increments. Serves as an excellent base for our specially designed outdoor logs.

Model	Size
657	1"-2" Size



ROLLED LAVA STONE






























Unique finish lava stone rolled smooth. Available in 1/2 cubic foot bags.

Color	Model	Size
Black	857S	1"-2" Size
	857M	2.5"-4.5" Size
Red	858S	1"-2" Size
	858M	2.5"-4.5" Size


FIRE PIT MEDIA - DECORATIVE GLASS

HPC has 28 colors to choose from - The glass shown- is 1/4" except for those indicating "5" (1/2")

					
FPGLYELLOW	FPGLBLACK	FPGLBLACKREFL	FPGLBRONZE	FPGLBRNZREFL	FPGLBRONZE5
					
FPGLCHMPINK	FPGLCLEAR	FPGLCLEAR5	FPGLCOBALTBLUE	FPGLCOPPER	FPGLEVERGREEN
					
FPGLEVGRNREFL	FPGLGOLDREFL	FPGLGRAY	FPGLGRAY.5	FPGLGRAYREFLEC	FPGLLIGHTGREEN
					
FPGLORANGE	FPGLPACIFICBLUE	FPGLPACBLUEREFL	FPGLPLATINUM	FPGLPURPLE	FPGLRED
					
FPGLSOLEX	FPGLSTARFIRE	FPGLSTRFIRE5	FPGLTURQUOISE		

Sold in 10 lb increments (Priced per pound)
 Note: Glass Orders drop shipped separately from California.

NEED HELP? CHECK OUT OUR GLASS CALCULATOR AT HPCFIRE.COM!

 Need help? Use our fire pit selector at hpcfire.com

FIRE PIT ACCESSORIES (CONTINUED)

EVERYTHING YOU NEED IN ONE PLACE

HPC offers everything you need to turn your fire pit into the work of art and outdoor focal point that it is. With one stop shopping you can spend less time finding media and accessories and more time enjoying your outdoor fire pit.



OUTDOOR LOGS

Designed specifically for the outdoors, these are sure to enhance the flame in your fire pit. Being ceramic fiber, they develop a glow where the flame is the hottest. These are available in four models, Woodland, Campfire, Western Pine and Linear Birch in 2, 4, 5, 6 and 8 piece sets depending on the size.

Specifications

Style	Model	Piece	Piece Length
Woodland	FPL12W4	4	9"-10"
	FPL17W4	4	11"-13"
	FPL17W5	5	11"-13"
	FPL24W5	5	15"-19"
	FPL24W6	6	15"-19"
	FPL36W6	6	24"-28"
	FPL48W8	8	24"-37"
	FPL48W2	2	37"
Campfire	FPL17C4	4	13"-16"
	FPL24C6	6	14"-17"
Western Pine	FPL17WP5	5	11"-13"
	FPL24WP6	6	15"-19"
	FPL36WP6	6	24"-28"
Linear Birch	FPL14LB5	5	9"-10"
	FPL28LB5	5	14"-28"



Monsma - Michigan

WOODLAND STYLE

This is our most popular style. These have a weathered look of gray and black which looks best when resting on a bed of lava rock. These are available in 2, 4, 5, 6 and 8 piece sets up to our large FPL48 for size 36" fire ring and above fire pits.



CAMPFIRE STYLE

The Campfire set is "the original log set" and are brown and black. These look great resting on a bed of lava rock. These are available in four and six piece sets, up to our large FPL24 size for size 24" and above fire pits.



WESTERN PINE STYLE

New outdoor logs in a beautiful western pine style! The color combination is brown, tan and black creating an amazingly realistic wood feature for your project.



LINEAR BIRCH STYLE

New Birch style logs designed specifically for HPC Linear Burners! When assembled the logs are only 8" wide - multiple sets can be used for long linear applications.



LOG GRATES - FIREPLACE

HPC carries 24", 30", and 36" stainless steel grates. These are made of solid 304 stainless steel, square stock material and are welded at every joint for additional strength.



Model	Size
SFG24	24"x18"x6"
SFG30	30"x18"x6"
SFG36	36"x18"x6"

READY TO FINISH ENCLOSURES



These units are unfinished to allow the customer to finish with stone, veneer, or stucco to match their surrounding. Units are available in round, octagon, square, and linear shapes. Housings take the guess work out of enclosure construction - especially with the difficult round and octagon shapes. These are 18" tall and are constructed of sturdy 22 gauge galvanized steel material, welded frame, and a 1/2" hardiboard shell, and weigh 150 lbs.

Shape	Size	Models	Pan Size
Round	45"X45" X 18"h	FPE45-ROUND	25"
	54"X54" X 18"h	FPE54-ROUND	
Tapered Round	54"X54" X 18"h	FPE54-ROUNDTAP	25"
Square	45"X45" X 18"h	FPE45-SQUARE	25"
Tapered Square	60"X60" X 18"h	FPE60-SQUARETAP	
Octagon	45"X45" X 18"h	FPE45-OCTAGON	25"
	54"X54" X 18"h	FPE54-OCTAGON	
Rectangle	60"X24" X 18"h	FPE60X24-LINEAR	(See CHART A)
		FPE60X24-H-BURNER	
Tapered Box	60"X36" X 18"h	FPE60X36TAP	36" Trough

CHART A

LINEAR FIRE PIT INSERT OPTIONS: FPE60X24-LINEAR

INTERLINK: 37X8" Fire Pit: FPE60x24-LINEAR/37X8
49X8" Fire Pit: FPE60x24-LINEAR/49X8


TROUGH: 36" Fire Pit: FPE60x24-LINEAR/36
48" Fire Pit: FPE60x24-LINEAR/48

RECTANGLE: 30x12" Fire Pit: FPE60x24-H-BURNER/30X12
36x14" Fire Pit: FPE60x24-H-BURNER/36X14

Rectangle (CHART A)



Frame is pre-cut for FPPK or MLFPK but NOT hardiboard.

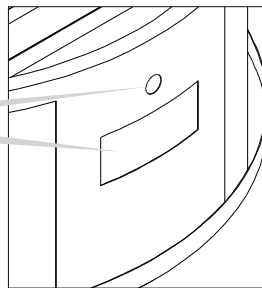

Round



Tapered Square



Square



Octagon



Tapered Box



Tapered Round



FIRE PIT ACCESSORIES (CONTINUED)

EVERYTHING YOU NEED IN ONE PLACE

HPC offers everything you need to turn your fire pit into the work of art and outdoor focal point that it is. With one stop shopping you can spend less time finding media and accessories and more time enjoying your outdoor fire pit.

FIRE PIT COVERS

ROUND ALUMINUM COVERS - TALL

Now protect your fire feature in style! These lightweight aluminum hard covers are powder coated with UV resistant, high-heat textured black or gloss copper. They are available in two sizes - 32" (15lbs) and 44" (20lbs).

Color	Size	Models	Height	Weight
Copper Vein	32"	FPHC-32C	10"	15 lbs
	44"	FPHC-44C	14"	20 lbs
Black	32"	FPHC-32BL	10"	15 lbs
	44"	FPHC-44BL	14"	20 lbs




ROUND ALUMINUM COVERS - SHORT



Color	Size	Models	Height	Weight
Copper Vein	24"	FPHC-24C	1"	6 lbs
	36"	FPHC-36C		13 lbs
	48"	FPHC-48C		23.5 lbs
Black	24"	FPHC-24BL	1"	6 lbs
	36"	FPHC-36BL		13 lbs
	48"	FPHC-48BL		23.5 lbs

COPPER COVERS FOR COPPER BOWLS

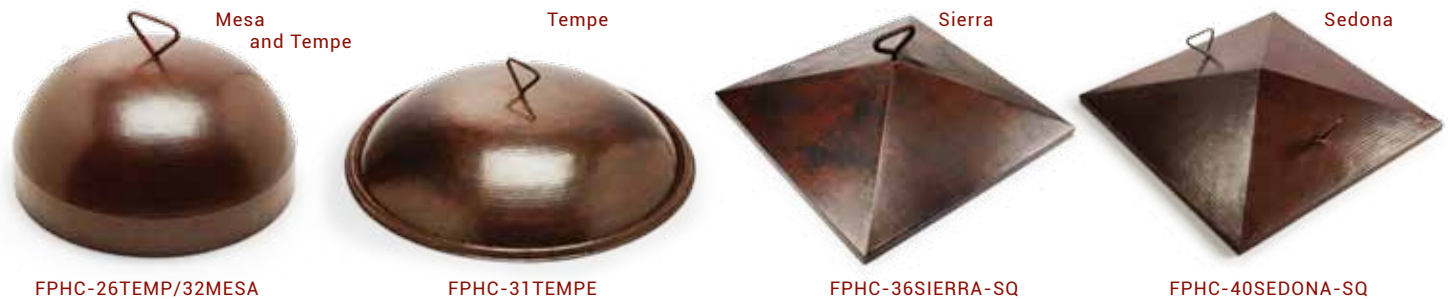

Shape	Finish	Models	Size	Height	Weight
Round	Hammered	FPHC-26TEMP/32MESA	19"	8.5"	7.5 lbs
	Hammered	FPHC-31TEMPE	32"	5.75"	15 lbs
Square	Smooth	FPHC-36SIERRA-SQ	26"X26"	7"	13 lbs
	Hammered	FPHC-40SEDONA-SQ	30"X30"	7"	13.5 lbs

STAINLESS STEEL COVERS

These stainless steel covers are constructed of #304, 20g material with handle. Great for covering fire pits without outdoor logs. Linear trough covers are designed specifically for our trough series, be it match lit, manual ignition, or remote electronic ignition models. These are lightweight and have handles for ease of use.

LINEAR

Stainless	Size	Model	Height	Handle	Weight
Brushed	28" x 9.5"	TPHC-24SS	1"	1	11 lbs
	40" x 9.5"	TPHC-36SS	1"	1	13 lbs
	52" x 9.5"	TPHC-48SS	1"	2	15 lbs
	64" x 9.5"	TPHC-60SS	1"	2	18lbs

RECTANGLE

Stainless	Size	Model	Height	Handle	Weight
Brushed	28" x 16"	HPHC-24X12SS	1"	1	16 lbs
	34" x 16"	HPHC-30X12SS	1"	1	18 lbs
	40" x 18"	HPHC-36X14SS	1"	1	20 lbs
	46" x 18"	HPHC-42X14SS	1"	2	22 lbs
	52" x 20"	HPHC-48X16SS	1"	2	24 lbs
	58" x 20"	HPHC-54X16SS	1"	2	28 lbs



Match proper accessories to your fire pit model - see Pg. 67-70.



VINYL COVERS

Made of durable black vinyl and protects your fire pit and enclosure from debris and wet weather. The round covers have elastic and rectangle covers have a pull string at the bottom for ease of applying and removal. NOTE: Skirt Length 10"

ROUND COVERS

Max Size	Models	Fits Enclosures
35"	FPC-35	23" ~ 35"
45"	FPC-45	30" ~ 45"
53"	FPC-53	35" ~ 53"
64"	FPC-64	43" ~ 64"
76"	FPC-76	60" ~ 76"



SQUARE COVERS

Max Size	Models	Fits Enclosures
48" x 48"	FPC-48SQ	36" ~ 48"
60" x 60"	FPC-60SQ	45" ~ 60"



RECTANGLE COVERS

Max Size	Models	Fits Enclosures
48" x 30"	FPC-44X30	34x20" ~ 44x30"
62" x 30"	FPC-62X30	52x20" ~ 62x30"
78" x 40"	FPC-78X40	68x30" ~ 78x40"
90" x 40"	FPC-90X40	80x30" ~ 90x40"
94" x 30"	FPC-94X30	84x20" ~ 94x30"
102" x 40"	FPC-102X40	92x30" ~ 102x40"
114" x 40"	FPC-114X40	104x30" ~ 114x40"
130" x 30"	FPC-130X30	120x20" ~ 130x30"



EVOLUTION 360 AND H2Oonfire COVERS

Model	Style
FPC-84WB	Basin
FPC-35	Bowl



TK TORCH COVER - (FPC-TK TORCH)

TK Torch Cover w/Elastic Hem (3.5" Top Dia x 9.5" Bottom Dia. x 14" Height)



STAINLESS STEEL ACCESS DOORS

Stainless steel access doors are available for all FPPK and MLFPK Hard pipe Models.

Model	Style
AD-RM6X6SS	6x6 Recess Mount
AD-RM8X8SS	8x8 Recess Mount
AD-SM8X8SS	8x8 Surface Mount



ENCLOSURE VENTS

Stainless Steel vents for enclosures.

Material	Style	Size	Model
Stainless	Flat	9"x4"	EV-8X4SS
	Flat	12"x6"	EV-12X6SS
	Louvered	14"x4.5"	EV-14X4.5SS



FLAME CONTROL SYSTEMS

MANUAL SPARK, FLAME SENSING (FPPK) CONTROL SYSTEMS

This system utilizes a standing pilot with thermocouple sensing to safely control gas flow, manual flame height adjustment, manual switch spark igniter (battery operated), and a safety pilot valve mounted in a stainless steel box.


See chart for recommended burner size.

Includes: Assembled stainless steel control box, 36" pilot assembly with spark igniter, and blowout box, flex line, hard pipe, and fittings.

Recommended FPPK Burner Size

Burner Type	Size w/ FPPK-HC	Size w/ FPPK-MC
Penta Series	18" ~ 30"	12" ~ 24"
Round Burner	18" ~ 30"	12" ~ 18"
H-Burner Series	30"X8" ~ 48"X10"	24"X6" ~ 30"X8"
Square Burner	18" ~ 24"	12" ~ 18"
T-Burner	50" ~ 72"	36" ~ 48"

NOTE: Burner too small could result in unsafe LP backpressure. Burner too large could result in small, undesirable flame height.

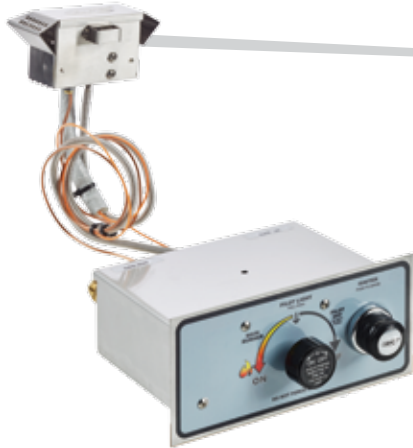

Size: 7.5"x6.5"x2.6"


Max BTU	Gas Type	Models
140k	Natural Gas	FPPK-HC-NG
	Liquid Propane	FPPK-HC-LP
90k	Natural Gas	FPPK-MC-NG
	Liquid Propane	FPPK-MC-LP



PILOT ASSEMBLY AND BLOWOUT BOX



FPPK Control Box
FPPK-NG
FPPK-LP
Manual Spark, Flame Sense (7.5"x5"x2"), 3/8" System
90k Btu NG, 90k Btu LP

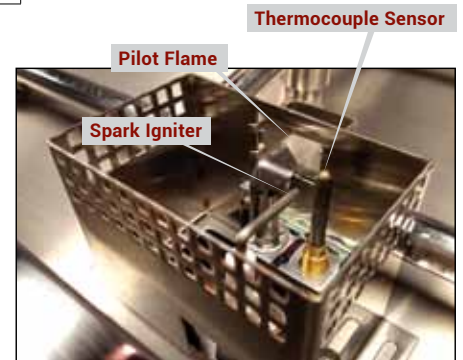

Thermocouple Sensor

Pilot Flame

Spark Igniter

MATCH LIT, FLAME SENSING (FPSPK) CONTROL SYSTEM

Match lit safety pilot control system with flame recognition and manual flame height adjustment. Up to 90k Btu output.

See chart for recommended burner size.

Includes: Assembled stainless steel control box, 48" pilot assembly and blowout box and flex line.

FPSPK
Match Lit (4.75" x 3.5" x 2"), Flame Sense,
3/8" System, up to 90k Btu

When ordering, please specify gas type.

Recommended FPSPK Burner Size

Burner Type	Recommended Size
Penta Series	12" ~ 24"
Round Burner	12" ~ 18"
H-Burner Series	24"X6" ~ 30"X8"
Square Burner	12" ~ 18"
T-Burner	36" ~ 48"

NOTE: Burner too small could result in unsafe LP backpressure. Burner too large could result in small, undesirable flame height.



OUTDOOR BURNERS

OUTDOOR BURNERS

HPC is the leader in fire ring technology and selection. All fire rings have staggered burner ports for a better flame pattern and a more significant flame presence. Both stainless steel and cold rolled steel are available—they feature ports that are drilled not punched; hub is raised above burner to reduce risk of water in valve or gas line.

There are two available flow-types. Standard capacity fire rings are constructed with 1/2" hub and tubing. For more flame the High Capacity (HC) fire rings have 3/4" hub and tubing.



Included in all LP Kits:
Burner, Air mixer, fittings

The LP Kit includes the burner, properly sized air mixer, and fittings.

The NG Kit includes the burner.

PENTA BURNERS- STAINLESS STEEL (#304)

Size	Gas Type	Model	Inlet (FPT)	Btu	BULK CARTON	5% DISCOUNT	
						Model	Bulk Qty.
12"	Natural Gas	PENTA12 KIT	1/2"	65k		PENTA12	10
	Liquid Propane	PENTA12LP KIT				PENTA18	10
18"	Natural Gas	PENTA18 KIT	1/2"	125k		PENTA24	10
	Liquid Propane	PENTA18LP KIT				PENTA30	5
24"	Natural Gas	PENTA24 KIT	1/2"	200k		PENTA36	5
	Liquid Propane	PENTA24LP KIT				PENTA48	5
30"	Natural Gas	PENTA30 KIT	3/4"	250k		INCLUDES BURNERS ONLY	
	Liquid Propane	PENTA30LP KIT					
36"	Natural Gas	PENTA36 KIT	3/4"	300k			
	Liquid Propane	PENTA36LP KIT					
48"	Natural Gas	PENTA48 KIT	3/4"	300k			
	Liquid Propane	PENTA48LP KIT					

Features:
Burner Ports - 12 and 3 o'clock
Raised Hub Design
Patented Technology


Penta Burner



See Pg. 11 for Penta Burner Features

ROUND BURNER- STAINLESS STEEL (#304)

Size	Gas Type	Model	Inlet (FPT)	Btu	BULK CARTON	5% DISCOUNT	
						Model	Bulk Qty.
6"	Natural Gas	FRS-6 KIT	1/2"	60k		FRS6	10
	Liquid Propane	FRS-6LP KIT				FRS12	10
12"	Natural Gas	FRS-12 KIT	1/2"	90k		FRS18	10
	Liquid Propane	FRS-12LP KIT				FRS24	10
18"	Natural Gas	FRS-18 KIT	1/2"	150k		FRS24HC	10
	Liquid Propane	FRS-18LP KIT				FRS30	5
24"	Natural Gas	FRS-24 KIT	1/2"	150k		FRS30HC	5
	Liquid Propane	FRS-24LP KIT				FRS36HC	5
24" (HC)	Natural Gas	FRS-24HC KIT	3/4"	300k		FRS48HC	5
	Liquid Propane	FRS-24HCLP KIT				INCLUDES BURNERS ONLY	
30"	Natural Gas	FRS-30 KIT	1/2"	300k			
	Liquid Propane	FRS-30LP KIT					
30" (HC)	Natural Gas	FRS-30HC KIT	3/4"	300k			
	Liquid Propane	FRS-30HCLP KIT					
36"	Natural Gas	FRS-36HC KIT	3/4"	300k			
	Liquid Propane	FRS-36HCLP KIT					
48"	Natural Gas	FRS-48HC KIT	3/4"	300k			
	Liquid Propane	FRS-48HCLP KIT					

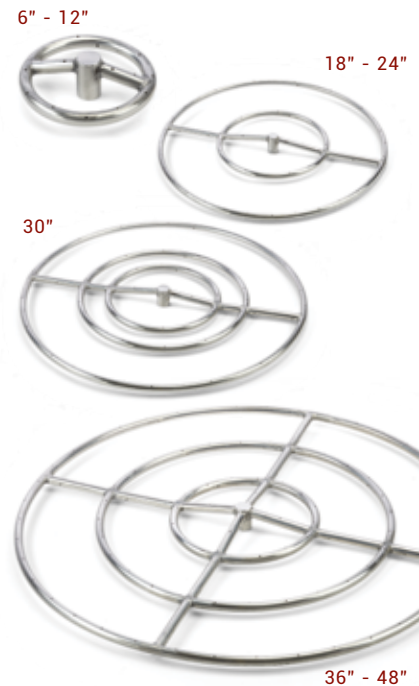

Features:
Burner Ports - Staggered
Raised Hub Design


OUTDOOR BURNERS (CONTINUED)

ROUND BURNERS- COLD ROLLED STEEL (BLACK)

Size	Gas Type	Model	Inlet (FPT)	Btu
12"	Natural Gas	FR-12 KIT	1/2"	90k
	Liquid Propane	FR-12LP KIT		
18"	Natural Gas	FR-18 KIT	1/2"	150k
	Liquid Propane	FR-18LP KIT		
24"	Natural Gas	FR-24 KIT	1/2"	150k
	Liquid Propane	FR-24LP KIT		
30"	Natural Gas	FR-30 KIT	1/2"	300k
	Liquid Propane	FR-30LP KIT		
36"	Natural Gas	FR-36 KIT	1/2"	300k
	Liquid Propane	FR-36LP KIT		

5% DISCOUNT	
Model	Bulk Qty.
FR12	10
FR18	10
FR24	10
FR30	5
FR36	5
INCLUDES BURNERS ONLY	

BULK CARTON

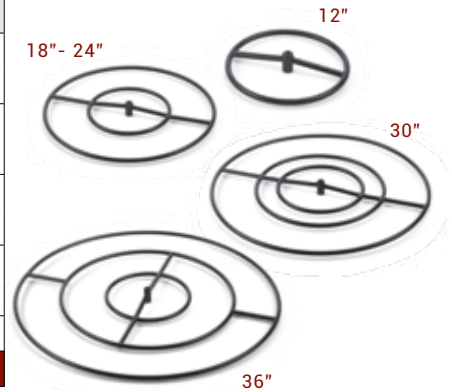


SQUARE BURNERS- STAINLESS STEEL (#304)

Size	Gas Type	Model	Inlet (FPT)	Btu
12"	Natural Gas	FRSSQ-12 KIT	1/2"	90k
	Liquid Propane	FRSSQ-12LP KIT		
18"	Natural Gas	FRSSQ-18 KIT	1/2"	150k
	Liquid Propane	FRSSQ-18LP KIT		
24"	Natural Gas	FRSSQ-24 KIT	1/2"	150k
	Liquid Propane	FRSSQ-24LP KIT		
36"	Natural Gas	FRSSQ-36HC KIT	3/4"	300k
	Liquid Propane	FRSSQ-36HCLP KIT		
48"	Natural Gas	FRSSQ-48HC KIT	3/4"	300k
	Liquid Propane	FRSSQ-48HCLP KIT		

5% DISCOUNT	
Model	Bulk Qty.
FRSSQ12	10
FRSSQ18	10
FRSSQ24	10
FRSSQ36HC	5
FRSSQ48HC	5
INCLUDES BURNERS ONLY	

BULK CARTON

Features:
Burner Ports - Staggered
Raised Hub Design

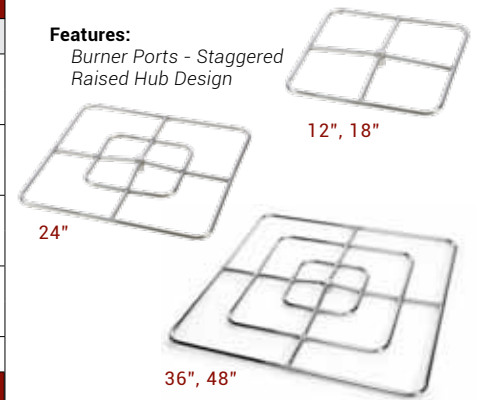


RECTANGLE BURNERS- STAINLESS STEEL (#304)

Size	Gas Type	Model	Inlet (FPT)	Btu
12"x 6"	Natural Gas	FRSR-12X6 KIT	1/2"	90k
	Liquid Propane	FRSR-12X6LP KIT		
18"x 9"	Natural Gas	FRSR-18X9 KIT	1/2"	150k
	Liquid Propane	FRSR-18X9LP KIT		
24"x 12"	Natural Gas	FRSR-24X12 KIT	1/2"	150k
	Liquid Propane	FRSR-24X12LP KIT		
36"x 18"	Natural Gas	FRSR-36X18 KIT	1/2"	200k
	Liquid Propane	FRSR-36X18LP KIT		
48"x 24"	Natural Gas	FRSR-48X24HC KIT	3/4"	300k
	Liquid Propane	FRSR-48X24HCLP KIT		

5% DISCOUNT	
Model	Bulk Qty.
FRSR12X6	10
FRSR18X9	10
FRSR24X12	10
FRSR36X18	5
FRSR48X24HC	5
INCLUDES BURNERS ONLY	

BULK CARTON

Features:
Burner Ports - Staggered
Raised Hub Design

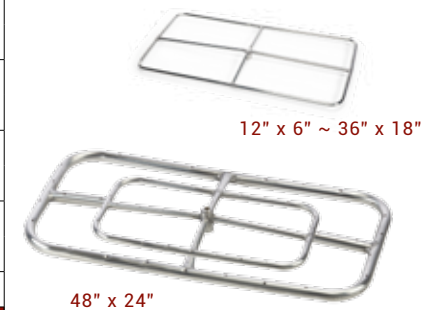

LINEAR BURNERS- INTERLINK PAN & T-BURNER, STAINLESS STEEL (#304)


Size (A")	Gas Type	Model	Inlet (MPT)	Btu
25"X 8"	Natural Gas	IL25X8SS	1/2"	50k
	Liquid Propane	IL25X8SS-LP		
37"X 8"	Natural Gas	IL37X8SS	1/2"	75k
	Liquid Propane	IL37X8SS-LP		
49"X 8"	Natural Gas	IL49X8SS	1/2"	100k
	Liquid Propane	IL49X8SS-LP		
61"X 8"	Natural Gas	IL61X8SS	1/2"	125k
	Liquid Propane	IL61X8SS-LP		
73"X 8"	Natural Gas	IL73X8SS	1/2"	150k
	Liquid Propane	IL73X8SS-LP		
97"X 8"	Natural Gas	IL97X8SS	1/2"	200k
	Liquid Propane	IL97X8SS-LP		
121"X 8"	Natural Gas	IL121X8SS	1/2"	250k
	Liquid Propane	IL121X8SS-LP		

Features:

Sidewalls add strength and hold media
Burner Ports - Staggered
Removable center section on some models
Raised Hub Design

Includes:

Pan, Burner and Brackets

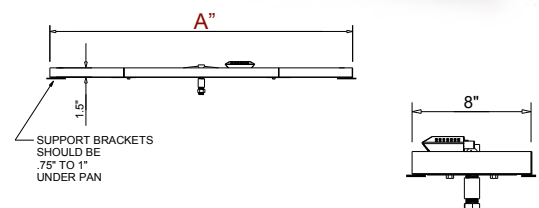


LINEAR BURNERS- TROUGH PAN & T-BURNER STAINLESS STEEL (#304)



Size (A")	Gas Type	Model	Inlet (MPT)	Btu
24"	Natural Gas	24SS TRGH	1/2"	50k
	Liquid Propane	24SS TRGH-LP		
36"	Natural Gas	36SS TRGH	1/2"	75k
	Liquid Propane	36SS TRGH-LP		
48"	Natural Gas	48SS TRGH	1/2"	100k
	Liquid Propane	48SS TRGH-LP		
60"	Natural Gas	60SS TRGH	1/2"	125k
	Liquid Propane	60SS TRGH-LP		
72"	Natural Gas	72SS TRGH	1/2"	150k
	Liquid Propane	72SS TRGH-LP		
96"	Natural Gas	96SS TRGH	1/2"	200k
	Liquid Propane	96SS TRGH-LP		

Includes:
Pan, Burner and Brackets

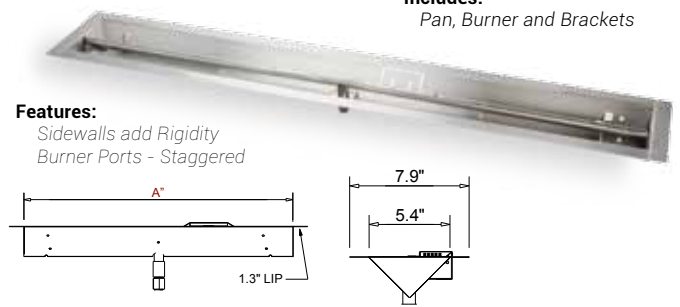


Features:
Sidewalls add Rigidity
Burner Ports - Staggered

HPC is currently phasing out the V-style trough as inventories are depleted- we are replacing with a new design. All dimensions for both types are the same (L, W & H).

RECTANGLE BURNERS- STAINLESS STEEL (#304)

Size (A")	Gas Type	Model	Inlet (FPT)	Btu
24" x 12"	Natural Gas	24X12SS-H	1/2"	60k
	Liquid Propane	24X12SS-H-LP		
30" x 12"	Natural Gas	30X12SS-H	1/2"	90k
	Liquid Propane	30X12SS-H-LP		
36" x 14"	Natural Gas	36X14SS-H	1/2"	90k
	Liquid Propane	36X14SS-H-LP		
42" x 14"	Natural Gas	42X14SS-H	1/2"	150k
	Liquid Propane	42X14SS-H-LP		
54" x 16"	Natural Gas	54X16SS-H	1/2"	150k
	Liquid Propane	54X16SS-H-LP		
66" x 16"	Natural Gas	66X16SS-H	1/2"	250k
	Liquid Propane	66X16SS-H-LP		
78" x 16"	Natural Gas	78X16SS-H	1/2"	300k
	Liquid Propane	78X16SS-H-LP		
90" x 16"	Natural Gas	90X16SS-H	1/2"	300k
	Liquid Propane	90X16SS-H-LP		

Includes:
Pan, Burner and Brackets

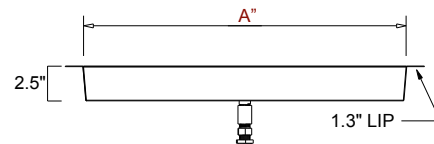

Features:
Burner Ports - Staggered
Raised Hub Design
Sidewalls add Structure and Hold Media

LINEAR T-BURNERS- RAISED HUB, STAINLESS STEEL (#304)

Size	Gas Type	Model	Inlet (FPT)	Btu
24"	Natural Gas	LTBSS24	1/2"	50k
	Liquid Propane	LTBSS24LP		
36"	Natural Gas	LTBSS36	1/2"	75k
	Liquid Propane	LTBSS36LP		
48"	Natural Gas	LTBSS48	1/2"	100k
	Liquid Propane	LTBSS48LP		
60"	Natural Gas	LTBSS60	1/2"	125k
	Liquid Propane	LTBSS60LP		
72"	Natural Gas	LTBSS72	1/2"	150k
	Liquid Propane	LTBSS72LP		
96"	Natural Gas	LTBSS96	1/2"	200k
	Liquid Propane	LTBSS96LP		
120"	Natural Gas	LTBSS120	1/2"	250k
	Liquid Propane	LTBSS120LP		

Features:
Burner Ports - Staggered
Raised Hub Design



Photo - Hearth Products Controls

OUTDOOR BURNERS (CONTINUED)

LINEAR T-BURNERS- FLAT DESIGN, STAINLESS STEEL (#304)

Size	Gas Type	Model	Inlet (MPT)	Btu
24"	Natural Gas	TBSS24	1/2"	50k
	Liquid Propane	TBSS24LP		
36"	Natural Gas	TBSS36	1/2"	75k
	Liquid Propane	TBSS36LP		
48"	Natural Gas	TBSS48	1/2"	100k
	Liquid Propane	TBSS48LP		
60"	Natural Gas	TBSS60	1/2"	125k
	Liquid Propane	TBSS60LP		
72"	Natural Gas	TBSS72	1/2"	150k
	Liquid Propane	TBSS72LP		
96"	Natural Gas	TBSS96	1/2"	200k
	Liquid Propane	TBSS96LP		

Features:
 Burner Ports - Staggered
 Low profile Flat Design




S-FIRE BURNERS- STAINLESS STEEL (#304)

Size	Gas Type	Model	Inlet (MPT)	Btu
30"	Natural Gas	SFIRE30 KIT	1/2"	75K
	Liquid Propane	SFIRE30LP KIT		
36"	Natural Gas	SFIRE36 KIT	1/2"	85K
	Liquid Propane	SFIRE36LP KIT		
48"	Natural Gas	SFIRE48 KIT	1/2"	110K
	Liquid Propane	SFIRE48LP KIT		
60"	Natural Gas	SFIRE60 KIT	1/2"	135K
	Liquid Propane	SFIRE60LP KIT		
72"	Natural Gas	SFIRE72 KIT	1/2"	165K
	Liquid Propane	SFIRE72LP KIT		

BULK CARTON	5% DISCOUNT	
	Model	Bulk Qty.
	SFIRE30	10
	SFIRE36	10
	SFIRE48	10
	SFIRE60	10
SFIRE72	10	
INCLUDES BURNERS ONLY		

Features:
 Burner Ports - Small Separation
 for Distinctive S-Pattern Flame
 Raised Hub Design

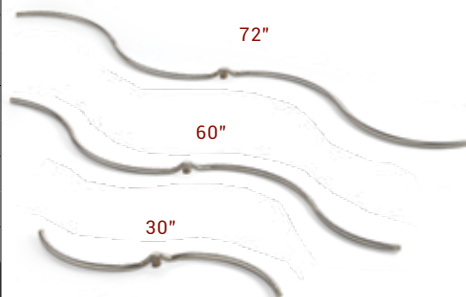

FIRE PIT H-BURNERS- STAINLESS STEEL (#304)

Size	Gas Type	Model	Inlet (FPT)	Btu
18"x 6"	Natural Gas	HBSB18 KIT	1/2"	60k
	Liquid Propane	HBSB18LP KIT		
24"x 6"	Natural Gas	HBSB24 KIT	1/2"	90k
	Liquid Propane	HBSB24LP KIT		
30"x 8"	Natural Gas	HBSB30 KIT	1/2"	90k
	Liquid Propane	HBSB30LP KIT		
36"x 8"	Natural Gas	HBSB36 KIT	1/2"	150k
	Liquid Propane	HBSB36LP KIT		
48"x 10"	Natural Gas	HBSB48 KIT	1/2"	150k
	Liquid Propane	HBSB48LP KIT		
60"x 10"	Natural Gas	HBSB60 KIT	1/2"	250k
	Liquid Propane	HBSB60LP KIT		
72"x 10"	Natural Gas	HBSB72 KIT	1/2"	300k
	Liquid Propane	HBSB72LP KIT		
84"x 10"	Natural Gas	HBSB84 KIT	1/2"	300k
	Liquid Propane	HBSB84LP KIT		

BULK CARTON	5% DISCOUNT	
	Model	Bulk Qty.
	HBSB18	10
	HBSB24	10
	HBSB30	10
	HBSB36	10
HBSB48	10	
HBSB60	10	
HBSB72	10	
HBSB84	10	
INCLUDES BURNERS ONLY		

Features:
 Burner Ports - Point Inward
 Raised Hub Design





FIREPLACE H-BURNERS- STAINLESS STEEL (#304)

Size	Gas Type	Model	Inlet (MPT)	Btu
12"x 6"	Natural Gas	HBS12 KIT	3/8"	60k
	Liquid Propane	HBS12LP KIT		
18"x 6"	Natural Gas	HBS18 KIT	3/8"	60k
	Liquid Propane	HBS18LP KIT		
24"x 6"	Natural Gas	HBS24 KIT	3/8"	90k
	Liquid Propane	HBS24LP KIT		
30"x 6"	Natural Gas	HBS30 KIT	1/2"	120k
	Liquid Propane	HBS30LP KIT		
36"x 6"	Natural Gas	HBS36 KIT	1/2"	150k
	Liquid Propane	HBS36LP KIT		
48"x 6"	Natural Gas	HBS48 KIT	1/2"	170k
	Liquid Propane	HBS48LP KIT		
60"x 6"	Natural Gas	HBS60 KIT	1/2"	200k
	Liquid Propane	HBS60LP KIT		

5% DISCOUNT	
Model	Bulk Qty.
HBS12	10
HBS18	10
HBS24	10
HBS30	10
HBS36	10
HBS48	10
HBS60	10
INCLUDES BURNERS ONLY	

BULK CARTON

Features:

- Burner Ports - Point Inward
- Low Profile
- Side Gas Inlet



DUAL BURNERS- STAINLESS STEEL (#304)


Size	Gas Type	Model	Inlet (MPT)	Btu
18"x 6"	Natural Gas	DSB-18 KIT	1/2"	90K
	Liquid Propane	DSB-18LP KIT		
24"x 6"	Natural Gas	DSB-24 KIT	1/2"	90k
	Liquid Propane	DSB-24LP KIT		
30"x 6"	Natural Gas	DSB-30 KIT	1/2"	150K
	Liquid Propane	DSB-30LP KIT		
36"x 6"	Natural Gas	DSB-36 KIT	1/2"	150k
	Liquid Propane	DSB-36LP KIT		

5% DISCOUNT	
Model	Bulk Qty.
DSB18	10
DSB24	10
DSB30	10
DSB36	10
INCLUDES BURNERS ONLY	

BULK CARTON

Features:

- Burner Ports - Staggered
- Side Gas Inlet

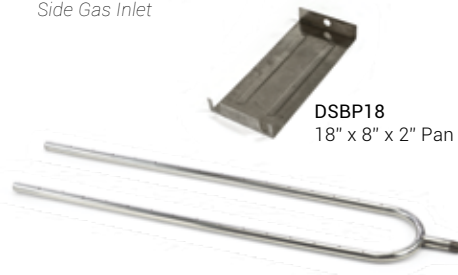

DSBP18
18" x 8" x 2" Pan

LOG LIGHTER BURNER- STAINLESS STEEL

Includes - stainless steel burner tube, LP air mixer or NG orifice, connector and end cap, El. Can be connected together in sections.

Custom Lengths Available

Model #	Size in inches	Gas
SS17N	17"	NG
SS17P	17"	LP



Photo- Hearth Products Controls

Need help? Use our fire pit selector at hpcfire.com

FIRE PIT COMPONENTS

EVERYTHING THE DESIGNER IN YOU COULD DREAM OF

Have your heart on building your dream pit? We have you covered on all the bases from outdoor burners to regulators. We will make sure you start off on the right foot.

FIRE PIT PANS

ROUND BOWL STYLE- STAINLESS STEEL (#304)

Size	Model	Thickness	Welded Nipple	SOLD SEPARATELY	FRSB-11
13"	570-13	18g	1/2"		3
19"	570-19	18g	1/2"		3
25"	570-25	18g	1/2"		3
31"	570-31	18g	1/2"		3
31"	570-31HC	18g	3/4"		3
37"	570-37HC	18g	3/4"		3
43"	570-43HC	18g	3/4"		3

May require use of FRSB-11
Burner Brackets - Sold Separately



ROUND FLAT STYLE- STAINLESS STEEL (#304)

Size	Model	Thickness	Welded Nipple	SOLD SEPARATELY	FRSB-11
7.75"	571-8	18g	1/2"		3
13.75"	571-14	18g	1/2"		3
17.75"	571-18	18g	1/2"		3
23.75"	571-24	18g	1/2"		3
29.75"	571-30	18g	1/2"		3
35.75"	571-36	18g	1/2"		3
35.75"	571-36HC	18g	3/4"		3
43.75"	571-42HC	18g	3/4"		3
53.75"	571-54HC	18g	3/4"		3



SQUARE FLAT STYLE- STAINLESS STEEL (#304)

Size	Model	Thickness	Welded Nipple	SOLD SEPARATELY	FRSB-11
18"	571-18SQ	18g	1/2"		3
24"	571-24SQ	18g	1/2"		3
30"	571-30SQ	18g	1/2"		3
36"	571-36HCSQ	18g	3/4"		3
42"	571-42HCSQ	18g	3/4"		3



SQUARE BOWL STYLE- STAINLESS STEEL (#304)

Size	Model	Thickness	Welded Nipple	SOLD SEPARATELY	FRSB-11
18"	570-18SQ	18g	1/2"		3
24"	570-24SQ	18g	1/2"		3
30"	570-30SQ	18g	1/2"		3
36"	570-36HCSQ	18g	3/4"		3
42"	570-42HCSQ	18g	3/4"		3



FRSB-11 BRACKET (SOLD SEPARATELY- STAINLESS STEEL (#304))

This unique bracket is universal to all HPC burners making them more rigid than competitive models. These brackets hold the burner in place alleviating issues with heat transfer warp in the burner and in the pan.



Available
May 2018



LINEAR TROUGH STYLE

Sold with T-Burner - See Pg. 57



LINEAR INTERLINK STYLE

Sold with T-Burner - See Pg. 56



RECTANGLE BOWL STYLE

Sold with H-Burner - See Pg. 57

FLEX LINE



STANDARD CAPACITY FLEX LINE

All standard capacity flex lines are 1/2" OD and 3/8" ID with 1/2" female pipe threads on one end and 3/8" male pipe threads on the other.

Model	Length	Max BTU/HR (NG)	Max BTU/HR (LP)	Flare Size	Fittings Included (Two)
SSC6	6"	110,000	177,000	1/2"	3/8" MIP, 1/2" FIP
SSC12	12"	102,000	163,200	1/2"	3/8" MIP, 1/2" FIP
SSC18	18"	93,000	148,960	1/2"	3/8" MIP, 1/2" FIP
SSC24	24"	85,000	136,000	1/2"	3/8" MIP, 1/2" FIP
SSC30	30"	77,000	123,360	1/2"	3/8" MIP, 1/2" FIP
SSC36	36"	71,000	113,760	1/2"	3/8" MIP, 1/2" FIP
SSC48	48"	60,500	96,800	1/2"	3/8" MIP, 1/2" FIP



HIGH CAPACITY FLEX LINE

All high capacity flex lines are 5/8" OD and 1/2" ID with 1/2" female pipe threads on one end and 1/2" male pipe threads on the other.

Model	Length	Max BTU/HR (NG)	Max BTU/HR (LP)	Flare Size	Fittings Included (Two)
SSC-HC12	12"	180,000	288,000	3/4"	1/2" MIP, 1/2" FIP
SSC-HC18	18"	164,000	262,700	3/4"	1/2" MIP, 1/2" FIP
SSC-HC24	24"	150,000	240,000	3/4"	1/2" MIP, 1/2" FIP
SSC-HC30	30"	136,000	217,600	3/4"	1/2" MIP, 1/2" FIP



ULTRA HIGH CAPACITY FLEX LINE

Model	Length	Max BTU/HR (NG)	Max BTU/HR (LP)	Flare Size	Fittings Included (Two)
SSC-HHC24	24"	291,000	465,400	1"	3/4" MIP, 3/4" FIP
SSC-HHC36	36"	256,000	409,400	1"	3/4" MIP, 3/4" FIP

TRANQUIL WHISTLE-FREE FLEX LINE

HPC has been a long time supplier of reliable, maintenance-free flex lines. We offer our Tranquil Flex Line Series to eliminate the nuisance whistling found on those tough installs. Sizes available in standard capacity are 12", 18", 24", and 30" lengths. These are stainless steel with 3/8" ID and are in stock and ready for shipment.

Model	Length	Max BTU/HR (NG)	Max BTU/HR (LP)	Flare Size	Fittings Included (Two)
SSC-W12	12"	102,000	163,200	1/2"	3/8" MIP, 1/2" FIP
SSC-W18	18"	93,000	148,960	1/2"	3/8" MIP, 1/2" FIP
SSC-W24	24"	85,000	136,000	1/2"	3/8" MIP, 1/2" FIP
SSC-W30	30"	77,000	123,360	1/2"	3/8" MIP, 1/2" FIP



TRANQUIL WHISTLE-FREE, STANDARD CAPACITY (BLACK)

Model	Length	Max BTU/HR (NG)	Max BTU/HR (LP)	Flare Size	Fittings Included (Two)
SSCB-W18	18"	93,000	148,960	1/2"	3/8" MIP, 1/2" FIP
SSCB-W24	24"	85,000	136,000	1/2"	3/8" MIP, 1/2" FIP
SSCB-W30	30"	77,000	123,360	1/2"	3/8" MIP, 1/2" FIP

* Natural Gas maximum Btu/hr: Straight Length Capacity; 0.64 SG, 1,000 Btu per Cu. Ft. at .5 water column pressure drop

** Liquid Propane Maximum Btu/hr: Straight Length Capacity; 1.55 SG, 2,500 Btu per Cu. Ft. at .5 water column pressure drop



Photo Courtesy of AEI Gas - Florida

FIRE PIT COMPONENTS (CONTINUED)

EVERYTHING THE DESIGNER IN YOU COULD DREAM OF

Have your heart on building your dream pit? We have you covered on all the bases from outdoor burners to regulators. We will make sure you start off on the right foot.

DECORATIVE KEY VALVES

Key Valve Part Numbers: Key Valves are numbered as either Angled or Straight, and based off of color. For example, MAFB is described as Manual Angled Flat Black. MSFB would be Manual Straight Flat Black.

STANDARD CAPACITY VALVES (1/2")

1/4 Turn angle or straight manual ball valve with flange and key. 1/2" inlet and outlet. For floor or wall mounting.

Recommended for gas shut off of 150k Btu or less

HIGH CAPACITY VALVES (3/4")

1/4 Turn angle or straight manual ball valve with flange and key. 3/4" inlet and outlet. For floor or wall mounting.


Recommended for gas shut off of 400k Btu or less

DANTE VALVE



CHROME FLANGE/ KEY

Valve	Inlet / Outlet	Models
Angle	1/2"	MACB
	3/4"	MACB-HC
Straight	1/2"	MSCB
	3/4"	MSCB-HC

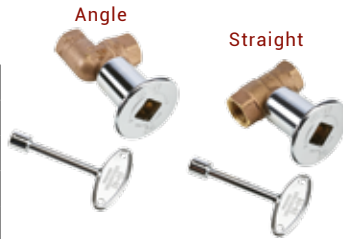

BRASS FLANGE/ KEY

Valve	Inlet / Outlet	Models
Angle	1/2"	MABB
	3/4"	MABB-HC
Straight	1/2"	MSBB
	3/4"	MSBB-HC



FLAT BLACK FLANGE/ KEY

Valve	Inlet / Outlet	Models
Angle	1/2"	MAFB
	3/4"	MAFB-HC
Straight	1/2"	MSFB
	3/4"	MSFB-HC



PEWTER FLANGE/ KEY

Valve	Inlet / Outlet	Models
Angle	1/2"	MAPW
	3/4"	MAPW-HC
Straight	1/2"	MSPW
	3/4"	MSPW-HC



ANTIQUE BRASS FLANGE/ KEY

Valve	Inlet / Outlet	Models
Angle	1/2"	MAAB
	3/4"	MAAB-HC
Straight	1/2"	MSAB
	3/4"	MSAB-HC



ANTIQUE COPPER FLANGE/ KEY

Valve	Inlet / Outlet	Models
Angle	1/2"	MAAC
	3/4"	MAAC-HC
Straight	1/2"	MSAC
	3/4"	MSAC-HC



FLANGE AND KEY ONLY



KEYS



FLANGE ONLY

304 L Polished Chrome Flange
306 L Polished Brass Flange

REGULATORS



770-150
150k Btu pressure regulator
Natural Gas : 5 psi input
Liquid Propane: 2 psi input
1/2"x1/2", 4"-12" water column



770-300
300k Btu pressure regulator
Natural Gas : 5 psi input
Liquid Propane: 2 psi input
1"x1", 4"-12" water column



770-13A15
MAXITROL Vent protector with a 1/8" inlet made for 770-150



770-13A15-5
MAXITROL Vent protector with a 3/8" inlet made for 770-300



658
100k Btu LP pressure regulator
3/8" x 3/8", 4"-12" water column

GRILL REPAIR REGULATOR & HOSE - LP



658/90-18
18" Rubber Hose
90 degree Regulator
100k Btu, 3/8 Fitting



658/90-36
36" Rubber Hose
90 degree Regulator
100k Btu, 3/8 Fitting



658SS/90-36
36" Braided SS Hose
90 degree Regulator
100k Btu, 3/8 Fitting

MISCELLANEOUS PARTS

SPARK IGNITER COMPONENTS



690-AA
Mounts easily with 2 screws. Use with external switch.
AA batteries easy to replace.
Sealed battery compartment.
Dual ignition outlets
(Replaces #690)



691AA-HPC
Screw-in cap holds unit in place.
Uses 1 AA battery. Sealed battery chamber. Easy Battery Replacement



130
Snap-in Type
One spark per button push.




131
Electrode to use with 130, 690, or 691

FPK PUSH BUTTON SPARK IGNITION KIT

Includes Spark Generator, Ignition, Mounting Plate and AA Battery

FPK

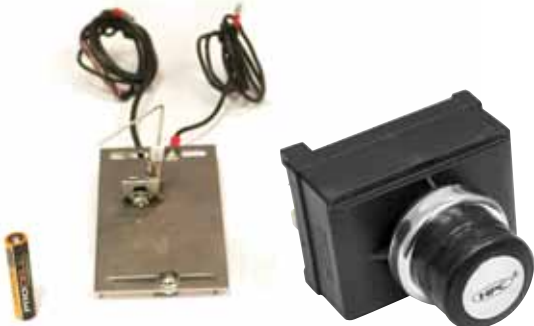

FPLP SERIES SMALL LP TANK CONVERSION KIT

Includes Regulator, Air Mixer, 12' Hose with quick disconnect, shut off valve, and fittings.

Minimum Burner Size: 12"

Minimum T-Burner Size: 48"

IMPORTANT: If using glass media, glass application to burner must be minimal to avoid backpressure. Read instructions carefully.

Not for use with HPC **Certified** Inserts



FPLP40 - 40k Btu
FPLP90 - 90k Btu

FIRE PIT COMPONENTS (CONTINUED)

EVERYTHING THE DESIGNER IN YOU COULD DREAM OF

HPC offers everything you need to turn your fire pit into the work of art and outdoor focal point that it is. With one stop shopping you can spend less time finding media and accessories and more time enjoying your outdoor fire pit.

PRO-FLEX LINE AND ACCESSORIES

PRO-FLEX GAS LINE

The Pro-Flex Line is CSA Certified to meet strict codes. See our grounding kit below, necessary to meet codes. Includes adjustable 1/2" to 1" grounding clamp and 50' of 6 gauge wire.

Models	Spool Size	Line Size
PFCT 1275	75 ft	1/2"
PFCT 3475	75 ft	3/4"
PFCT 12225	225 ft	1/2"
PFCT 34225	225 ft	3/4"



PRO-FLEX FITTINGS

Model	Size	Fitting	Box QTY
PFFN 1212B	1/2"	Female	12
PFMF 1212B	1/2"	Male	12
PFTP 1212B	1/2"	Termination Flange	12
PFMF 3406B	3/4"	Male	6

NATURAL GAS/LP QUICK DISCONNECT HOSE ASSEMBLY (580)

144" x 3/8" I.D.
Gray PVC Galvanized Steel Hose
CSA-AGA/CGA approved to -40 Degrees F

Quick Disconnect Nipple and Socket dust cap
Attached Hose and Quick Disconnect Installation Instructions

NATURAL GAS/PROPANE BBQ AND APPLIANCE OUTLET (581)

Designed for Indoor/Outdoor Application
Heavy Duty 20 Gauge Stainless Steel Outlet Cover
CSA-AGA/CGA Approved to -40 Degrees F
60k Btu Natural Gas, 90k Btu Propane Gas

5 PSIG maximum operation pressure
Lockable safety feature denies connect/disconnect while gas is flowing.
Manual gas valve with appliance connection.

Models	Description
580	144"x3/8" with quick disconnect assembly
580-1	144x3/8" with Male Quick Disconnect Only
580-V	Female Quick Disconnect Fitting
581	Appliance Outlet



REPLACEMENT COMPONENTS

EI SERIES REPLACEMENT COMPONENTS

Item	Model
On/Off & High/Low Models	
Hot Surface Igniter	312-IGNITER
Thermocouple- 36"	311-T/C
Electronic Module	312-EIMOD
Transformer	576-75VA
Fuse (5A)	See Note*
On / Off Models Only	
Gas Valve	210-EI415
High / Low Models Only	
Remote- Handheld	312-REMOTE
Remote- Transceiver	312-W/T
Antenna	312-ANTENNA
Antenna Bracket	312-AB
Antenna Extension Cable - 60"	AEK-60HI/LO
Gas Valve- 2 Stage	312-2STAGE415

EI SERIES REPLACEMENT PILOT ASSEMBLIES - ON/OFF & HI/LO MODELS

Gas	Btu Rating (Main)	Model	Length
NG	50K ~ 275k	HSIP-36SS	36"
NG	300k Btu	HSIP-36SS-300NG	36"
NG	400k	HSIP-36SS-400NG	36"
LP	50K ~ 225k Btu	HSIP-36SS-50 / 225LP	36"
LP	250k ~ 400k Btu	HSIP-36SS-250 / 400LP	36"

*Commonly found fast acting 5A Fuse

REPLACEMENT COMPONENTS

HWI SERIES REPLACEMENT COMPONENTS

PLEASE NOTE: FOR MVK-HWI Control box we require the box be returned for repair. Please call use for support!




120-HWI
Burner Mount Clamp



311-T/C
36" Thermocouple



311-T/C 72
72" Thermocouple



311-T/C EXT
36" Extension



598HWI
Blowout Box



HWI-913
Igniter Repair Kit

HWI SERIES REPLACEMENT PILOT ASSEMBLIES

Gas	Btu Rating (Main)	Model	Length
NG	50K ~ 275k	HWIP-36SS	36"
NG	300k Btu	HWIP-36SS-300NG	36"
NG	400k	HWIP-36SS-400NG	36"
LP	50K ~ 225k Btu	HWIP-36SS-50 / 225LP	36"
LP	250k ~ 400k Btu	HWIP-36SS-250 / 400LP	36"

FPPK SERIES REPLACEMENT COMPONENTS



108-C
Safety Pilot Valve (90k),
FPPK-NG



109-C
Safety Pilot Valve (90k),
Rear Inlet Valve, 2010 FPPK
Model



110
Safety Pilot Valve (90k), Side
Inlet, used in FPPK-MC Box



691AA-HPC
Igniter Switch



FPPK-P36 NG
FPPK-P36 LP
36" Pilot Tube, T/C



598HWI
Blowout Box



111
Black Knob



902
Valve Face Plate Nut
(For 108-C Valve)



100-HC
High Capacity Valve (140k)
used in FPPK-HC Box



693
Igniter

FPK SERIES REPLACEMENT COMPONENTS



131
Spark Electrode



691AA-HPC
Igniter Switch

OTHER ELECTRONIC IGNITION COMPONENTS



576-40VA
24VAC Transformer - 40VA



576-100VA
24VAC Transformer - 100VA



210-EI
Honeywell 150k Valve



210-EIHC
Honeywell 270k Valve



210-EI415
Honeywell 415K Valve



210-EI MOD
Honeywell IPI Module

FIRE PIT COMPONENTS *(CONTINUED)*

EVERYTHING THE DESIGNER IN YOU COULD DREAM OF

HPC offers everything you need to turn your fire pit into the work of art and outdoor focal point that it is. With one stop shopping you can spend less time finding media and accessories and more time enjoying your outdoor fire pit.

REPLACEMENT COMPONENTS

EVOLUTION 360 AND H2ONFIRE REPLACEMENT COMPONENTS



980-2100
2,100 gph Water Pump

980-3200
3,200 gph Water Pump

980-4800
4,800 gph Water Pump



980-AF
Auto-fill Valve Assembly w/float



980-LLS
Low Level Sensor / Switch



980-LED BLUE 82
360 Bowl 90 degree LED Strip (82")



980-LED BLUE 8
4-Scupper LED Strip (8")



980-CVD-12W
LED Driver (12 Watt)



980-CVD-22W
LED Driver (22 Watt)



980-FILTER
Replacement Filter

FITTINGS AND NIPPLES



559
1/2" Cap



560
1/2" Street Elbow



561
1/2" Close Nipple



563
3/8" x 1 1/2" Nipple



564
1/2" Female to Female Elbow



565
1/2" Couple



566
1/2" to 3/8" Reducing Couple



567
1/2" Tee



568
1/2" Cross



588
3/4" to 1/2" Reducer



673
3/8" cap



678BRS
1/2" Brass Orifice Adapter



678BRS-HC
3/4" HC Brass Orifice Adapter



687
3/8" Street Elbow



688
3/8" Couple



701
3/4" Cross



594
3/4" Couple



588-1
1" to 3/4" Reducer



702
Stainless Steel 3/4" cap



584
3/4" Close Nipple



596
3/4" Street Elbow



596-1
3/4" 90 Degree Elbow



1/2" OR 3/4" Diameter Stainless Steel Nipples.
We can make any size!

APPENDIX (EI SERIES)



ELECTRONIC IGNITION INSERTS

THIS CHART WILL HELP YOU DECIDE WHAT SIZE AND HOW MUCH OF AN ACCESSORY IS NEEDED

Models	OPTIONAL COMPONENTS				MEDIA		
	Vinyl Covers** (Pg. 53)	Outdoor Logs*** (Pg. 50)	Wind Guards**** (Pg. 47)	Install Collar IC44SS-FF 2 per box (Pg. 48)	Lava Rock or Rolled Lava (Pg. 49)	Decorative Glass (Pg. 49)	River Rock (Pg. 48)
ROUND BOWL INSERTS (PG. 12)				1 Bag ~ 1/2 cu. ft. (Lbs) (Box)			
13SSEI	FPC-35	FPL12xx	WG23-D	1 Box	1 Bag	20	1
PENTA19EI	FPC-45	FPL17xx	WG30-D	1 Box	2 Bags	35	1
PENTA25EI	FPC-45	FPL24xx	WG30-D	1 Box	2 Bags	55	2
PENTA31EI	FPC-53	FPL24xx	WG38-D	1 Box	4 Bags	85	3
PENTA37EI	FPC-53	FPL36xx	WG48-D	2 Boxes	4 Bags	120	4
PENTA43EI	FPC-64	FPL48xx	WG48-D	2 Boxes	4 Bags	155	5
ROUND FLAT INSERTS (PG. 14)				1 Bag ~ 1/2 cu. ft. (Lbs) (Box)			
14FSSEI	FPC-35	FPL12xx	WG23-D	1 Box	1 Bag	25	1
PENTA18EI	FPC-45	FPL17xx	WG23-D	1 Box	2 Bags	30	1
PENTA24EI	FPC-45	FPL24xx	WG30-D	1 Box	2 Bags	50	2
PENTA30EI	FPC-53	FPL24xx	WG38-D	2 Boxes	2 Bags	75	3
PENTA36EI	FPC-53	FPL36xx	WG38-D	2 Boxes	4 Bags	110	4
PENTA42EI	FPC-64	FPL48xx	WG48-D	2 Boxes	4 Bags	150	5
PENTA54EI	FPC-76	FPL48xx	N/A	3 Boxes	6 Bags	250	8
SQUARE BOWL INSERTS (PG. 16)				1 Bag ~ 1/2 cu. ft. (Lbs) (Box)			
18SSEI-SQBL	FPC-48SQ	FPL17xx	WG25-SQ	1 Box	2 Bags	35	1
24SSEI-SQBL	FPC-48SQ	FPL24xx	WG31-SQ	2 Boxes	2 Bags	65	2
30SSEI-SQBL	FPC-60SQ	FPL24xx	WG37-SQ	2 Boxes	2 Bags	100	3
36SSEI-SQBL	FPC-60SQ	FPL36xx	WG43-SQ	2 Boxes	6 Bags	135	4
42SSEI-SQBL	FPC-60SQ	FPL48xx	WG49-SQ	2 Boxes	6 Bags	185	4
SQUARE FLAT INSERTS (PG. 18)				1 Bag ~ 1/2 cu. ft. (Lbs) (Box)			
18FSSEI-SQ	FPC-48SQ	FPL17xx	WG25-SQ	1 Box	2 Bags	35	1
24FSSEI-SQ	FPC-48SQ	FPL24xx	WG31-SQ	2 Boxes	2 Bags	65	2
30FSSEI-SQ	FPC-60SQ	FPL24xx	WG37-SQ	2 Boxes	2 Bags	100	3
36FSSEI-SQ	FPC-60SQ	FPL36xx	WG43-SQ	2 Boxes	6 Bags	135	4
42FSSEI-SQ	FPC-60SQ	FPL48xx	WG49-SQ	2 Boxes	6 Bags	185	4
RECTANGLE BOWL INSERTS (PG. 20)				1 Bag ~ 1/2 cu. ft. (Lbs) (Box)			
24X12SSEI-H	FPC-62X30	FPL17xx	WG31X19-RECT	1 Box	2 Bags	35	1
30X12SSEI-H	FPC-62X30	FPL24xx	WG37X19-RECT	1 Box	2 Bags	40	2
36X14SSEI-H	FPC-78X40	FPL24xx	WG43X21-RECT	2 Boxes	2 Bags	55	2
42X14SSEI-H	FPC-78X40	FPL36xx	WG49X21-RECT	2 Boxes	2 Bags	65	3
54X16SSEI-H	FPC-78X40	FPL36xx	WG61X23-RECT	2 Boxes	4 Bags	95	3
66X16SSEI-H	FPC-90X40	FPL36xx	N/A	2 Boxes	6 Bags	115	4
78X16SSEI-H	FPC-102X40	FPL36xx (2)	N/A	3 Boxes	6 Bags	135	4
90X16SSEI-H	FPC-114X40	FPL36xx (2)	N/A	3 Boxes	8 Bags	160	5
S-FIRE BURNER INSERTS (PG. 22)				1 Bag ~ 1/2 cu. ft. (Lbs) (Box)			
36X14SSEI-S	FPC-78X40	FPL24xx	WG43X21-RECT	2 Boxes	2 Bags	55	2
42X14SSEI-S	FPC-78X40	FPL36xx	WG49X21-RECT	2 Boxes	2 Bags	65	3
54X16SSEI-S	FPC-78X40	FPL36xx	WG61X23-RECT	2 Boxes	4 Bags	95	3
66X16SSEI-S	FPC-90X40	FPL36xx	N/A	2 Boxes	6 Bags	115	4
78X16SSEI-S	FPC-102X40	FPL36xx	N/A	3 Boxes	6 Bags	135	4

Notes: **Vinyl Covers: Part numbers listed are commonly used sizes- other vinyl sizes and Hard Covers available (Pg. 52).
 ***Outdoor Logs: Part numbers listed are commonly used sizes- other sizes available (Pg. 50).
 ****Wind Guards: Part numbers listed are commonly used sizes- other sizes available (Pg. 47).

APPENDIX (EI SERIES) - (CONTINUED)

Models	OPTIONAL COMPONENTS				MEDIA		
	Vinyl Covers** (Pg. 53)	Outdoor Logs*** (Pg. 50)	Wind Guards**** (Pg. 47)	Install Collar IC44SS-FF 2 per box (Pg. 48)	Lava Rock or Rolled Lava (Pg. 49)	Decorative Glass (Pg. 49)	River Rock (Pg. 48)

LINEAR TROUGH INSERTS (PG. 24)

24SSEI-TRGH	FPC-44X30	FPL14xx	WG31X15-L	1 Box	1 Bag	20	1
36SSEI-TRGH	FPC-62X30	FPL28xx	WG43X15-L	1 Box	2 Bags	25	1
48SSEI-TRGH	FPC-62X30	FPL14xx (2)	WG55X15-L	2 Boxes	2 Bags	35	1
60SSEI-TRGH	FPC-94X30	FPL28xx (2)	WG67X15-L	2 Boxes	2 Bags	40	1
72SSEI-TRGH	FPC-94X30	FPL28xx (3)	N/A	2 Boxes	2 Bags	50	2

LINEAR INTERLINK INSERTS (PG. 26)

25X8SSEI-L	FPC-44X30	FPL14xx	WG31X15-L	1 Box	1 Bag	20	1
37X8SSEI-L	FPC-62X30	FPL28xx	WG43X15-L	2 Boxes	2 Bags	25	1
49X8SSEI-L	FPC-62X30	FPL14xx (2)	WG55X15-L	2 Boxes	2 Bags	35	1
61X8SSEI-L	FPC-94X30	FPL14xx (2)	WG67X15-L	2 Boxes	2 Bags	40	2
73X8SSEI-L	FPC-94X30	FPL28xx (2)	N/A	2 Boxes	4 Bags	50	2
97X8SSEI-L	FPC-130X30	FPL28xx (3)	N/A	2 Boxes	4 Bags	60	2
121X8SSEI-L	FPC-130X30	FPL28xx (4)	N/A	2 Boxes	6 Bags	75	3

Notes: **Vinyl Covers: Part numbers listed are commonly used sizes- other vinyl sizes and Hard Covers available (Pg. 52).

***Outdoor Logs: Part numbers listed are commonly used sizes- other sizes available (Pg. 50).

****Wind Guards: Part numbers listed are commonly used sizes- other sizes available (Pg. 47).



Photo Courtesy of Media - New Jersey

APPENDIX (FPPK SERIES)



PUSH BUTTON / FLAME SENSE INSERTS

THIS CHART WILL HELP YOU DECIDE WHAT SIZE AND HOW MUCH OF AN ACCESSORY IS NEEDED

Models	OPTIONAL COMPONENTS					MEDIA		
	Gas Input Flex Line* (Pg. 61)	Vinyl Covers** (Pg. 53)	Outdoor Logs*** (Pg. 50)	Wind Guards**** (Pg. 47)	Install Collar IC44SS-FF 2 per box (Pg. 48)	Lava Rock or Rolled Lava (Pg. 49)	Decorative Glass (Pg. 49)	River Rock (Pg. 48)
ROUND BOWL INSERTS (PG. 13)						1 Bag ~ 1/2 cu. ft	(Lbs)	(Box)
FPPK13	SSC-HC24	FPC-35	FPL12xx	WG23-D	1 Box	1 Bag	20	1
PENTA19FPPK	SSC-HC24	FPC-45	FPL17xx	WG30-D	1 Box	2 Bags	35	1
PENTA25FPPK	SSC-HC24	FPC-45	FPL24xx	WG30-D	1 Box	2 Bags	55	2
PENTA31FPPK	SSC-HC24	FPC-53	FPL24xx	WG38-D	2 Boxes	4 Bags	85	3
PENTA37FPPK	SSC-HC24	FPC-53	FPL36xx	WG48-D	2 Boxes	4 Bags	120	4
ROUND FLAT INSERTS (PG. 15)								
FPPK14	SSC-HC24	FPC-35	FPL12xx	WG23-D	1 Box	1 Bag	25	1
PENTA18FPPK	SSC-HC24	FPC-45	FPL17xx	WG23-D	1 Box	2 Bags	30	1
PENTA24FPPK	SSC-HC24	FPC-45	FPL24xx	WG30-D	1 Box	2 Bags	50	2
PENTA30FPPK	SSC-HC24	FPC-53	FPL24xx	WG38-D	2 Boxes	2 Bags	75	3
PENTA36FPPK	SSC-HC24	FPC-53	FPL36xx	WG38-D	2 Boxes	4 Bags	110	4
SQUARE BOWL INSERTS (PG. 17)								
FPPK18-SQBL	SSC-HC24	FPC-48SQ	FPL17xx	WG25-SQ	1 Box	2 Bags	35	1
FPPK24-SQBL	SSC-HC24	FPC-48SQ	FPL24xx	WG31-SQ	2 Boxes	2 Bags	65	2
FPPK30-SQBL	SSC-HC24	FPC-60SQ	FPL24xx	WG37-SQ	2 Boxes	2 Bags	100	3
FPPK36-SQBL	SSC-HC24	FPC-60SQ	FPL36xx	WG43-SQ	2 Boxes	6 Bags	135	4
FPPK42-SQBL	SSC-HC24	FPC-60SQ	FPL48xx	WG49-SQ	2 Boxes	6 Bags	185	4
SQUARE FLAT INSERTS (PG. 19)								
FPPK18-SQ	SSC-HC24	FPC-48SQ	FPL17xx	WG25-SQ	1 Box	2 Bags	35	1
FPPK24-SQ	SSC-HC24	FPC-48SQ	FPL24xx	WG31-SQ	2 Boxes	2 Bags	65	2
FPPK30-SQ	SSC-HC24	FPC-60SQ	FPL24xx	WG37-SQ	2 Boxes	2 Bags	100	3
FPPK36-SQ	SSC-HC24	FPC-60SQ	FPL36xx	WG43-SQ	2 Boxes	6 Bags	135	4
FPPK42-SQ	SSC-HC24	FPC-60SQ	FPL48xx	WG49-SQ	2 Boxes	6 Bags	185	4
RECTANGLE BOWL INSERTS (PG. 21)								
FPPK24X12-H	SSC-HC24	FPC-62X30	FPL17xx	WG31X19-RECT	1 Box	2 Bags	35	1
FPPK30X12-H	SSC-HC24	FPC-62X30	FPL24xx	WG37X19-RECT	1 Box	2 Bags	40	2
FPPK36X14-H	SSC-HC24	FPC-78X40	FPL24xx	WG43X21-RECT	2 Boxes	2 Bags	55	2
FPPK42X14-H	SSC-HC24	FPC-78X40	FPL36xx	WG49X21-RECT	2 Boxes	2 Bags	65	3
FPPK54X16-H	SSC-HC24	FPC-78X40	FPL36xx	WG61X23-RECT	2 Boxes	4 Bags	95	3
S-FIRE BURNER INSERTS (PG. 23)								
36X14SSEI-S	SSC-HC24	FPC-78X40	FPL24xx	WG43X21-RECT	2 Boxes	2 Bags	55	2
42X14SSEI-S	SSC-HC24	FPC-78X40	FPL36xx	WG49X21-RECT	2 Boxes	2 Bags	65	3
54X16SSEI-S	SSC-HC24	FPC-78X40	FPL36xx	WG61X23-RECT	2 Boxes	4 Bags	95	3
LINEAR TROUGH INSERTS (PG. 25)								
FPPK24-TRGH	SSC-HC24	FPC-44X30	FPL14xx	WG31X15-L	1 Box	1 Bag	20	1
FPPK36-TRGH	SSC-HC24	FPC-62X30	FPL28xx	WG43X15-L	1 Box	2 Bags	20	1
FPPK48-TRGH	SSC-HC24	FPC-62X30	FPL14xx (2)	WG55X15-L	2 Boxes	2 Bags	30	1
FPPK60-TRGH	SSC-HC24	FPC-94X30	FPL28xx (2)	WG67X15-L	2 Boxes	2 Bags	40	1
FPPK72-TRGH	SSC-HC24	FPC-94X30	FPL28xx (3)	N/A	2 Boxes	2 Bags	50	2

Notes: *Gas Input Flex Line: Part numbers listed are 24" length- other lengths available. Flex Btu confirmation required. (Pg. 61).

Notes: **Vinyl Covers: Part numbers listed are commonly used sizes- other vinyl sizes and Hard Covers available (Pg. 52).

***Outdoor Logs: Part numbers listed are commonly used sizes- other sizes available (Pg. 50).

****Wind Guards: Part numbers listed are commonly used sizes- other sizes available (Pg. 47).

APPENDIX (FPPK SERIES) - (CONTINUED)

Models	OPTIONAL COMPONENTS					MEDIA		
	Gas Input Flex Line* (Pg. 61)	Vinyl Covers** (Pg. 53)	Outdoor Logs*** (Pg. 50)	Wind Guards**** (Pg. 47)	Install Collar IC44SS-FF 2 per box (Pg. 48)	Lava Rock or Rolled Lava (Pg. 49)	Decorative Glass (Pg. 49)	River Rock (Pg. 48)

LINEAR INTERLINK INSERTS (PG. 27)

FPPK25X8-L	SSC-HC24	FPC-44X30	FPL14xx	WG31X15-L	1 Box	1 Bag	20	1
FPPK37X8-L	SSC-HC24	FPC-62X30	FPL28xx	WG43X15-L	1 Box	2 Bags	25	1
FPPK49X8-L	SSC-HC24	FPC-62X30	FPL14xx (2)	WG55X15-L	2 Boxes	2 Bags	35	1
FPPK61X8-L	SSC-HC24	FPC-94X30	FPL14xx (2)	WG67X15-L	2 Boxes	2 Bags	40	2
FPPK73X8-L	SSC-HC24	FPC-94X30	FPL28xx (2)	N/A	2 Boxes	4 Bags	50	2
FPPK97X8-L	SSC-HC24	FPC-130X30	FPL28xx (3)	N/A	2 Boxes	4 Bags	60	2

APPENDIX (MLFPK SERIES)

MATCH LIT INSERTS

THIS CHART WILL HELP YOU DECIDE WHAT SIZE AND HOW MUCH OF AN ACCESSORY IS NEEDED

Models	OPTIONAL COMPONENTS					MEDIA		
	Gas Input Flex Line* (Pg. 61)	Vinyl Covers** (Pg. 53)	Outdoor Logs*** (Pg. 50)	Wind Guards**** (Pg. 47)	Install Collar IC44SS-FF 2 per box (Pg. 48)	Lava Rock or Roleed Lava (Pg. 49)	Decorative Glass (Pg. 49)	River Rock (Pg. 48)

ROUND BOWL INSERTS (PG. 13)

						1 Bag ~ 1/2 cu. ft.	(Lbs)	(Box)
PENTA13MLFPK	SSC24	FPC-35	FPL12xx	WG23-D	1 Box	1 Bag	20	1
PENTA19MLFPK	SSC24	FPC-45	FPL17xx	WG30-D	1 Box	2 Bags	35	1
PENTA25MLFPK	SSC24	FPC-45	FPL24xx	WG30-D	1 Box	2 Bags	55	2
PENTA31MLFPK	SSC24	FPC-53	FPL24xx	WG38-D	2 Boxes	4 Bags	85	3

ROUND FLAT INSERTS (PG. 15)

PENTA14MLFPK	SSC24	FPC-35	FPL12xx	WG23-D	1 Box	1 Bag	25	1
PENTA18MLFPK	SSC24	FPC-45	FPL17xx	WG23-D	1 Box	2 Bags	30	1
PENTA24MLFPK	SSC24	FPC-45	FPL24xx	WG30-D	1 Box	2 Bags	50	2
PENTA30MLFPK	SSC24	FPC-53	FPL24xx	WG38-D	2 Boxes	2 Bags	75	3

SQUARE BOWL INSERTS (PG. 17)

MLFPK18-SQBL	SSC24	FPC-48SQ	FPL17xx	WG25-SQ	1 Box	2 Bags	35	1
MLFPK24-SQBL	SSC24	FPC-48SQ	FPL24xx	WG31-SQ	2 Boxes	2 Bags	65	2
MLFPK30-SQBL	SSC24	FPC-60SQ	FPL24xx	WG37-SQ	2 Boxes	2 Bags	100	3

SQUARE FLAT INSERTS (PG. 19)

MLFPK18-SQ	SSC24	FPC-48SQ	FPL17xx	WG25-SQ	1 Box	2 Bags	35	1
MLFPK24-SQ	SSC24	FPC-48SQ	FPL24xx	WG31-SQ	2 Boxes	2 Bags	65	2
MLFPK30-SQ	SSC24	FPC-60SQ	FPL24xx	WG37-SQ	2 Boxes	2 Bags	100	3

RECTANGLE BOWL INSERTS (PG. 21)

MLFPK24X12-H	SSC24	FPC-62X30	FPL17xx	WG31X19-RECT	1 Box	2 Bags	35	1
MLFPK30X12-H	SSC24	FPC-62X30	FPL24xx	WG37X19-RECT	1 Box	2 Bags	40	2
MLFPK36X14-H	SSC24	FPC-78X40	FPL24xx	WG43X21-RECT	2 Boxes	2 Bags	55	2

S-FIRE BURNER INSERTS (PG. 23)

36X14SSEI-S	SSC24	FPC-78X40	FPL24xx	WG43X21-RECT	2 Boxes	2 Bags	55	2
-------------	-------	-----------	---------	--------------	---------	--------	----	---

LINEAR TROUGH INSERTS (PG. 25)

MLFPK24-TRGH	SSC24	FPC-44X30	FPL14xx	WG31X15-L	1 Box	1 Bag	20	1
MLFPK36-TRGH	SSC24	FPC-62X30	FPL28xx	WG43X15-L	1 Box	2 Bags	25	1
MLFPK48-TRGH	SSC24	FPC-62X30	FPL14xx (2)	WG55X15-L	2 Boxes	2 Bags	35	1

LINEAR INTERLINK INSERTS (PG. 27)

MLFPK25X8-L	SSC24	FPC-44X30	FPL14xx	WG31X15-L	1 Box	1 Bag	20	1
MLFPK37X8-L	SSC24	FPC-62X30	FPL28xx	WG43X15-L	2 Boxes	2 Bags	25	1
MLFPK49X8-L	SSC24	FPC-62X30	FPL14xx (2)	WG55X15-L	2 Boxes	2 Bags	35	1

POINT OF PURCHASE PRODUCTS

HPC DISPLAY KIOSK



HPC offers a very appealing and educational kiosk for your store front. It is constructed of long-lasting steel and powder coated for a professional look- and is very simple to assemble. The kiosk explains in Layman terms how to select and construct the style, shape, and technology of their fire pit with the help of the Dealer while using HPC fire pit inserts. The Kiosk Kit includes the kiosk stand, burners with placards, a laminated flip-book and several take-home brochures (replenished at no cost).



Flip Book Cover



Open Flip Book



Take-Home Brochures

LITERATURE



Style	Round
LIT-BROCHURE OUTDOOR	Night Impressions
LIT- CATALOG OUTDOOR	Outdoor Product Catalog
LIT- WATER BROCHURE OUTDOOR	Fire Meets Water Brochure
LIT- KIOSK BROCHURE	Ignite the Night Brochure

HPC DISPLAY STANDS

Need to display your fire pit inserts? Our steel display stands give full access to the insert for your customer to look at every detail!

The fire pit insert displays are available as follows:

- 1) Push Button / Spark Ignition (FPPK) Display Kit- includes applicable FPPK fire pit insert, match lit insert control valve (327-CH) and the display stand.
- 2) Electronic Ignition (EI) Display Kit- includes applicable EI fire pit insert and the display stand.
- 3) Stand Only

FOR DISPLAY ONLY! NOT FOR OUTDOOR INSTALLATION

Style	Round	Rectangle	Linear Trough	Linear- Interlink	Description
	DS25-ROUND-FPPK	DS30X12-HBURNER-FPPK	DS36-TRGH-FPPK	DS49X8-LINEAR-FPPK	Includes Push Button / Spark Ignition fire pit insert match lit valve, mounting sleeve & stand.
	DS25-ROUND-EI	DS30X12-HBURNER-EI	DS36-TRGH-EI	DS49X8-LINEAR-EI	Includes Electronic Ignition fire pit insert and display stand.
Stand Only	DS25-ROUND	DS30X12-HBURNER	DS36-TRGH	DS49X8-LINEAR	Includes stand only.



DS25-ROUND-FPPK

For use with 25" Round Insert



DS30x12-HBURNER-FPPK

For use with 30x12" H-Burner Insert



DS36-TRGH-FPPK

For use with 36" Trough Insert



DS49X8-LINEAR-FPPK

For use with 49"x8" Interlink Insert

POINT OF PURCHASE BANNER



BANNER KITS

48"x30" Banner for storefront display

Model	Description
BANNER KIT	Coroplast (Rigid Plastic Board)
BANNER KIT-OUTDOOR	Vinyl Outdoor Banner with gromits in the corners

BANNER KIT and BANNER KIT-OUTDOOR

SHOW US YOUR PROJECTS

We want your pictures! HPC is constantly looking for new finished installations and interesting projects to feature in our advertising. Let us promote your company by sending us images of your projects and installs, and get some credit on your HPC account for doing so!

- HPC Products installed and finished with enclosure, media, logs, etc.
- High resolution .tif or .jpeg photos wanted!
- Burning shots at Dusk or Dawn preferred.
- Send to pics@hpcf.com, earn \$25 credit per installation! (\$50 Maximum)
- Send multiple shots and angles of your best installations and receive up to \$50 credit.
- Please include P.O. number in subject line of email.
- NOTE: This is not available if receiving live burn program credit (Pg 3)

